

2 0 2 5
P R O D U C T C A T A L O G

PROFESSIONAL GRADE EQUIPMENT

True, the most trusted brand in commercial refrigeration



T R U E M I S S I O N

To design and manufacture a wide range of commercial refrigeration products that exceed industry quality standards at competitive prices

A HISTORY OF REFRIGERATION EXCELLENCE

1945
50

1960
70

1980
90



1940's

Bob, Frank & Art Trulaske develop the first Upright Freezer in their garage and True Refrigeration is born.



1960's

New GDM® Upright Glass Door Merchandiser's developed and bottler business continues to grow.



1980's

Continued success in the Foodservice industry backed by two core models, T-Series® Traditional Reach-In and the Sandwich/Salad Food Prep Tables.

1950's

Roll-Top units become more popular and True expands into international sales with coolers sold in the Caribbean and Central America.

1970's

True enters the Foodservice industry and develops new fan motor technology.



2000
10

2020
TODAY



1990's

Orders from U.S. chain accounts continue to grow and walls fall in Berlin accelerating True's growth internationally.



2010's

True introduces Curved Glass Display Merchandisers and unveils a state-of-the-art powder coating facility offering a customized look to True's lineup.

2020 - Today

True introduces Premier Bar Series and offer new Grab N Go® Open Air Merchandisers.

2000's

True introduces Spec Series® lineup and pioneers a more efficient and sustainable R290 Hydrocarbon refrigerant.



2024
Commercial Ice Machines
.....
True Retail Merchandisers






Sustainability

P L E D G E

True is committed in our efforts toward becoming a more sustainable entity and reducing our overall carbon footprint. We pledge to all of our employees and customers that we will continually search for eco-friendly components and processes that will help minimize the environmental impact of our company.

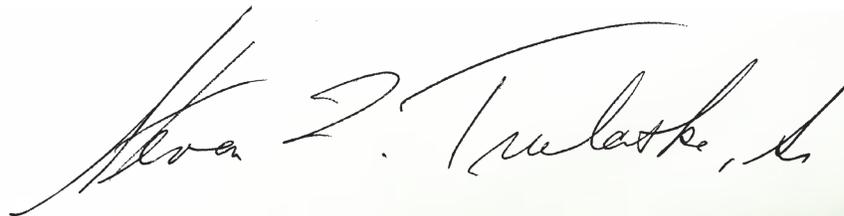

STEVEN L. TRULASKE Sr.

Owner/CEO



LEARN MORE

TRUE SETS THE STANDARD

You can trust that we do our part and more. Not only do we meet sustainability standards, we consistently surpass them. As Energy Star Partners, we take responsibility in leading the charge with green innovation. It's our duty as the largest commercial refrigeration manufacturers worldwide to ensure that our innovations in refrigeration are making the world a better place.

INNOVATION MEETS SUSTAINABILITY



RCU Technology

This envy of the industry comes standard in every True product. Our patented Reverse Condensing Fan Motor reduces energy consumption and holds the coolest temperatures – all while removing excess debris from the interior and surface of the condensing coil to increase its lifetime.



Lower Energy Cost

TRUE's vertically integrated higher-quality components mean less failure rate, shorter run times, and lower energy consumption. Coupled with the industry's in-class warranty means lower operating costs for you and an overall lifetime cost for your commercial refrigeration.



Sustainable Foam

Foamed in place, CFC-free, polyurethane, high-density insulation that provides unparalleled strength, rigidity, and increase to an already industry-exceeding insulation factor, with zero ozone depletion potential (ODP) and zero global warming potential (GWP).

TRUE IS PRIMED TO BE A ZERO WASTE FACILITY BY 2027

TRUE'S Green Promise, we are continually searching out environmentally friendly components and processes that will reduce our carbon footprint. This process encapsulates both our approach to manufacturing as well as our approach to the performance of our equipment. True is meeting and exceeding CEC and DOE energy standards without sacrificing quality. Solar Initiatives; True produces 700,000 kilowatt hours of energy – equal to reducing carbon emissions by 495 tons annually. Our 23 solar arrays are home to 2,070 solar panels and are seamlessly integrated into the Ameren Missouri power grid.

**PROUD WINNER
OF THE
2024**

Energy Star Partner of the Year
Sustained Excellence Award



**PARTNER OF THE YEAR
Sustained Excellence**

"True is committed to being a sustainable and responsible business. We seek eco-friendly components and processes to minimize the environmental impact of our operations and products."

– STEVE YOUNG
Director of Operations

RECOGNITION IN SUSTAINABLE INITIATIVES



the True difference



HC Refrigeration

By matching and balancing hydrocarbon refrigeration with the latest refrigeration components, True engineers environmentally friendly refrigeration systems with shorter run times, lower energy consumption, and the industry's coldest holding temperatures.



Designed in the USA

True is committed to producing high-quality products that are designed in the USA. True manufactures each cabinet using an industry-leading combination of high-quality metals and components designed to optimize cabinet performance.



Quality Components

True uses quality components to ensure a long life of refrigeration with minimal energy consumption.



Energy Efficiency

True is committed to eco-friendly manufacturing by meeting and surpassing energy standards while not sacrificing performance. By using oversized, higher-capacity, balanced refrigeration systems, True outperforms industry efficiency expectations.



High Density Insulation

True continues its commitment to sustainability with the use of foamed-in-place, CFC-free, polyurethane, high-density insulation that provides unparalleled strength and rigidity. In addition, an increase to an already industry-exceeding insulation factor, with zero ozone depletion potential (ODP) and zero global warming potential (GWP).



PVC Coated Shelving

True internally manufacture their own heavy-duty shelves utilizing larger diameter steel for strength with ½" spacing on top support bars for ease of use. The shelves are then bonded with powdered PVC to prevent chipping and peeling, which is prevalent in competitors' standard epoxy-coated shelves.



100% Run Testing

In order to verify that all units are manufactured properly and to spec, True runs tests on every single unit as part of the final quality inspection before releasing the unit into the finished goods inventory.



Abundant Availability

In its Missouri-based manufacturing facilities, True builds for inventory to provide a near 100% fill rate on standard items. This allows for the most optimal turnaround when the purchase order is received and processed.



After Sale Support

True's USA and Canada Foodservice warranties are the envy of the industry. At no additional cost, our customers enjoy the option of having the entire condensing unit replaced. This consists of a new compressor, condenser, start components, and fan motor, all of which are pre-assembled and shipped from the factory.



Manufacturing independence

True has complete control of manufacturing processes by investing in vertical integration. This allows us to streamline operations and take direct ownership of various stages in the production process rather than relying on international suppliers.



LEARN MORE

Vertically Integrated Processes

The customer gets the highest level product, direct, quick and at the best value.





STANDARD FOR ALL HC MODELS



Coldest
Temperatures
Freshest
Products




Increased
Life
Span!



20%
Less Energy
Consumption




A standard condensing unit works by drawing air through the condenser coil, cooling the refrigerant and the compressor.

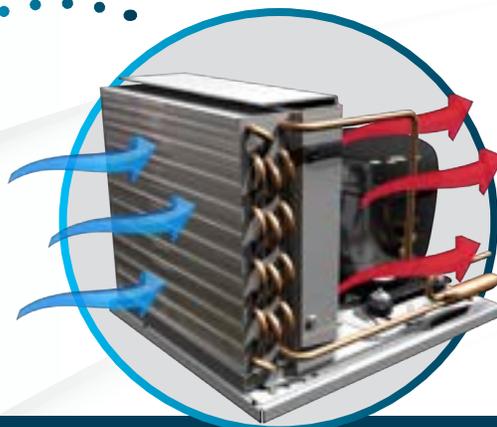



**SELF
CLEANING
TECHNOLOGY**

ELIMINATES
THE NEED TO CLEAN THE
CONDENSER COIL THROUGH
THE FULL WARRANTY

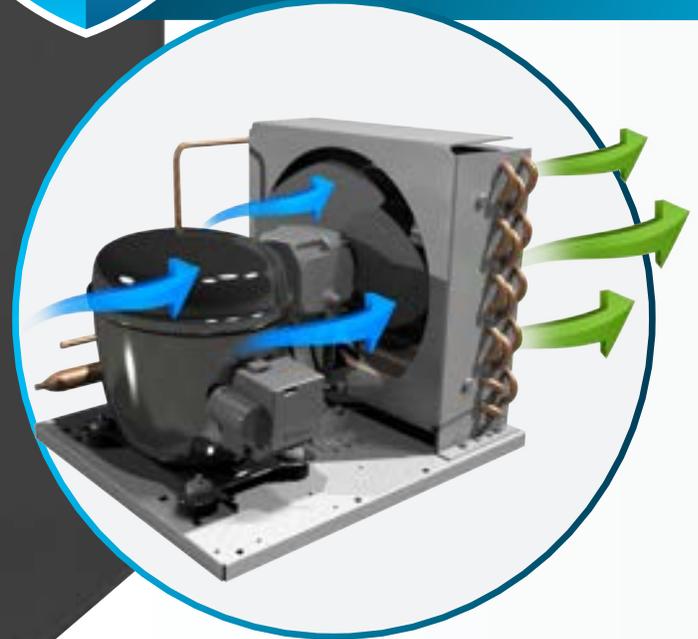

True's Self Cleaning Reverse Condensing Unit technology works by reversing the fan direction upon each startup of the unit, which causes air to blow through the condensing coil and effectively removes any dirt, dust, or debris.



LEARN MORE

World Headquarters O'Fallon, MO





Bowling Green Plant – Bowling Green, MO




Mexico, Missouri Plant – Mexico, MO



Pacific Plant – Pacific, MO



Monterrey, Nuevo León, Mexico

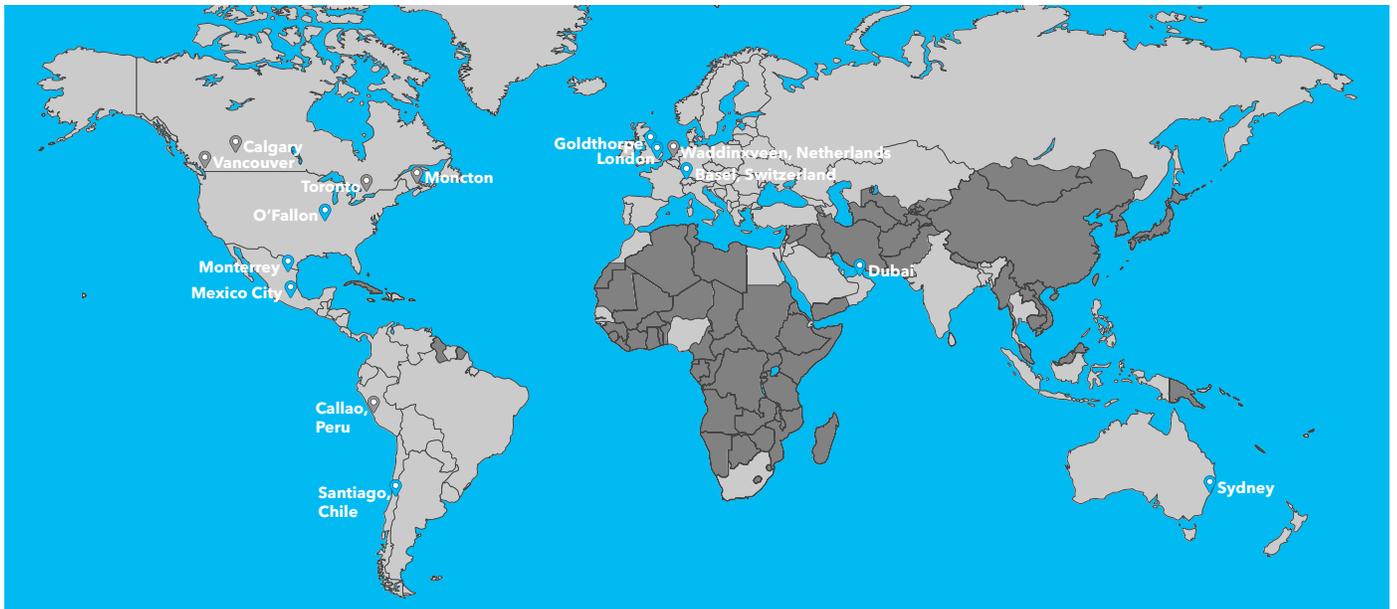

Equipment supplied and actively supported in over 100 countries around the world




Office & Distribution



Warehousing

Table of Contents

Reach-In Refrigeration



19

T-Series® Reach-In Refrigerators24
 T-Series® Pass-Thru Refrigerators.....24
 TSD-Series Slide Door Refrigerators26
 TS Series Reach-In Refrigerators.....28
 STR/STA/STG Reach-In Refrigerators.....30
 STR/STA/STG Pass-Thru Refrigerators32
 STR/STA/STG Roll-In Refrigerators34
 STR/STA/STG Roll-Thru Refrigerators34
 T-Series® Traditional Reach-In Freezers36
 TS Series Reach-In Freezers.....38
 STR/STA/STG Reach-In Freezers.....40
 STR/STA/STG Pass-Thru Freezers40
 STR/STA/STG Roll-In Freezers.....42
 DT Series Dual Temperature44
 STR/STA/STG Dual Temperature46

Food Prep Tables



48

TSSU® Sandwich/Salad Units.....50
 TSSU® Mega-Top Sandwich/Salad Units52
 TSSU®~SPEC3 Sandwich/Salad Units.....54
 TSSU® Mega Top~SPEC3 Sandwich/Salad Units.....56
 TSSU® ADA Compliant Packages & ~SPEC3 ADA58
 TSSU® Mega Top ADA Compliant Packages & ~SPEC3 ADA58
 TFP™ Food Prep Units & TFP~SPEC3.....60
 TPP® Pizza Prep Tables & TPP~SPEC362

Undercounters & Worktops



64

TUC® Undercounter Refrigerators68
 TFT™ Undercounter Flat Top Refrigerators ..68
 TUC® Deep Undercounter Refrigerators.....70
 TUC® Undercounter Refrigerators~SPEC3...72
 TUC® Undercounter Deep Refrigerators~SPEC3.....74
 TUC® Undercounter Freezers.....76
 TUC® Deep Undercounter Freezers.....78
 TUC® Undercounter Freezers~SPEC380
 TUC® Undercounter Deep Freezers~SPEC380
 TUC® Undercounter ADA Compliant Packages84
 TUC® Undercounter ADA Compliant~SPEC3 Packages.....84
 TUC® Undercounter Low Profile Castors.....84
 TUC® Undercounter Low Profile ~SPEC3 Castors.....84
 TWT™ Worktop Refrigerators88
 TWT™ Worktop Deep Refrigerators90
 TWT™ Worktop Refrigerators ~SPEC392
 TWT™ Worktop Deep Refrigerators ~SPEC3 ..94
 TWT™ Worktop Freezers.....96
 TWT™ Worktop Deep Freezers98
 TWT™ Worktop Freezers~SPEC3.....100
 TWT™ Worktop Deep Freezers~SPEC3102
 TWT™ Worktop ADA Compliant Packages 104

Chef Bases



106

TRCB™ Chef Base Refrigerators108
 TRCB™ Chef Base Refrigerators ~SPEC3 ...108

Merchandisers



110

CVM Contemporary Visual Merchandiser..114
 GDM® Swing Door Refrigerators116
 GDM® Freezers & Ice Merchandisers118
 GDM® Slide Door Refrigerators120
 GDM® Convenience Store Refrigerators....122
 GDM® Counter-Top Refrigerators.....122
 GEM Glass End Merchandisers.....124
 G4SM Four-Sided Glass Refrigerators.....124
 GDM® Floral Cases.....126
 G4SM Four-Sided Glass Floral Cases126
 GDM® Glass Door Wine Merchandiser128
 GDM® with Health Safety Timers.....130
 TVM® Visual Merchandiser Refrigerators ...132
 FLM™ Full Length Merchandiser134
 TOAM™ Open Air Merchandisers & TOAM™ with Glass Sides138
 TAC® Vertical Air Curtains & TAC® with Glass Sides.....140
 THAC™ Horizontal Air Curtains140

Retail Merchandisers



142

Medium Temperature144
 Low Temperature.....146

Display Merchandisers



148

TDM™-R Front-Access Refrigerated Display Merchandisers150

TDM™-DZ Front-Access Dual Zone Display Merchandisers152

TDM™-DC Front-Access Dry Display Merchandisers154

TGM™-R Fixed Glass Refrigerated Display Merchandisers156

TGM™-DZ Fixed Glass Dual Zone Display Merchandisers158

TGM™-DC Fixed Glass Dry Display Merchandisers160

TCGG™ Refrigerated Deli Cases.....162

Convertible Flex Merchandisers



164

Reach-In Convertible Merchandisers.....166

Glass Door Convertible Merchandisers.....166

Undercounter Convertible Merchandisers ..166

Milk Coolers




168

Single-Sided Milk Coolers170

Dual-Sided Milk Coolers.....170

Heated Cabinets



172

TH Series Heated Cabinets174

STR/STA/STG Roll-In Heated Cabinets176

STR/STA/STG Roll-Thru Heated Cabinets..178

Bar Refrigeration



180

TBR™ Reach-In, Black Exterior182

TBR™ Pass-Thru, Black Exterior182

TBR™ Reach-In, Stainless Exterior184

TBR™ Pass-Thru, Stainless Exterior184

TBB® Reach-In, Black & Stainless Exterior .186

TBB® Pass-Thru, Black & Stainless Exterior186

TBB®24 24" (610mm) Reach-In, Black & Stainless Exterior188

TDR™ Reach-In, Black Exterior.....190

TDR™ Pass-Thru, Black Exterior.....190

TDR™ Reach-In, Stainless Exterior.....192

TDR™ Pass-Thru, Stainless Exterior192

TDD™ Beer Dispensers, Black & Stainless Exterior194

TD™ Horizontal Bottle Coolers - Deep Well194

T-GC™ Glass & Plate Chillers/Frosters196

Can/Bottle/Barrel Capacities.....198

Keg Capacities.....200

TBR™/TDR™ Panel Ready Doors.....204

Commercial Ice Machine



206

Modular Cubed Ice Machine.....208

Sloped Front Storage Bins209

Table of Contents



| | |
|---|-----|
| Original Equipment Manufacturing Parts .. | 212 |
| Spec Series® Options | 213 |
| Shelving | 216 |
| Racks & Baskets | 218 |
| Flat Lids Options | 219 |
| Plexiglass Lid Options | 219 |
| Food & Pizza Prep Options | 220 |
| Shelf Kits | 220 |
| Castors, Legs & Stacking Collar | 222 |
| Cutting Boards | 224 |
| Controls & Displays | 226 |
| TRM® Options | 226 |
| Open Air & Air Curtain Accessories | 227 |
| Draft Options | 228 |
| Premier Bar | 229 |
| Commercial Ice | 231 |
| TDM™/TGM™ Options | 232 |
| Locks | 234 |
| Additional Accessories | 235 |



| | |
|-----------------------------|-----|
| Customization | 236 |
| Graphics Capabilities | 238 |



REACH-IN REFRIGERATION





T-SERIES[®]

BOTTOM MOUNT

The number one selling Reach-in cabinet, chosen by more restaurant owners than any other upright refrigerator. High-end refrigeration meets functionality with True's Reach-in refrigerators. These cabinets have a front-of-house look along with rugged construction for longevity in the busiest kitchens.






SPEC SERIES®

TOP MOUNT

With highly customizable interior and exterior options, Spec Series® are designed to meet the demands of the institutional and consultant market places such as high volume kitchens, schools and hotels.

SPEC SERIES® NOMENCLATURE

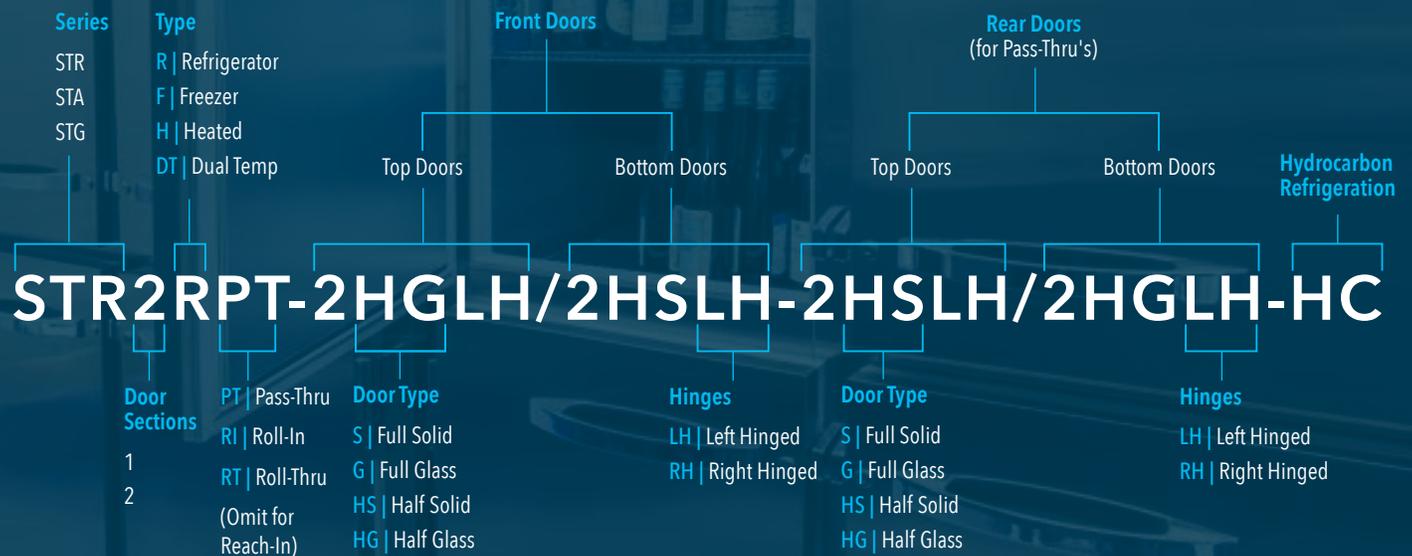

NOTE: Standard hinging is as follows:
STR/STA/STG1 - Right Hinged (RH)
STR/STA/STG2 - Left/Right Hinged (LH)



Bottom Mount Reach-Ins | T-Series® Refrigerators

REACH-IN & PASS-THRU REFRIGERATORS

Solid & Glass, Full & Half Door

Door locks standard

Entire cabinet structure and solid door are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP)

Lifetime guaranteed door handles

Digital control for state-of-the-art temperature precision. Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation. Refrigerators hold 33° to 38°F

natural refrigerant.

Bottom mount compressor unit performs better in kitchens with higher ambient temperatures and high grease areas

T-49-HC



T-23PT-HC



T-19G-HC-FGD01



T-49-4-HC



T-72-HC

Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Exterior - Stainless steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum with stainless steel floor.
- Positive seal self-closing doors with factory tested (over 1,000,000 times) lifetime guaranteed door hinges and torsion type closure system.
- Energy efficient, "Low-E", thermal insulated glass doors.
- Adjustable, heavy-duty, PVC-coated wire shelves.
- 4" (102mm) diameter castors standard (leg levelers standard for T-12-HC & T-12GHC~FGD01; 2.5" (64mm) diameter castors standard equipment for T-19-HC & T-19GHC~FGD01).
- Door locks standard (available on T-12-HC & T-12G-HC~FGD01).
- Exterior digital temperature display (not available on T-12-HC & T-12G-HC~FGD01).
- Legs available for most models.
- LED interior lighting. Safety shielded.
- Lifetime guaranteed recessed door handles on solid door models.
- Alternative hinge orientation available on most T-23/49/72 models. Contact factory for specifics.



T-SERIES® TRADITIONAL REACH-IN REFRIGERATORS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------------------|------------|--------------|------|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| T-11-HC | 1 | 3 | 1/10 | 1.6 | 190 (87) | 19 1/4 x 21 1/4 x 70 3/8 | 487 x 539 x 1786 |
| T-12-HC | 1 | 3 | 1/6 | 2.5 | 185 (84) | 24 7/8 x 23 1/8 x 63 3/8 | 632 x 588 x 1604 |
| T-19-HC | 1 | 3 | 1/10 | 1.5 | 245 (112) | 27 x 24 1/2 x 75 1/4 | 686 x 623 x 1912 |
| T-23-HC | 1 | 3 | 1/4 | 2.2 | 270 (123) | 27 x 29 1/2 x 78 3/8 | 686 x 750 x 1991 |
| T-35-HC | 2 | 6 | 1/3 | 5.6 | 365 (166) | 39 1/2 x 29 1/2 x 78 3/8 | 1004 x 750 x 1991 |
| T-43-HC | 2 | 6 | 1/2 | 5.4 | 370 (168) | 47 x 29 1/2 x 78 3/8 | 1194 x 750 x 1991 |
| T-49-HC | 2 | 6 | 1/2 | 5.4 | 450 (205) | 54 1/8 x 29 1/2 x 78 3/8 | 1375 x 750 x 1991 |
| T-72-HC | 3 | 9 | 3/4 | 6.9 | 575 (261) | 78 1/8 x 29 1/2 x 78 3/8 | 1985 x 750 x 1991 |
| GLASS DOORS | | | | | | | |
| T-11G-HC~TSL01 | 1 | 3 | 1/10 | 1.6 | 220 (100) | 19 1/4 x 21 3/8 x 70 3/8 | 487 x 541 x 1786 |
| T-11G-HC~FGD01 | 1 | 3 | 1/10 | 1.6 | 220 (100) | 19 1/4 x 21 1/4 x 70 3/8 | 487 x 539 x 1786 |
| T-12G-HC~FGD01 | 1 | 3 | 1/6 | 1.8 | 220 (100) | 24 7/8 x 23 3/4 x 63 | 632 x 591 x 1600 |
| T-19G-HC~FGD01 | 1 | 3 | 1/4 | 2.2 | 265 (121) | 27 x 24 1/2 x 75 1/4 | 686 x 623 x 1918 |
| T-23G-HC~FGD01 | 1 | 3 | 1/4 | 2.2 | 315 (143) | 27 x 29 1/8 x 78 3/8 | 686 x 759 x 1991 |
| T-35G-HC~FGD01 | 2 | 6 | 1/3 | 5.6 | 415 (189) | 39 1/8 x 29 1/8 x 78 3/8 | 1007 x 759 x 1991 |
| T-49G-HC~FGD01 | 2 | 6 | 1/2 | 5.4 | 465 (211) | 54 1/4 x 29 1/8 x 78 3/8 | 1378 x 759 x 1991 |
| T-72G-HC~FGD01 | 3 | 9 | 3/4 | 6.9 | 630 (286) | 78 1/8 x 29 1/8 x 78 3/8 | 1985 x 759 x 1991 |
| SOLID HALF DOORS | | | | | | | |
| T-23-2-HC | 2 | 3 | 1/4 | 2.2 | 275 (125) | 27 x 29 1/2 x 78 3/8 | 686 x 750 x 1991 |
| T-49-4-HC | 4 | 6 | 1/2 | 5.4 | 450 (205) | 54 1/8 x 29 1/2 x 78 3/8 | 1375 x 750 x 1991 |
| GLASS HALF DOORS | | | | | | | |
| T-23G-2-HC~FGD01 | 2 | 3 | 1/4 | 2.2 | 331 (151) | 27 x 29 3/4 x 78 3/8 | 686 x 754 x 1991 |
| T-49G-4-HC~FGD01 | 4 | 6 | 1/2 | 5.4 | 515 (234) | 54 1/8 x 29 3/4 x 78 3/8 | 1375 x 756 x 1991 |
| COMBINATION HALF DOORS | | | | | | | |
| T-23-1-G-1-HC~FGD01 | 2 | 3 | 1/4 | 2.2 | 311 (142) | 27 x 29 3/4 x 78 3/8 | 686 x 754 x 1991 |
| T-49-2-G-2-HC~FGD01 | 4 | 6 | 1/2 | 5.4 | 513 (233) | 54 1/8 x 29 3/4 x 78 3/8 | 1375 x 756 x 1991 |

† Depth does not include 1 5/8" (42 mm) for glass door handles or 1/2" (13 mm) for system mechanical components.

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs 3 1/4" (83mm) castor height for T-19-HC & T-19G-HC~FGD01.

* Height on T-12-HC & T-12G-HC~FGD01 does not include 1" (26mm) for upper door hinge.

note: T-12-HC & T-12G-HC~FGD01 standard with leg levelers, optional 2 1/2" (64mm) diameter castors and 6" (153mm) seismic legs available, 6" (153mm) legs not available.

T-SERIES® PASS-THRU

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D H* (in) | Cabinet Dimensions W D H* (mm) |
|---|------------|--------------|-----|------|-------------------------|--------------------------------|--------------------------------|
| PASS-THRU SOLID FRONT DOORS/SOLID REAR DOORS | | | | | | | |
| T-23PT-HC | 1 fr / 1bk | 3 | 1/4 | 2.2 | 325 (148) | 27 x 32 1/8 x 78 3/8 | 686 x 816 x 1991 |

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

Bottom Mount Reach-Ins | TSD Series Refrigerators

SLIDE DOOR REFRIGERATORS

Solid & Glass Slide Door



TSD-09G-HC-LD



TSD-33-HC



TSD-47G-HC-LD



TSD-69-HC

Features/Benefits

- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Exterior - Stainless steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum liner. Stainless steel floor with coved corners.
- Energy efficient, "Low-E", thermal insulated glass doors.
- Adjustable, heavy-duty, PVC-coated wire shelves.
- Legs standard on slide door models (except for TSD-09G-HC-LD which uses leg levelers).
- LED interior lighting. Safety shielded.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.



TSD SERIES SLIDE DOOR REFRIGERATORS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TSD-33-HC | 2 | 6 | ½ | 6.5 | 350 (159) | 39½ x 29¾ x 78¾ | 1004 x 753 x 1991 |
| TSD-47-HC | 2 | 6 | ½ | 8.5 | 410 (186) | 54½ x 29¾ x 78¾ | 1375 x 753 x 1991 |
| TSD-69-HC | 3 | 9 | ½ | 7.1 | 630 (286) | 78½ x 29¾ x 78¾ | 1985 x 753 x 1991 |
| GLASS DOORS | | | | | | | |
| TSD-09G-HC-LD | 2 | 3 | ¼ | 1.9 | 280 (127) | 36 x 21 x 35¾ | 913 x 532 x 911 |
| TSD-33G-HC-LD | 2 | 6 | ½ | 6.5 | 370 (168) | 39½ x 29¾ x 78¾ | 1004 x 753 x 1991 |
| TSD-47G-HC-LD | 2 | 6 | ½ | 8.5 | 440 (200) | 54½ x 29¾ x 78¾ | 1375 x 753 x 1991 |
| TSD-69G-HC-LD | 3 | 9 | ½ | 7.1 | 630 (286) | 78½ x 29¾ x 78¾ | 1985 x 753 x 1991 |

† Depth does not include ¾" (10 mm) for door handles (solid or glass), ⅞" (23 mm) for door handle on TSD-09G-HC-LD.

* Height does not include 6 ⅛" (156mm) for legs or 5" (127mm) for optional castors. (TSD-09G-HC-LD standard with leg levelers).

Bottom Mount Reach-Ins | TS Series Refrigerators

STAINLESS STEEL REFRIGERATORS

Solid & Glass, Full & Half Door



TS-23G-HC-FGD01



TS-23-2-HC



TS-49-HC



TS-72G-HC-FGD01

Features/Benefits

- True's "TS" series is the choice for the exclusive stainless steel commercial application. Designed with enduring quality that protects your long-term investment, and oversized refrigeration that guarantees exceptional food preservation.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Maintains 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Large evaporator and coil heater permit short defrost cycle on freezers.
- Energy efficient, thermal insulated glass doors.
- Lifetime guaranteed door hinges.
- Energy efficient, thermal insulated glass doors. Adjustable, heavy-duty, PVC-coated wire shelves.
- LED interior lighting. Safety shielded.
- Alternative hinge orientation available on most TS-23/49/72 models. Contact factory for specifics.
- A "no-stoop", lower shelf.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.



TS SERIES REACH-IN REFRIGERATORS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------------------|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TS-23-HC | 1 | 3 | ¼ | 2.2 | 285 (130) | 27 x 29½ x 78¾ | 686 x 750 x 1991 |
| TS-35-HC | 2 | 6 | ⅓ | 5.6 | 350 (159) | 39½ x 29½ x 78¾ | 1004 x 750 x 1991 |
| TS-43-HC | 2 | 6 | ½ | 5.4 | 380 (173) | 47 x 29½ x 78¾ | 1194 x 750 x 1991 |
| TS-49-HC | 2 | 6 | ½ | 5.4 | 400 (182) | 54½ x 29½ x 78¾ | 1375 x 750 x 1991 |
| TS-72-HC | 3 | 9 | ¾ | 6.9 | 615 (280) | 78½ x 29½ x 78¾ | 1985 x 750 x 1991 |
| GLASS DOORS | | | | | | | |
| TS-23G-HC~FGD01 | 1 | 3 | ¼ | 2.2 | 315 (143) | 27 x 29¾ x 78¾ | 686 x 756 x 1991 |
| TS-49G-HC~FGD01 | 2 | 6 | ½ | 5.4 | 533 (242) | 54¼ x 29¾ x 78¾ | 1378 x 759 x 1991 |
| TS-72G-HC~FGD01 | 3 | 9 | ¾ | 6.9 | 691 (314) | 78½ x 29¾ x 78¾ | 1378 x 759 x 1991 |
| SOLID HALF DOORS | | | | | | | |
| TS-23-2-HC | 2 | 3 | ¼ | 2.2 | 320 (146) | 27 x 29½ x 78¾ | 686 x 750 x 1991 |
| TS-49-4-HC | 4 | 6 | ½ | 5.4 | 400 (182) | 54½ x 29½ x 78¾ | 1375 x 750 x 1991 |
| GLASS HALF DOORS | | | | | | | |
| TS-23G-2-HC~FGD01 | 2 | 3 | ¼ | 2.2 | 330 (150) | 27 x 29¾ x 78¾ | 686 x 756 x 1991 |
| TS-49G-4-HC~FGD01 | 4 | 6 | ½ | 5.4 | 515 (234) | 54½ x 29¾ x 78¾ | 1375 x 756 x 1991 |
| COMBINATION HALF DOORS | | | | | | | |
| TS-23-1-G-1-HC~FGD01 | 2 | 3 | ¼ | 2.2 | 330 (150) | 27 x 29¾ x 78¾ | 686 x 756 x 1991 |
| TS-49-2-G-2-HC~FGD01 | 4 | 6 | ½ | 5.4 | 515 (233) | 54½ x 29¾ x 78¾ | 1375 x 756 x 1991 |


† Depth does not include 1⅝" (42 mm) for door handles (glass door models only).

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

Top Mount Reach-Ins | SPEC SERIES® Refrigerators

STR/STA/STG REFRIGERATORS

Solid & Glass, Full & Half Door

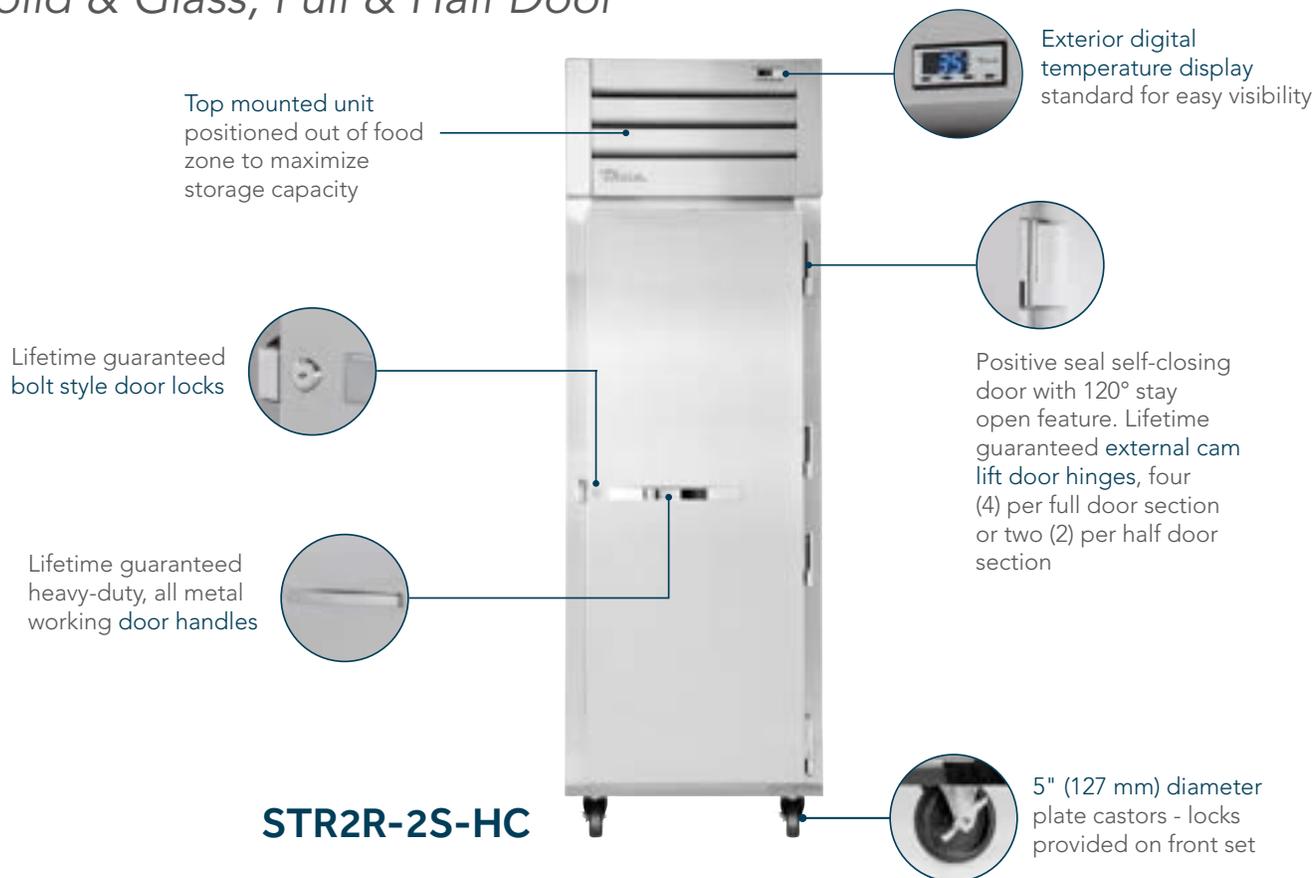

STA1R-1HG/1HS-HC



STR1R-2HS-HC



STR2R-2G-HC



STG2R-4G-HC

Features/Benefits

- Maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units. (optional on STA/STG units).
- LED interior lighting, safety shielded.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door models.
- Extruded, aluminum door frames on glass doors.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.



STR/STA/STG REACH-IN REFRIGERATORS

| Model | # of Doors | # of Shelves STA/STG models | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------------------|------------|--------------------------------|----|------|----------------------------|------------------------------------|------------------------------------|
| SOLID DOORS | | | | | | | |
| STR1R-1S-HC | 1 | 3 | ¼ | 3.8 | 430 (196) | 27½ x 33¾ x 77¾ | 699 x 858 x 1975 |
| STR2R-2S-HC | 2 | 6 | ½ | 5.9 | 650 (295) | 52½ x 33¾ x 77¾ | 1337 x 858 x 1975 |
| STR3R-3S-HC | 3 | 9 | ¾ | 6.1 | 770 (350) | 77¾ x 33¾ x 77¾ | 1975 x 858 x 1975 |
| SOLID HALF DOORS | | | | | | | |
| STR1R-2HS-HC | 2 | 3 | ¼ | 3.8 | 430 (196) | 27½ x 33¾ x 77¾ | 699 x 858 x 1975 |
| STR2R-4HS-HC | 4 | 6 | ½ | 5.9 | 730 (332) | 52½ x 33¾ x 77¾ | 1337 x 858 x 1975 |
| STR3R-6HS-HC | 6 | 9 | ¾ | 6.1 | 880 (400) | 77¾ x 33¾ x 77¾ | 1975 x 858 x 1975 |
| GLASS DOORS | | | | | | | |
| STR1R-1G-HC | 1 | 3 | ¼ | 3.8 | 480 (218) | 27½ x 33¾ x 77¾ | 699 x 858 x 1975 |
| STR2R-2G-HC | 2 | 6 | ½ | 5.9 | 795 (361) | 52½ x 33¾ x 77¾ | 1337 x 858 x 1975 |
| STR3R-3G-HC | 3 | 9 | ¾ | 6.1 | 867 (394) | 77¾ x 33¾ x 77¾ | 1975 x 858 x 1975 |
| GLASS HALF DOORS | | | | | | | |
| STR1R-2HG-HC | 2 | 3 | ¼ | 3.8 | 460 (209) | 27½ x 33¾ x 77¾ | 699 x 858 x 1975 |
| STR2R-4HG-HC | 4 | 6 | ½ | 5.9 | 730 (332) | 52½ x 33¾ x 77¾ | 1337 x 858 x 1975 |
| COMBINATION HALF DOORS | | | | | | | |
| STR1R-1HG/1HS-HC | 2 | 3 | ¼ | 3.8 | 450 (205) | 27½ x 33¾ x 77¾ | 699 x 858 x 1975 |
| STR2R-2HG/2HS-HC | 4 | 6 | ½ | 5.9 | 710 (322) | 52½ x 33¾ x 77¾ | 1337 x 858 x 1975 |

† Depth does not include 1½" (39 mm) for door handles.

* Height does not include 6⅞" (156mm) for castors or 6" (153mm) for optional legs

* Height does not include ¼" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

VLD VERTICAL LED LIGHTING MODELS

| Model |
|-------------------------|
| GLASS DOORS |
| STR1RVLD-1G-HC |
| STR2RVLD-2G-HC |
| STR3RVLD-3G |
| GLASS HALF DOORS |
| STR1RVLD-2HG-HC |
| STR2RVLD-4HG-HC |

note: Specifications are the same as standard models, just vertical LED Lighting added.

note: Only available on refrigerators.



Series Shelving

STR Series Shelving - (1) interior kit option included per full section at no charge.

(4) different interior kits available.

STA Series Shelving - (3) heavy-duty, chrome-plated wire shelves per section.

(4) different interior kits available.

STG Series Shelving - (3) heavy-duty, PVC-coated wire shelves per section.


(4) different interior kits available.

See "Spec Series accessories" (pg. 211) for additional details.

Top Mount Reach-Ins | SPEC SERIES® Refrigerators

STR/STA/STG PASS-THRU REFRIGERATORS

Solid & Glass, Full & Half Door

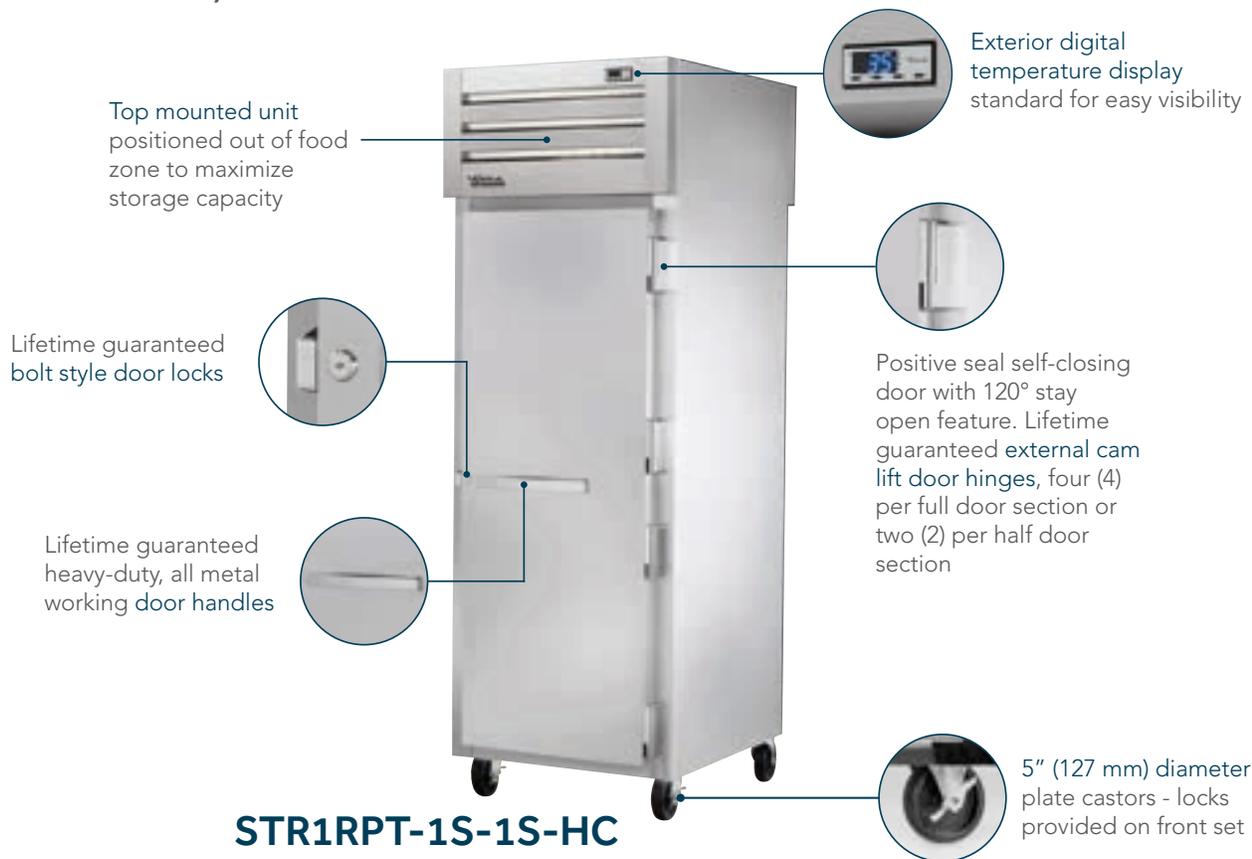

STG1RPT-2HG-1S-HC



STA1RPT-2HS-1S-HC



STA2PRT-4G-4HG-HC



STR2RRT-4HS-2S-HC

Features/Benefits

- Maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units. (optional on STA/STG units).
- LED interior lighting, safety shielded.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door models.
- Extruded, aluminum door frames on glass doors.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.



STR/STA/STG PASS-THRU REFRIGERATORS

| Model | # of Doors | # of Shelves STA/STG models | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* | Cabinet Dimensions W D† H* |
|--|-------------|--------------------------------|----|------|----------------------------|-------------------------------|-------------------------------|
| SOLID FRONT/SOLID REAR DOORS | | | | | | | |
| STR1RPT-1S-1S-HC | 1 fr / 1 bk | 3 | ¼ | 3.8 | 475 (216) | 27½x 36½x 77¾ | 699 x 918 x 1975 |
| STR2RPT-2S-2S-HC | 2 fr / 2 bk | 6 | ½ | 5.9 | 720 (327) | 52½x 36½x 77¾ | 1337 x 918 x 1975 |
| SOLID FRONT HALF DOORS/SOLID REAR DOORS | | | | | | | |
| STR1RPT-2HS-1S-HC | 2 fr / 1 bk | 3 | ¼ | 3.8 | 440 (200) | 27½x 36½x 77¾ | 699 x 918 x 1975 |
| STR2RPT-4HS-2S-HC | 4 fr / 2 bk | 6 | ½ | 5.9 | 745 (338) | 52½x 36½x 77¾ | 1337 x 918 x 1975 |
| GLASS FRONT/SOLID REAR DOORS | | | | | | | |
| STR1RPT-1G-1S-HC | 1 fr / 1 bk | 3 | ¼ | 3.8 | 475 (216) | 27½x 36½x 77¾ | 699 x 918 x 1975 |
| STR2RPT-2G-2S-HC | 2 fr / 2 bk | 6 | ½ | 5.9 | 720 (327) | 52½x 36½x 77¾ | 1337 x 918 x 1975 |
| GLASS FRONT HALF DOORS/SOLID REAR DOORS | | | | | | | |
| STR1RPT-2HG-1S-HC | 2 fr / 1 bk | 3 | ¼ | 3.8 | 520 (236) | 27½x 36½x 77¾ | 699 x 918 x 1975 |
| STR2RPT-4HG-2S-HC | 4 fr / 2 bk | 6 | ½ | 5.9 | 820 (372) | 52½x 36½x 77¾ | 1337 x 918 x 1975 |
| COMBINATION FRONT HALF DOORS/SOLID REAR DOORS | | | | | | | |
| STR1RPT-1HG/1HS-1S-HC | 2 fr / 1 bk | 3 | ¼ | 3.8 | 490 (223) | 27½x 36½x 77¾ | 699 x 918 x 1975 |
| STR2RPT-2HG/2HS-2S-HC | 4 fr / 2 bk | 6 | ½ | 5.9 | 720 (327) | 52½x 36½x 77¾ | 1337 x 918 x 1975 |
| SOLID FRONT/GLASS REAR DOORS | | | | | | | |
| STR1RPT-1S-1G-HC | 1 fr / 1 bk | 3 | ¼ | 3.8 | 475 (216) | 27½x 36½x 77¾ | 699 x 918 x 1975 |
| STR2RPT-2S-2G-HC | 2 fr / 2 bk | 6 | ½ | 5.9 | 720 (327) | 52½x 36½x 77¾ | 1337 x 918 x 1975 |
| SOLID FRONT HALF DOORS/GLASS REAR DOORS | | | | | | | |
| STR1RPT-2HS-1G-HC | 2 fr / 1 bk | 3 | ¼ | 3.8 | 440 (200) | 27½x 36½x 77¾ | 699 x 918 x 1975 |
| STR2RPT-4HS-2G-HC | 4 fr / 2 bk | 6 | ½ | 5.9 | 745 (338) | 52½x 36½x 77¾ | 1337 x 918 x 1975 |
| GLASS FRONT/GLASS REAR DOORS | | | | | | | |
| STR1RPT-1G-1G-HC | 1 fr / 1 bk | 3 | ¼ | 3.8 | 440 (200) | 27½x 36½x 77¾ | 699 x 918 x 1975 |
| STR2RPT-2G-2G-HC | 2 fr / 2 bk | 6 | ½ | 5.9 | 720 (327) | 52½x 36½x 77¾ | 1337 x 918 x 1975 |
| COMBINATION FRONT HALF DOORS/GLASS REAR DOORS | | | | | | | |
| STR1RPT-1HG/1HS-1G-HC | 2 fr / 1 bk | 3 | ¼ | 3.8 | 475 (216) | 27½x 36½x 77¾ | 699 x 918 x 1975 |
| STR2RPT-2HG/2HS-2S-HC | 4 fr / 2 bk | 6 | ½ | 5.9 | 775 (352) | 52½x 36½x 77¾ | 1337 x 918 x 1975 |
| GLASS FRONT HALF DOORS/GLASS REAR DOORS | | | | | | | |
| STR1RPT-2HG-1G-HC | 2 fr / 1 bk | 3 | ¼ | 3.8 | 440 (200) | 27½x 36½x 77¾ | 699 x 918 x 1975 |
| STR2RPT-4HG-2G-HC | 4 fr / 2 bk | 6 | ½ | 5.9 | 820 (372) | 52½x 36½x 77¾ | 1337 x 918 x 1975 |

† Depth does not include 1½" (39 mm) for door handles.

* Height does not include 6½" (156mm) for castors or 6" (153mm) for optional legs

* Height does not include ¼" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

VLD VERTICAL LED LIGHTING MODELS

| Model |
|-------------------------|
| GLASS DOORS |
| STR1RPTVLD-1G-HC |
| STR2RPTVLD-2G-HC |
| GLASS HALF DOORS |
| STR1RPTVLD-2HG-HC |
| STR2RPTVLD-4HG-HC |

note: Specifications are the same as standard models, just vertical LED Lighting added.

note: Only available on refrigerators.



Series Shelving

STR Series Shelving - (1) interior kit option included per full section at no charge.

(4) different interior kits available.

STA Series Shelving - (3) heavy-duty, chrome-plated wire shelves per section.

(4) different interior kits available.

STG Series Shelving - (3) heavy-duty, PVC-coated wire shelves per section.


(4) different interior kits available.

See "Spec Series accessories" (pg. 211) for additional details.

Top Mount Reach-Ins | SPEC SERIES® Refrigerators

STR/STA/STG ROLL-IN & ROLL-THRU REFRIGERATORS

Solid & Glass, Full Doors

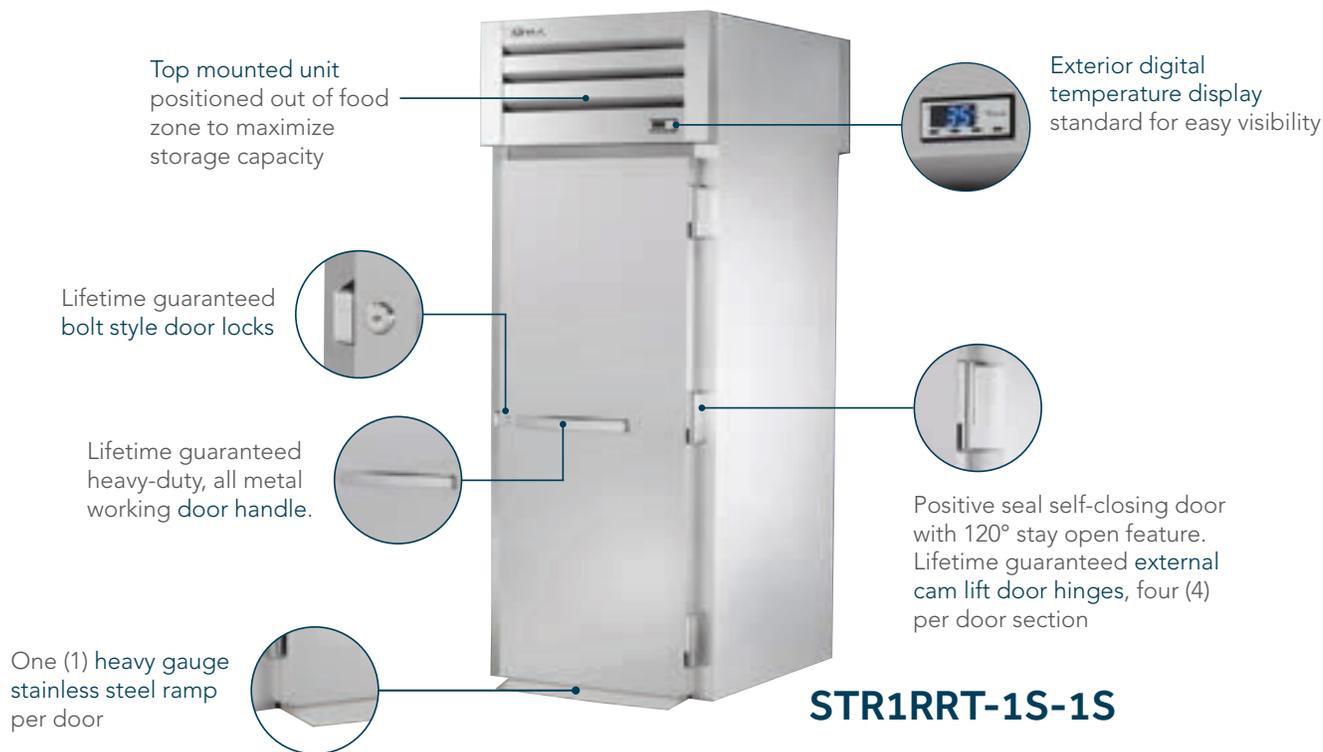

STR1RRI-1S



STR2RRI-2S



STG2RRT-2G-2S



STR2RRI89-1S

Features/Benefits

- Maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- Accepts roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 66"H (686mm x 737mm x 1677mm). STR/STA/STG1RRI89-1S and STR/STA/STG2RRI89-2S accept roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 72"H (686mm x 737mm x 1,829mm) (supplied by others).
- Factory engineered, self-contained, refrigeration system with capillary tube using environmentally-friendly (CFC free) 134A refrigerant.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Incandescent interior lighting.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door models.
- Extruded, aluminum door frames on glass doors.
- Self-contained system.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.



STR/STA/STG ROLL-IN REFRIGERATORS

| Model | # of Doors | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|----------------------------|------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | |
| STR1RRI-1S | 1 | 1/3 | 8.9 | 470 (214) | 35 x 34¾ x 83¾ | 889 x 883 x 2128 |
| STR2RRI-2S | 2 | 1/2 | 11.8 | 770 (350) | 68 x 34¾ x 83¾ | 1728 x 883 x 2128 |
| GLASS DOORS | | | | | | |
| STR1RRI-1G | 1 | 1/3 | 8.9 | 455 (207) | 35 x 34¾ x 83¾ | 889 x 883 x 2128 |
| STR2RRI-2G | 2 | 1/2 | 11.8 | 760 (345) | 68 x 34¾ x 83¾ | 1728 x 883 x 2128 |
| SOLID DOOR 89" HIGH | | | | | | |
| STR1RRI89-1S | 1 | 1/3 | 8.9 | 450 (205) | 35 x 34¾ x 88¾ | 889 x 883 x 2255 |
| STR2RRI89-2S | 2 | 1/2 | 11.8 | 805 (366) | 68 x 34¾ x 88¾ | 1728 x 883 x 2255 |

† Depth does not include 4¼" (108 mm) for ramp.

* Height does not include ¼" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

STR/STA/STG ROLL-THRU REFRIGERATORS

| Model | # of Doors | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|------------------------------------|-------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | |
| STR1RRT-1S-1S | 1 fr / 1 bk | 1/3 | 8.9 | 540 (245) | 35 x 37½ x 83¾ | 889 x 953 x 2128 |
| STR2RRT-2S-2S | 2fr / 2bk | 1/2 | 9.5 | 870 (395) | 68 x 37½ x 83¾ | 1728 x 953 x 2128 |
| GLASS FRONT/SOLID REAR DOOR | | | | | | |
| STR1RRT-1G-1S | 1 fr / 1 bk | 1/3 | 8.9 | 540 (245) | 35 x 37½ x 83¾ | 889 x 953 x 2128 |
| STR2RRT-2G-2S | 2fr / 2bk | 1/2 | 9.5 | 710 (323) | 68 x 37½ x 83¾ | 1728 x 953 x 2128 |
| SOLID DOOR 89" HIGH | | | | | | |
| STR1RRT89-1S-1S | 1 fr / 1 bk | 1/3 | 8.9 | 540 (245) | 35 x 37½ x 88¾ | 889 x 953 x 2255 |
| STR2RRT89-2S-2S | 2fr / 2bk | 1/2 | 9.5 | 760 (345) | 68 x 37½ x 88¾ | 1728 x 953 x 2255 |

† Depth does not include 4¼" (108 mm) for ramp.

* Height does not include ¼" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

Bottom Mount Reach-Ins | T-Series® Freezers

REACH-IN FREEZERS

Solid & Glass, Full & Half Door



T-23F-HC



T-12F-HC-FGD01



T-19FZ-HC



T-49F-4-HC



T-72F-HC

Features/Benefits

- -10°F (-23.3°C) product temperature (air off evaporator coil, -20°F (-28.9°C) holds frozen food and ice cream (T-19FZ-HC maintains 0°F (-18°C)).
- Exterior - Stainless steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum with stainless steel floor.
- Large evaporator and coil heater permit short defrost cycles.
- Automatic defrost system.
- Energy efficient, triple pane, thermal insulated glass doors.
- 4" (102mm) diameter castors standard (leg levelers standard for T-12-

- HC & T-12FG-HC~FGD01; 2.5" (64mm) diameter castors standard equipment for T-19F-HC & T-19FG-HC~FGD01).
- Lifetime guaranteed door hinges and torsion type closure system.
- 6" (153mm) Legs available for most models (6" (153mm) seismic legs only available on T-12F-HC & T-12FG-HC~FGD01).
- LED interior lighting. Safety shielded.
- Lifetime guaranteed recessed door handles on solid door models.
- Alternative hinge orientation available on most T-23F/49F/72F models. Contact factory for specifics.



T-SERIES® TRADITIONAL REACH-IN FREEZERS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|------------------------------|------------|--------------|-------|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| T-12F-HC | 1 | 3 | ½ | 4.5 | 170 (78) | 24⅞ x 23⅞ x 63⅞ | 632 x 588 x 1604 |
| T-19F-HC | 1 | 3 | ½ | 3.7 | 265 (120) | 27 x 24½ x 75¼ | 686 x 623 x 1912 |
| T-23F-HC | 1 | 3 | ½ | 3.7 | 295 (134) | 27 x 29½ x 78¾ | 686 x 750 x 1991 |
| T-35F-HC | 2 | 6 | 1 | 9.6 | 390 (177) | 39½ x 29½ x 78¾ | 1004 x 750 x 1991 |
| T-43F-HC | 2 | 6 | 1 | 9.6 | 410 (186) | 47 x 29½ x 78¾ | 1194 x 750 x 1991 |
| T-49F-HC | 2 | 6 | 1 | 9.6 | 480 (218) | 54⅞ x 29½ x 78¾ | 1375 x 750 x 1991 |
| T-72F-HC | 3 | 9 | ¾ | 14.0 | 650 (295) | 78⅞ x 29½ x 78¾ | 1985 x 750 x 1991 |
| 0° SOLID DOOR FREEZER | | | | | | | |
| T-19FZ-HC | 1 | 3 | ½ | 3.7 | 270 (123) | 27 x 24½ x 75¼ | 686 x 623 x 1912 |
| GLASS DOORS | | | | | | | |
| T-12FG-HC~FGD01 | 1 | 3 | ½ | 4.5 | 255 (116) | 24⅞ x 23¼ x 63 | 632 x 591 x 1600 |
| T-23FG-HC~FGD01 | 1 | 3 | ¾ | 6.2 | 330 (150) | 27 x 29⅞ x 78¾ | 686 x 759 x 1991 |
| T-49FG-HC~FGD01 | 2 | 6 | (2) ½ | 9.5 | 605 (275) | 54⅞ x 29¾ x 78¾ | 1375 x 756 x 1991 |
| T-72FG-HC~FGD01 | 3 | 9 | ¾ | 13.0 | 805 (366) | 78⅞ x 29¾ x 78¾ | 1985 x 756 x 1991 |
| SOLID HALF DOORS | | | | | | | |
| T-23F-2-HC | 2 | 3 | ½ | 3.7 | 300 (137) | 27 x 29½ x 78¾ | 686 x 750 x 1991 |
| T-49F-4-HC | 4 | 6 | 1 | 9.6 | 480 (218) | 54⅞ x 29½ x 78¾ | 1375 x 750 x 1991 |

† Depth does not include 1⅝" (42 mm) for glass door handles or ½" (13 mm) for system mechanical components.

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs (3¼" (83mm) castor height for T-19F-HC).

* Height on T-12F-HC & T-12FG-HC~FGD01 does not include 1" (26mm) for upper door hinge.

note: T-12F-HC & T-12FG-HC~FGD01 standard with leg levelers, optional 2½" (64mm) diameter castors and 6" (153mm) seismic legs available, 6" (153mm) legs not available.

Bottom Mount Reach-Ins | TS Series Freezers

STAINLESS STEEL FREEZERS

Solid & Glass, Full & Half Door



TS-49F-HC



TS-23F-HC



TS-23F-2-HC



TS-49FG-HC~FGD01



TS-72FG-HC~FGD01

Features/Benefits

- True's "TS" series is the choice for the exclusive stainless steel commercial application. Designed with enduring quality that protects your long-term investment, and oversized refrigeration that guarantees exceptional food preservation.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Maintains -10°F (-23.3°C) product temperatures.
- Large evaporator and coil heater permit short defrost cycle on freezers.
- Automatic defrost system.
- Energy efficient, triple pane, thermal insulated glass doors.
- Adjustable, heavy-duty, PVC-coated wire shelves.
- LED interior lighting. Safety shielded.
- Alternative hinge orientation available on most TS-23/49/72 models. Contact factory for specifics.
- A "no-stoop", lower shelf.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.



TS SERIES REACH-IN FREEZERS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------------|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TS-23F-HC | 1 | 3 | ½ | 3.7 | 310 (141) | 27 x 29½ x 78¾ | 686 x 750 x 1991 |
| TS-35F-HC | 2 | 6 | 1 | 9.6 | 455 (207) | 39½ x 29½ x 78¾ | 1004 x 750 x 1991 |
| TS-43F-HC | 2 | 6 | 1 | 9.6 | 410 (186) | 47 x 29½ x 78¾ | 1194 x 750 x 1991 |
| TS-49F-HC | 2 | 6 | 1 | 9.6 | 515 (234) | 54½ x 29½ x 78¾ | 1375 x 750 x 1991 |
| TS-72F-HC | 3 | 9 | ¾ | 14.0 | 650 (295) | 78½ x 29½ x 78¾ | 1985 x 750 x 1991 |
| GLASS DOORS | | | | | | | |
| TS-23FG-HC~FGD01 | 1 | 3 | ¾ | 6.2 | 330 (150) | 27 x 29¾ x 78¾ | 686 x 759 x 1991 |
| TS-49FG-HC~FGD01 | 2 | 6 | ½ | 11.0 | 605 (275) | 54½ x 29¾ x 78¾ | 1375 x 756 x 1991 |
| TS-72FG-HC~FGD01 | 3 | 9 | ¾ | 13.0 | 760 (345) | 78½ x 29¾ x 78¾ | 1985 x 756 x 1991 |
| SOLID HALF DOORS | | | | | | | |
| TS-23F-2-HC | 2 | 3 | ½ | 3.7 | 330 (150) | 27 x 29½ x 78¾ | 686 x 750 x 1991 |
| TS-49F-4-HC | 4 | 6 | 1 | 9.6 | 440 (200) | 54½ x 29½ x 78¾ | 1375 x 750 x 1991 |

† Depth does not include 1¾" (35 mm) for door handles (glass door models only).

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

note: TS-49F-HC, TS-72F-HC, TS-49FG-HC~FGD01, TS-72FG-HC~FGD01 completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 20 amp dedicated outlet.

Top Mount Reach-Ins | SPEC SERIES® Freezers

STR/STA/STG REACH-IN & PASS-THRU FREEZERS

Solid & Glass, Full & Half Door



STR1F-2HS-HC



STA1FPT-1S-1S-HC



STG2F-4HS-HC



STR3F-3S-HC

Features/Benefits

- Maintains cabinet -10°F (-23.3°C) temperatures. Ideal for both frozen foods and ice cream.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Automatic defrost system time-initiated, temperature-terminated. Saves energy consumption and provides shortest possible defrost cycle.
- Automatic evaporator fan motor delay during defrost cycle.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units. (optional on STA/STG units).
- LED interior lighting, safety shielded.
- Energy efficient, triple pane, thermal insulated glass doors.
- Extruded, aluminum door frames on glass doors.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.



STR/STA/STG REACH-IN FREEZERS

| Model | # of Doors | # of Shelves STA/STG models | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------------|------------|--------------------------------|-------|------|----------------------------|------------------------------------|------------------------------------|
| SOLID DOORS | | | | | | | |
| STR1F-1S-HC | 1 | 3 | ½ | 6.0 | 450 (205) | 27½ x 33¾ x 77¾ | 699 x 858 x 1975 |
| STR2F-2S-HC | 2 | 6 | 1¼ | 9.4 | 675 (307) | 52⅝ x 33¾ x 77¾ | 1337 x 858 x 1975 |
| STR3F-3S-HC | 3 | 9 | (2) ¾ | 13.8 | 980 (445) | 77¾ x 33¾ x 77¾ | 1975 x 858 x 1975 |
| SOLID HALF DOORS | | | | | | | |
| STR1F-2HS-HC | 2 | 3 | ½ | 6.0 | 410 (186) | 27½ x 33¾ x 77¾ | 699 x 858 x 1975 |
| STR2F-4HS-HC | 4 | 6 | 1¼ | 9.4 | 704 (320) | 52⅝ x 33¾ x 77¾ | 1337 x 858 x 1975 |
| STR3F-6HS-HC | 6 | 9 | (2) ½ | 13.8 | 936 (425) | 77¾ x 33¾ x 77¾ | 1975 x 858 x 1975 |
| GLASS DOORS | | | | | | | |
| STR1F-1G-HC | 1 | 3 | 1 | 8.9 | 520 (236) | 27½ x 33¾ x 77¾ | 699 x 858 x 1975 |
| GLASS HALF DOORS | | | | | | | |
| STR1F-2HG-HC | 2 | 3 | 1 | 8.9 | 410 (186) | 27½ x 33¾ x 77¾ | 699 x 858 x 1975 |

† Depth does not include 1½" (39 mm) for door handles.

* Height does not include 6⅞" (156mm) for castors or 6" (153mm) for optional legs

* Height does not include ¼" (7mm) for system mechanical components.

‡ Require 208-230/60Hz, single phase, NEMA 6-15R.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

STR/STA/STG PASS-THRU FREEZERS

| Model | # of Doors | # of Shelves STA/STG models | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------------|-------------|--------------------------------|----|------|----------------------------|------------------------------------|------------------------------------|
| SOLID DOORS | | | | | | | |
| STR1FPT-1S-1S | 1 fr / 1 bk | 3 | ¾ | 8.7 | 410 (186) | 27½ x 36⅞ x 77¾ | 699 x 918 x 1975 |
| SOLID HALF DOORS | | | | | | | |
| STR1FPT-2HS-2HS | 2 fr / 2 bk | 3 | ¾ | 8.7 | 410 (186) | 27½ x 36⅞ x 77¾ | 699 x 918 x 1975 |

† Depth does not include 1½" (39 mm) for door handles.

* Height does not include 6⅞" (156mm) for castors or 6" (153mm) for optional legs

* Height does not include ¼" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

Series Shelving

STR Series Shelving - (1) interior kit option included per full section at no charge.

(4) different interior kits available.

STA Series Shelving - (3) heavy-duty, chrome-plated wire shelves per section.

(4) different interior kits available.

STG Series Shelving - (3) heavy-duty, PVC-coated wire shelves per section.

(4) different interior kits available.

See "Spec Series accessories" (pg. 211) for additional details.

Top Mount Reach-Ins | SPEC SERIES® Freezers

STR/STA/STG ROLL-IN FREEZERS

Solid & Glass, Full Doors

Top mounted unit positioned out of food zone to maximize storage capacity

Lifetime guaranteed bolt style door locks

Lifetime guaranteed heavy-duty, all metal working door handles

Positive seal self-closing door with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, three (3) per full door section

Exterior digital temperature display standard for easy visibility

STR1FRI-1S

One (1) heavy gauge stainless steel ramp per door

STR2FRI-2S

Features/Benefits

- An ideal -10°F (-23.3°C) for roll-in racks supporting frozen food and ice cream.
- Accepts roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 66"H (686mm x 737mm x 1677mm). STR/STA/STG1RRI89-1S and STR/STA/STG2RRI89-2S accept roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 72"H (686mm x 737mm x 1,829mm) (supplied by others).
- Factory engineered, self-contained, refrigeration system with capillary tube using environmentally-friendly 404A refrigerant.
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Incandescent interior lighting.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.
- Automatic defrost system time-initiated, temperature-terminated.
- Automatic evaporator fan motor delay during defrost cycle.



STR/STA/STG ROLL-IN FREEZERS

| Model | # of Doors | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------|------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | |
| STR1FRI-1S | 1 | ¾ | 12.0 | 410 (186) | 35 x 34¾ x 83¾ | 889 x 883 x 2128 |
| STR2FRI-2S ‡ | 2 | 1½ | 8.0 | 770 (350) | 68 x 34¾ x 83¾ | 1728 x 883 x 2128 |

† Depth does not include 4¼" (108 mm) for ramp.

* Height does not include ¼" (7mm) for system mechanical components.

‡ Requires 115/208-230/60/1 Hz, single phase, 15 amp dedicated outlet.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

Bottom Mount Reach-Ins | DT - Dual Temperature

DT Series

Solid & Glass Full & Half Door Dual Temperature



T-23DT-G-HC-FGD01



T-49DT-HC



T-49DT-4-HC

Features/Benefits

- True's dual temperature models are equipped with two, independent, factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration systems.
- Refrigerator holds 33°F to 38°F (0.5°C to 3.3°C) temperature. Freezer holds -10°F (-23.3°C).
- Exterior - Stainless steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum with stainless steel floor.
- Adjustable, heavy-duty, PVC-coated wire shelves.
- LED interior lighting. Safety shielded.
- Lifetime guaranteed recessed door handles on solid door models.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door

- refrigerator models. Energy efficient, triple pane, thermal insulated glass doors on glass door freezer models.
- T23DT models feature refrigerator on top, freezer on bottom. T-49DT models feature refrigerator on left, freezer on right.
- T-49DT Freezer compartments feature standard backguard to improve airflow.
- Automatic defrost system.
- A "no-stoop", lower shelf.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.



DT SERIES DUAL TEMPERATURE REFRIGERATOR/FREEZERS

| Model | # of Doors | # of Shelves | HP Ref. | HP Frz. | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------------|------------|--------------|---------|---------|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | | |
| T-23DT-HC | 2 | 3 | 1/10 | 1/4 | 4.1 | 335 (152) | 27 1/8 x 29 7/8 x 78 3/8 | 687 x 757 x 1991 |
| T-49DT-HC | 2 | 6 | 1/4 | 1/2 | 6.4 | 510 (232) | 54 1/8 x 29 1/2 x 78 3/8 | 1375 x 750 x 1991 |
| SOLID HALF DOORS | | | | | | | | |
| T-49DT-4-HC | 4 | 6 | 1/4 | 1/2 | 6.4 | 510 (232) | 54 1/8 x 29 1/2 x 78 3/8 | 1375 x 750 x 1991 |
| GLASS DOORS | | | | | | | | |
| T-23DT-G-HC~FGD01 | 2 | 3 | 1/10 | 1/2 | 6.3 | 380 (173) | 27 x 29 3/4 x 78 3/8 | 686 x 756 x 1991 |


† Depth does not include 1 3/8" (35 mm) for door handle(T-23DT-G-HC~FGD01 only).

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

Top Mount Reach-Ins | SPEC SERIES® Dual Temperature

STR/STA/STG DUAL TEMPERATURE

Solid, Full & Half Doors

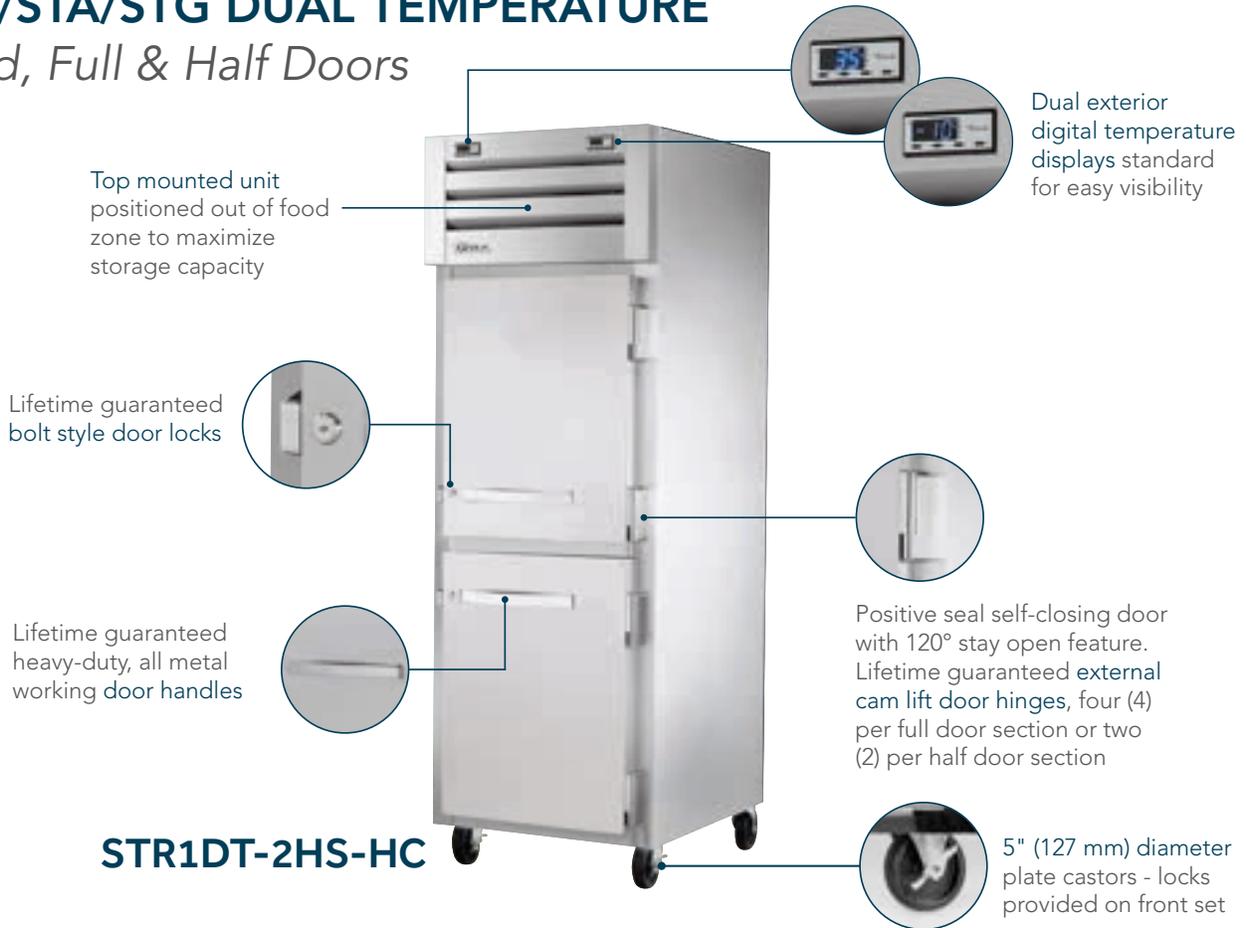

STR1DT-2HS-HC



STR1DTA-2HS-HC



STA2DT-2S



STA2DT-4HS

Features/Benefits

- Refrigerator section holds 33°F to 38°F (0.5°C to 3.3°C) temperature. Freezer section holds -10°F (-23.3°C).
- State-of-the-art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies, produce less heat and move a more consistent volume of air; all of these reduce energy consumption and provides greater motor reliability.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Automatic defrost system time-initiated, temperature-terminated. Saves energy consumption and provides shortest possible defrost cycle.
- Automatic evaporator fan motor delay during defrost cycle.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units. (optional on STA/STG units).
- LED interior lighting, safety shielded.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door refrigerator models.
- Energy efficient, triple pane, thermal insulated glass doors on glass door freezer models.
- Extruded, aluminum door frames on glass doors.
- STR - Stainless steel interior and exterior.
- STA - Exterior stainless steel. Interior is clear aluminum with stainless steel floor.
- STG - Exterior stainless steel door. Interior clear aluminum sides and back, stainless steel floor.
- Self-contained system.



STR/STA/STG DUAL TEMPERATURE REFRIGERATOR/FREEZERS

| Model | # of Doors | # of Shelves | HP Ref. | HP Frz. | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|------------------------------------|------------|--------------|---------|---------|------|-------------------------|---------------------------------|---------------------------------|
| SOLID FULL & HALF DOORS | | | | | | | | |
| STR1DT-2HS-HC | 2 | 3 | 1/10 | 1/4 | 3.7 | 500 (227) | 27 1/2 x 33 3/4 x 77 3/4 | 699 x 858 x 1975 |
| STR1DTA-2HS-HC | 2 | 3 | 1/10 | 1/4 | 3.7 | 420 (191) | 27 1/2 x 33 3/4 x 77 3/4 | 699 x 858 x 1975 |
| STR2DT-2S | 2 | 6 | 1/5 | 1/2 | 12.0 | 760 (345) | 52 5/8 x 33 3/4 x 77 3/4 | 1337 x 858 x 1975 |
| STR2DT-4HS | 4 | 6 | 1/5 | 1/2 | 11.6 | 665 (302) | 52 5/8 x 33 3/4 x 77 3/4 | 1337 x 858 x 1975 |

† Depth does not include 1 1/2" (39 mm) for door handles.

* Height does not include 6 1/8" (156mm) for castors or 6" (153mm) for optional legs

* Height does not include 1/4" (7mm) for system mechanical components.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

Series Shelving

STR Series Shelving - (1) interior kit option included per full section at no charge.

(4) different interior kits available.

STA Series Shelving - (3) heavy-duty, chrome-plated wire shelves per section.

(4) different interior kits available.

STG Series Shelving - (3) heavy-duty, PVC-coated wire shelves per section.

(4) different interior kits available.

See "Spec Series accessories" (pg. 211) for additional details.



FOOD PREP TABLES



True's food prep tables are designed with adaptability in mind. Each has flexible configurations that allow you to tailor your ingredient pans, helping reduce preparation time. True's exclusive airflow system locks in freshness while reducing energy costs by directing the coldest air off of the evaporator directly onto the food pans providing a uniform temperature throughout.






SANDWICH/SALAD UNITS

Solid Doors & Drawers


Stainless steel patented foam insulated cover keeps pans colder to lock in freshness & minimizes condensation



Extra Deep 11¾" (299mm) full length removable cutting boards



Optional Door and Drawer Configurations available in any section of cabinet



Swing Doors are self closing with 90° stay open feature



5" (127mm) diameter castors standard equipment (legs available)

TSSU-48-12-HC



TSSU-27-08-HC



TSSU-48-12D-4-HC



TSSU-60-16D-2-HC



TSSU-60-16-DS-ST-HC

Features/Benefits

- Maintains cold 33°F to 41°F (0.5°C to 5°C) product temperatures.
 - All stainless steel front, top and sides.
 - Corrosion resistant GalFan coated steel back.
 - Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
 - Recessed handles
 - Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered models).
 - Standard full set of (1/6 size) 6-7/8" L x 6-1/4" W x 4" D (175mm x 159mm x 102mm) NSF/ANSI approved, clear polycarbonate insert pans included (positioned in countertop). Also accommodates six and eight inch deep pans (drawered models will not accommodate 8" (204mm) deep condiment pans).
 - Available with optional 19" (483mm) white polyethylene or composite cutting board, crumb catcher or overshelf (19" (483mm) cutting boards exclude dual sided & drawered models).
 - ADA compliant models with 34" work surface height available.
 - All production of True models comply with NSF/ANSI standard 7.
- Dual Sided Models have...**
- Food prep access from both sides for high volume access along with the space efficiency of an island prep table.
 - Standard with 11¾" (299mm) white polyethylene cutting board.
- Drawer Models have...**
- Accommodate one 12" L x 20" W x 6" D (305mm x 508mm x 153mm) pan per drawer (drawer pans are not included). (48" (1,220mm) models accommodate one 12" L x 18" W x 6" D (305mm x 458mm x 153mm) food storage box or one 1/3 size and one 1/2 size pan per drawer; not included).
 - Door/drawer combination models require customer to designate door/drawer orientation.



TSSU® SANDWICH/SALAD UNITS

| Model | Door/Drawers | # of Shelves | # of Pans (Top) | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|-----------------|-----|------|-------------------------|--|---------------------------------|
| WITH DOORS | | | | | | | | |
| TSSU-27-08-HC | 1/0 | 2 | 8 | 1/5 | 3.5 | 225 (102) | 27 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 702 x 766 x 934 |
| TSSU-36-08-HC | 2/0 | 4 | 8 | 1/4 | 4.5 | 255 (116) | 36 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 924 x 766 x 934 |
| TSSU-48-08-HC | 2/0 | 4 | 8 | 1/5 | 5.8 | 295 (134) | 48 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1229 x 766 x 934 |
| TSSU-48-10-HC | 2/0 | 4 | 10 | 1/5 | 5.8 | 300 (136) | 48 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1229 x 766 x 934 |
| TSSU-48-12-HC | 2/0 | 4 | 12 | 1/5 | 5.8 | 340 (155) | 48 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1229 x 766 x 934 |
| TSSU-60-08-HC | 2/0 | 4 | 8 | 1/5 | 6.5 | 340 (155) | 60 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1534 x 766 x 934 |
| TSSU-60-10-HC | 2/0 | 4 | 10 | 1/5 | 6.5 | 365 (166) | 60 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1534 x 766 x 934 |
| TSSU-60-12-HC | 2/0 | 4 | 12 | 1/5 | 6.5 | 375 (171) | 60 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1534 x 766 x 934 |
| TSSU-60-16-HC | 2/0 | 4 | 16 | 1/5 | 6.5 | 360 (164) | 60 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1534 x 766 x 934 |
| TSSU-72-08-HC | 3/0 | 6 | 8 | 1/2 | 7.2 | 435 (198) | 72 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1839 x 766 x 934 |
| TSSU-72-10-HC | 3/0 | 6 | 10 | 1/2 | 7.2 | 435 (198) | 72 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1839 x 766 x 934 |
| TSSU-72-12-HC | 3/0 | 6 | 12 | 1/2 | 7.2 | 445 (202) | 72 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1839 x 766 x 934 |
| TSSU-72-16-HC | 3/0 | 6 | 16 | 1/2 | 7.2 | 440 (200) | 72 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1839 x 766 x 934 |
| TSSU-72-18-HC | 3/0 | 6 | 18 | 1/2 | 7.2 | 445 (202) | 72 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1839 x 766 x 934 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | | |
| TSSU-27-08D-2-HC | 0/2 | N/A | 8 | 1/5 | 3.5 | 240 (109) | 27 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 702 x 766 x 934 |
| TSSU-48-12D-2-HC | 1/2 | 2 | 12 | 1/5 | 5.8 | 340 (155) | 48 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1229 x 766 x 934 |
| TSSU-48-12D-4-HC | 0/4 | N/A | 12 | 1/5 | 5.8 | 340 (155) | 48 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1229 x 766 x 934 |
| TSSU-60-16D-2-HC | 1/2 | 2 | 16 | 1/5 | 6.5 | 405 (184) | 60 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1534 x 766 x 934 |
| TSSU-60-16D-4-HC | 0/4 | N/A | 16 | 1/5 | 6.5 | 420 (191) | 60 ³ / ₈ x 30 ¹ / ₈ x 36 ³ / ₄ | 1534 x 766 x 934 |
| DUAL SIDED WITH DOORS | | | | | | | | |
| TSSU-60-16-DS-ST-HC | 2/0 | 4 | 16 | 1/5 | 6.5 | 425 (193) | 60 ³ / ₈ x 38 ³ / ₄ x 31 ³ / ₈ | 1534 x 985 x 797 |

All models listed are available with optional crumb catcher.
 All models listed are available with optional 19" (483mm) cutting board (excludes drawered models).
 † Depth does not include 1" (26mm) for rear bumpers.
 * Height does not include 6¹/₄" (159mm) for castors or 6" (153mm) for optional legs. Height for all units are with the lid(s) closed.
 ** Width dimension does not include 1/8" (4mm) (each side) for lid pins, TSSU-27's only.
 note: Door/drawer combination cabinets require customer to designate door/drawer orientation.


TSSU® PAN DIVIDERS

| Model | Standard | Dimensions D x W (in) | Dimensions D x W (mm) |
|---|----------|---|-----------------------|
| PAN DIVIDERS FOR CONDIMENT PANS (top of cabinet) | | | |
| TSSU-27-08-HC | ✓ | 1 x 25 | 26 x 645 |
| TSSU-27-08-HC | | 7/8 x 25 | 23 x 645 |
| TSSU-27-08-HC | | 7/8 x 25 | 23 x 645 |
| TSSU Non-Mega | | 1 ⁵ / ₁₆ x 12 ⁵ / ₈ | 24 x 321 |
| TSSU Non-Mega | ✓ | 2 ⁷ / ₃₂ x 12 ⁵ / ₈ | 22 x 321 |
| TSSU Non-Mega | | 1 x 12 ⁵ / ₁₆ | 26 x 320 |

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



Pan Configuration

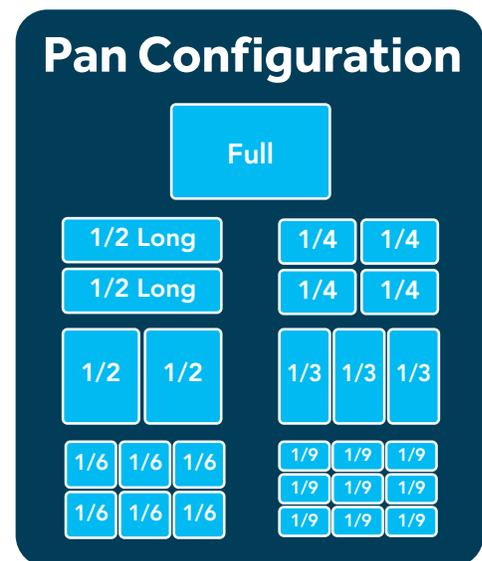

Incremental pan sizes designed to fit in full size pan opening in many different variations.



MEGA-TOP SANDWICH/SALAD UNITS

Solid Doors

Stainless steel patented foam insulated cover keeps pans colder to lock in freshness & minimizes condensation



8-7/8" (226mm) deep full length removable cutting board. Versatile, sanitary, white polyethylene cutting boards provide tough surface. Large comfortable working area



Swing Doors are self closing with 90° stay open feature



5" (127mm) diameter castors standard equipment (legs available)

TSSU-60-24M-B-ST-HC



TSSU-27-12M-B-HC



TSSU-36-12M-B-HC



TSSU-60-24M-B-DS-ST-HC



TSSU-72-30M-B-ST-FGLID-HC

Features/Benefits

- Maintains cold 33°F to 41°F (0.5°C to 5°C) product temperatures.
 - All stainless steel front, top and sides.
 - Corrosion resistant GalFan coated steel back.
 - Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
 - Recessed handles
 - Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered models).
 - Standard full set of (1/6 size) 6-7/8" L x 6-1/4" W x 4" D (175mm x 159mm x 102mm) NSF/ANSI approved, clear polycarbonate insert pans included (positioned in countertop). Also accommodates six and eight inch deep pans (drawered models will not accommodate 8" (204mm) deep condiment pans).
 - Available with optional 19" (483mm) white polyethylene or composite cutting board, crumb catcher or overshelf (19" (483mm) cutting boards exclude dual sided & drawered models).
 - Standard (1/6 size) 6-7/8" L x 6¼" W x 4" D (175mm x 159mm x 102mm) clear polycarbonate insert pans included. Also accommodates six and eight inch deep pans (except M-C model). (TSSU-27-12M-B-HC standard with nine 1/6 and three 1/9 size pans; TSSU-27-12M-C-HC standard with twelve 1/6 size pans); positioned in countertop.
 - ADA compliant models with 34" work surface height available.
 - All production of True models comply with NSF/ANSI standard 7.
- Dual Sided Models have...**
- Food prep access from both sides for high volume access along with the space efficiency of an island prep table.
 - Standard with 11¾" (299mm) white polyethylene cutting board.
- FGLID Models have...**
- Heavy-duty flat glass lid keeps pan temperatures colder and locks in freshness while enabling maximum product visibility.



TSSU® MEGA-TOP SANDWICH/SALAD UNITS

| Model | Door/Drawers | # of Shelves | # of Pans (Top) | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|----------------------------------|--------------|--------------|-----------------|-----|------|-------------------------|--|---------------------------------|
| WITH DOORS | | | | | | | | |
| TSSU-27-12M-B-HC | 1/0 | 2 | 12 | 1/5 | 3.5 | 225 (102) | 27 ⁵ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 702 x 867 x 1026 |
| TSSU-27-12M-C-HC | 1/0 | 2 | 12 | 1/5 | 3.5 | 225 (102) | 27 ⁵ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 702 x 867 x 1026 |
| TSSU-36-12M-B-HC | 2/0 | 4 | 12 | 1/4 | 4.5 | 255 (116) | 36 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 924 x 867 x 1026 |
| TSSU-48-12M-B-HC | 2/0 | 4 | 12 | 1/3 | 5.8 | 325 (148) | 48 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1229 x 867 x 1026 |
| TSSU-48-15M-B-HC | 2/0 | 4 | 15 | 1/3 | 5.8 | 320 (146) | 48 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1229 x 867 x 1026 |
| TSSU-48-18M-B-HC | 2/0 | 4 | 18 | 1/3 | 5.8 | 310 (141) | 48 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1229 x 867 x 1026 |
| TSSU-60-12M-B-HC | 2/0 | 4 | 12 | 1/3 | 6.5 | 370 (168) | 60 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1534 x 867 x 1026 |
| TSSU-60-15M-B-HC | 2/0 | 4 | 15 | 1/3 | 6.5 | 370 (168) | 60 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1534 x 867 x 1026 |
| TSSU-60-18M-B-HC | 2/0 | 4 | 18 | 1/3 | 6.5 | 385 (175) | 60 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1534 x 867 x 1026 |
| TSSU-60-24M-B-ST-HC | 2/0 | 4 | 24 | 1/3 | 6.5 | 385 (175) | 60 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1534 x 867 x 1026 |
| TSSU-72-12M-B-HC | 3/0 | 6 | 12 | 1/2 | 7.2 | 440 (200) | 72 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1839 x 867 x 1026 |
| TSSU-72-15M-B-HC | 3/0 | 6 | 15 | 1/2 | 7.2 | 445 (202) | 72 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1839 x 867 x 1026 |
| TSSU-72-18M-B-HC | 3/0 | 6 | 18 | 1/2 | 7.2 | 445 (202) | 72 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1839 x 867 x 1026 |
| TSSU-72-24M-B-ST-HC | 3/0 | 6 | 24 | 1/2 | 7.2 | 455 (207) | 72 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1839 x 867 x 1026 |
| TSSU-72-30M-B-ST-HC | 3/0 | 6 | 30 | 1/2 | 7.2 | 460 (209) | 72 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1839 x 867 x 1026 |
| DUAL SIDED WITH DOORS | | | | | | | | |
| TSSU-60-24M-B-DS-ST-HC | 2/0 | 4 | 24 | 1/3 | 6.5 | 420 (191) | 60 ³ / ₈ x 40 ³ / ₈ x 31 ³ / ₈ | 1534 x 1026 x 797 |
| TSSU-72-30M-B-DS-ST-HC | 3/0 | 6 | 30 | 1/2 | 7.2 | 490 (223) | 72 ³ / ₈ x 41 ⁷ / ₈ x 31 ³ / ₈ | 1839 x 1064 x 797 |
| FLAT GLASS LID WITH DOORS | | | | | | | | |
| TSSU-48-18M-B-FGLID-HC | 2/0 | 4 | 18 | 1/3 | 5.8 | 310 (141) | 48 ³ / ₈ x 34 ⁷ / ₈ x 31 ⁷ / ₈ | 1229 x 884 x 810 |
| TSSU-60-24M-B-ST-FGLID-HC | 2/0 | 4 | 24 | 1/3 | 6.5 | 385 (175) | 60 ³ / ₈ x 34 ⁷ / ₈ x 31 ⁷ / ₈ | 1534 x 884 x 810 |
| TSSU-72-30M-B-ST-FGLID-HC | 3/0 | 6 | 30 | 1/2 | 7.2 | 460 (209) | 72 ³ / ₈ x 34 ⁷ / ₈ x 31 ⁷ / ₈ | 1839 x 884 x 810 |

† Depth does not include 1" (26mm) for rear bumpers.

* Height does not include 6¹/₄" (159mm) for castors or 6" (153mm) for optional legs. Height for all units are with the lid(s) closed.

** Width dimension does not include 1/8" (4mm) (each side) for lid pins, TSSU-27's only.

note: M-B model standard with nine 1/6 and three 1/9 size pans.


TSSU® PAN DIVIDERS

| Model | Standard | Dimensions D x W (in) | Dimensions D x W (mm) |
|---|----------|--|-----------------------|
| PAN DIVIDERS FOR CONDIMENT PANS (top of cabinet) | | | |
| TSSU Mega | ✓ | 1 x 20 ¹ / ₁₆ | 26 x 519 |
| TSSU Mega | | 1 ⁵ / ₁₆ x 20 ¹ / ₁₆ | 24 x 519 |
| TSSU Mega | | 7 ⁸ / ₁₆ x 20 ¹ / ₁₆ | 23 x 519 |

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



Pan Configuration

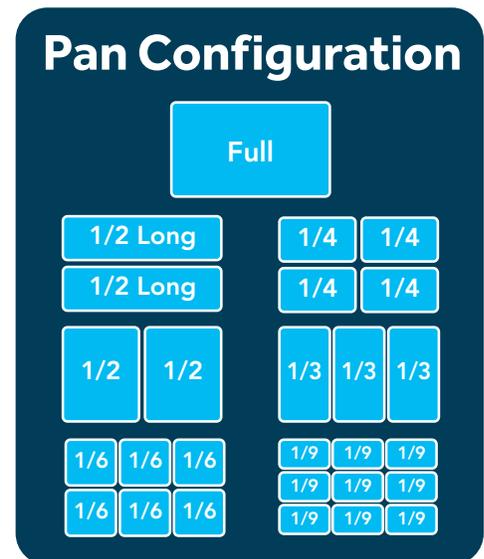


Incremental pan sizes designed to fit in full size pan opening in many different variations.


SANDWICH/SALAD UNITS ~SPEC3 SERIES

Solid Doors & Drawers

Stainless steel patented foam insulated cover keeps pans colder to lock in freshness & minimizes condensation




Extra deep 11¾" (299mm) full length removable cutting board on standard models. Versatile, sanitary, white polyethylene cutting boards provide tough surface. Large comfortable working area




Door and drawer locks standard



Exterior digital temperature control and display



Swing Doors are self closing with 90° stay open feature



Lifetime -guaranteed heavy duty all metal working spec door/drawer handles



5" (127mm) diameter castors standard equipment (legs available)

TSSU-48-12D-2-HC~SPEC3



TSSU-27-08D-2-HC~SPEC3



TSSU-36-08-HC~SPEC3



TSSU-60-16D-2-HC~SPEC3



TSSU-72-16-HC~SPEC3

Features/Benefits

- Maintains cold 33°F to 41°F (0.5°C to 5°C) product temperatures.
- All stainless steel front, countertop, sides and back.
- Corrosion resistant GalFan coated steel back.
- Interior features stainless steel liner and stainless steel floor with covered corners.
- Heavy-duty top and 20 gauge door and drawer fronts.
- Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered models).
- Available with optional white polyethylene or composite cutting board, crumb catcher or overshelf (19" (483mm) cutting boards exclude dual sided & drawered models).
- Heavy-duty stainless steel drawer slides and rollers are removable without tools for easy cleaning on drawer models.
- ADA compliant models with 34" (864mm) work surface height available.
- All production of True models comply with NSF/ANSI standard 7.

Dual Sided Models have...

- Food prep access from both sides for high volume access along with the space efficiency of an island prep table.
- Standard with 11¾" (299mm) white polyethylene cutting board.

Drawer Models have...

- Accommodate one 12" L x 20" W x 6" D (305mm x 508mm x 153mm) pan per drawer (drawer pans are not included). (48" (1,220mm) models accommodate one 12" L x 18" W x 6" D (305mm x 458mm x 153mm) food storage box or one 1/3 size and one 1/2 size pan per drawer; not included).
- Door/drawer combination models require customer to designate door/drawer orientation.

FGLID Models have...

- Heavy-duty flat glass lid keeps pan temperatures colder and locks in freshness while enabling maximum product visibility.



TSSU® SANDWICH/SALAD UNITS ~SPEC3 SERIES

| Model | Door/Drawers | # of Shelves | # of Pans (Top) | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|-----------------|----|------|-------------------------|---------------------------------|---------------------------------|
| WITH DOORS | | | | | | | | |
| TSSU-27-08-HC~SPEC3 | 1/0 | 2 | 8 | ½ | 3.5 | 215 (98) | 27¾ x 30½ x 36½ | 703 x 766 x 929 |
| TSSU-36-08-HC~SPEC3 | 2/0 | 4 | 8 | ¼ | 4.5 | 255 (116) | 36¾ x 30½ x 36¾ | 924 x 766 x 934 |
| TSSU-48-08-HC~SPEC3 | 2/0 | 4 | 8 | ½ | 5.8 | 295 (134) | 48¾ x 30½ x 36¾ | 1229 x 766 x 934 |
| TSSU-48-10-HC~SPEC3 | 2/0 | 4 | 10 | ½ | 5.8 | 300 (137) | 48¾ x 30½ x 36¾ | 1229 x 766 x 934 |
| TSSU-48-12-HC~SPEC3 | 2/0 | 4 | 12 | ½ | 5.8 | 290 (132) | 48¾ x 30½ x 36¾ | 1229 x 766 x 934 |
| TSSU-60-08-HC~SPEC3 | 2/0 | 4 | 8 | ½ | 6.5 | 340 (155) | 60¾ x 30½ x 36¾ | 1534 x 766 x 934 |
| TSSU-60-10-HC~SPEC3 | 2/0 | 4 | 10 | ½ | 6.5 | 365 (166) | 60¾ x 30½ x 36¾ | 1534 x 766 x 934 |
| TSSU-60-12-HC~SPEC3 | 2/0 | 4 | 12 | ½ | 6.5 | 375 (170) | 60¾ x 30½ x 36¾ | 1534 x 766 x 934 |
| TSSU-60-16-HC~SPEC3 | 2/0 | 4 | 16 | ½ | 6.5 | 375 (170) | 60¾ x 30½ x 36¾ | 1534 x 766 x 934 |
| TSSU-72-08-HC~SPEC3 | 3/0 | 6 | 8 | ½ | 7.2 | 435 (198) | 72¾ x 30½ x 36¾ | 1839 x 766 x 934 |
| TSSU-72-10-HC~SPEC3 | 3/0 | 6 | 10 | ½ | 7.2 | 435 (198) | 72¾ x 30½ x 36¾ | 1839 x 766 x 934 |
| TSSU-72-12-HC~SPEC3 | 3/0 | 6 | 12 | ½ | 7.2 | 445 (202) | 72¾ x 30½ x 36¾ | 1839 x 766 x 934 |
| TSSU-72-16-HC~SPEC3 | 3/0 | 6 | 16 | ½ | 7.2 | 445 (202) | 72¾ x 30½ x 36¾ | 1839 x 766 x 934 |
| TSSU-72-18-HC~SPEC3 | 3/0 | 6 | 18 | ½ | 7.2 | 445 (202) | 72¾ x 30½ x 36¾ | 1839 x 766 x 934 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | | |
| TSSU-27-08D-2-HC~SPEC3 | 0/2 | N/A | 8 | ½ | 3.5 | 240 (109) | 27¾ x 30½ x 36¾ | 702 x 766 x 934 |
| TSSU-48-12D-2-HC~SPEC3 | 1/2 | 2 | 12 | ½ | 5.8 | 325 (103) | 48¾ x 30½ x 36¾ | 1229 x 766 x 934 |
| TSSU-48-12D-4-HC~SPEC3 | 0/4 | N/A | 12 | ½ | 5.8 | 340 (155) | 48¾ x 30½ x 36¾ | 1229 x 766 x 934 |
| TSSU-60-16D-2-HC~SPEC3 | 1/2 | 2 | 16 | ½ | 6.5 | 405 (184) | 60¾ x 30½ x 36¾ | 1534 x 766 x 934 |
| TSSU-60-16D-4-HC~SPEC3 | 0/4 | N/A | 16 | ½ | 6.5 | 420 (191) | 60¾ x 30½ x 36¾ | 1534 x 766 x 934 |
| DUAL SIDED WITH DOORS | | | | | | | | |
| TSSU-60-16-DS-ST-HC~SPEC3 | 2/0 | 4 | 16 | ½ | 6.5 | 425 (193) | 60¾ x 38¾ x 31¾ | 1534 x 985 x 797 |

† Depth does not include 1" (26mm) for rear bumpers.

* Height does not include 6¼" (159mm) for castors or 6" (153mm) for optional legs. Height for all units are with the lid(s) closed.

** Width dimension does not include ½" (4mm) (each side) for lid pins, TSSU-27's only.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



MEGA-TOP SANDWICH/SALAD UNITS ~SPEC3 SERIES

Solid Doors & Drawers



TSSU-27-12M-C-HC-SPEC3



TSSU-36-12M-B-HC-SPEC3



TSSU-60-24M-B-DS-ST-HC-SPEC3



TSSU-60-24M-B-ST-FGLID-HC-SPEC3

Features/Benefits

- Maintains cold 33°F to 41°F (0.5°C to 5°C) product temperatures.
- All stainless steel front, countertop, sides and back.
- Corrosion resistant GalFan coated steel back.
- Interior features stainless steel liner and stainless steel floor with covered corners.
- Heavy-duty top and 20 gauge doors.
- Adjustable, heavy-duty, gray PVC-coated wire shelves
- ADA compliant models with 34" work surface height available.
- All production of True models comply with NSF/ANSI standard 7.

Dual Sided Models have...

- Food prep access from both sides for high volume access along with the space efficiency of an island prep table.
- 8-7/8" (226mm) deep full length removable white polyethylene cutting board.

FGLID Models have...

- Heavy-duty flat glass lid keeps pan temperatures colder and locks in freshness while enabling maximum product visibility.



TSSU® MEGA-TOP SANDWICH/SALAD UNITS ~SPEC3 SERIES

| Model | Door/Drawers | # of Shelves | # of Pans (Top) | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|----------------------------------|--------------|--------------|-----------------|-----|------|-------------------------|--|---------------------------------|
| WITH DOORS | | | | | | | | |
| TSSU-27-12M-B-HC~SPEC3 | 1/0 | 2 | 12 | 1/5 | 3.5 | 235 (107) | 27 ⁷ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 702 x 867 x 1026 |
| TSSU-27-12M-C-HC~SPEC3 | 1/0 | 2 | 12 | 1/5 | 3.5 | 225 (103) | 27 ⁷ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 702 x 867 x 1026 |
| TSSU-36-12M-B-HC~SPEC3 | 2/0 | 4 | 12 | 1/4 | 4.5 | 255 (116) | 36 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 924 x 867 x 1026 |
| TSSU-48-12M-B-HC~SPEC3 | 2/0 | 4 | 12 | 1/3 | 5.8 | 325 (148) | 48 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1229 x 867 x 1026 |
| TSSU-48-15M-B-HC~SPEC3 | 2/0 | 4 | 15 | 1/3 | 5.8 | 325 (148) | 48 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1229 x 867 x 1026 |
| TSSU-48-18M-B-HC~SPEC3 | 2/0 | 4 | 18 | 1/3 | 5.8 | 330 (150) | 48 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1229 x 867 x 1026 |
| TSSU-60-12M-B-HC~SPEC3 | 2/0 | 4 | 12 | 1/3 | 6.5 | 370 (168) | 60 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1534 x 867 x 1026 |
| TSSU-60-15M-B-HC~SPEC3 | 2/0 | 4 | 15 | 1/3 | 6.5 | TBD | 60 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1534 x 867 x 1026 |
| TSSU-60-18M-B-HC~SPEC3 | 2/0 | 4 | 18 | 1/3 | 6.5 | 385 (175) | 60 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1534 x 867 x 1026 |
| TSSU-60-24M-B-ST-HC~SPEC3 | 2/0 | 4 | 24 | 1/3 | 6.5 | 385 (175) | 60 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1534 x 867 x 1026 |
| TSSU-72-12M-B-HC~SPEC3 | 3/0 | 6 | 12 | 1/2 | 7.2 | TBD | 72 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1839 x 867 x 1026 |
| TSSU-72-15M-B-HC~SPEC3 | 3/0 | 6 | 15 | 1/2 | 7.2 | TBD | 72 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1839 x 867 x 1026 |
| TSSU-72-18M-B-HC~SPEC3 | 3/0 | 6 | 18 | 1/2 | 7.2 | TBD | 72 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1839 x 867 x 1026 |
| TSSU-72-24M-B-ST-HC~SPEC3 | 3/0 | 6 | 24 | 1/2 | 7.2 | 455 (207) | 72 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1839 x 867 x 1026 |
| TSSU-72-30M-B-ST-HC~SPEC3 | 3/0 | 6 | 30 | 1/2 | 7.2 | 460 (209) | 72 ³ / ₈ x 34 ¹ / ₈ x 40 ³ / ₈ | 1839 x 867 x 1026 |
| DUAL SIDED WITH DOORS | | | | | | | | |
| TSSU-60-24M-B-DS-ST-HC~SPEC3 | 2/0 | 4 | 24 | 1/3 | 6.5 | 420 (191) | 60 ³ / ₈ x 40 ³ / ₈ x 31 ³ / ₈ | 1534 x 1026 x 797 |
| TSSU-72-30M-B-DS-ST-HC~SPEC3 | 3/0 | 6 | 30 | 1/2 | 7.2 | 490 (223) | 72 ³ / ₈ x 41 ⁷ / ₈ x 31 ³ / ₈ | 1839 x 1064 x 797 |
| FLAT GLASS LID WITH DOORS | | | | | | | | |
| TSSU-48-18M-B-FGLID-HC~SPEC3 | 2/0 | 4 | 18 | 1/3 | 5.8 | 310 (141) | 48 ³ / ₈ x 34 ⁷ / ₈ x 31 ⁷ / ₈ | 1229 x 884 x 810 |
| TSSU-60-24M-B-ST-FGLID-HC~SPEC3 | 2/0 | 4 | 24 | 1/3 | 6.5 | 385 (175) | 60 ³ / ₈ x 34 ⁷ / ₈ x 31 ⁷ / ₈ | 1534 x 884 x 810 |
| TSSU-72-30M-B-ST-FGLID-HC~SPEC3 | 3/0 | 6 | 30 | 1/2 | 7.2 | 460 (209) | 72 ³ / ₈ x 34 ⁷ / ₈ x 31 ⁷ / ₈ | 1839 x 884 x 810 |

† Depth does not include 1" (26mm) for rear bumpers.

* Height does not include 6¹/₄" (159mm) for castors or 6" (153mm) for optional legs. Height for all units are with the lid(s) closed.

** Width dimension does not include 1/8" (4mm) (each side) for lid pins, TSSU-27's only.

note: M-B model standard with nine 1/6 and three 1/9 size pans.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



AMERICAN DISABILITY ACT (ADA) COMPLIANT PACKAGES

Solid Doors & Drawers



ADA models feature 3" (77mm) diameter castors




TSSU-48-12-HC

Features/Benefits

- True sandwich/salad units are designed to accommodate American Disabilities Act (ADA) requirements.
- ADA Compliant models have 3" (127mm) castors
- ADA Compliant models have 34" (864mm) counter heights.


True Sandwich/Salad Units Are Designed To Accommodate American Disabilities Act (ADA) Requirements.

PLAN VIEW COMPARISON

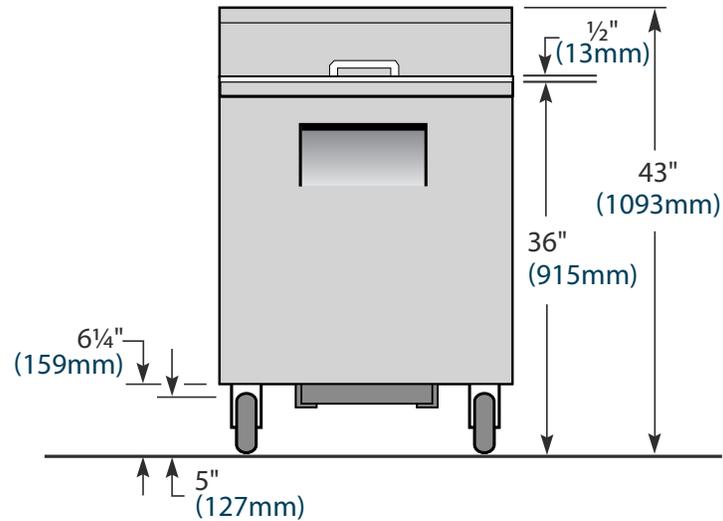

Standard

36" (915mm) Height

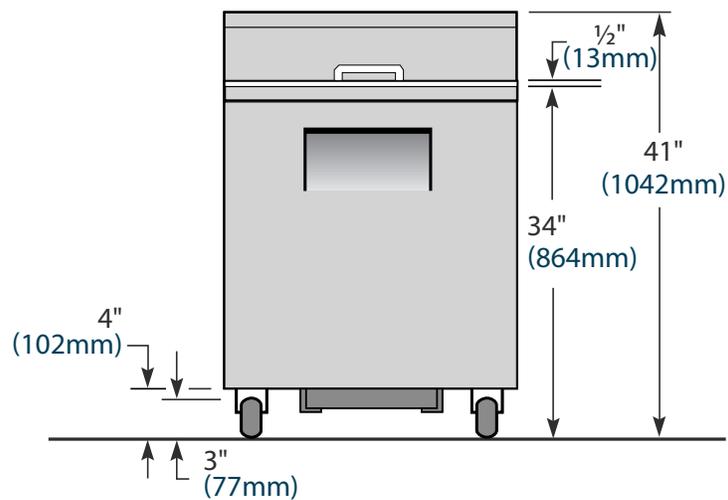


ADA Compliant

34" (864mm) Height

FOOD PREP UNITS & FOOD PREP UNITS ~SPEC3 SERIES

Solid Doors & Drawers

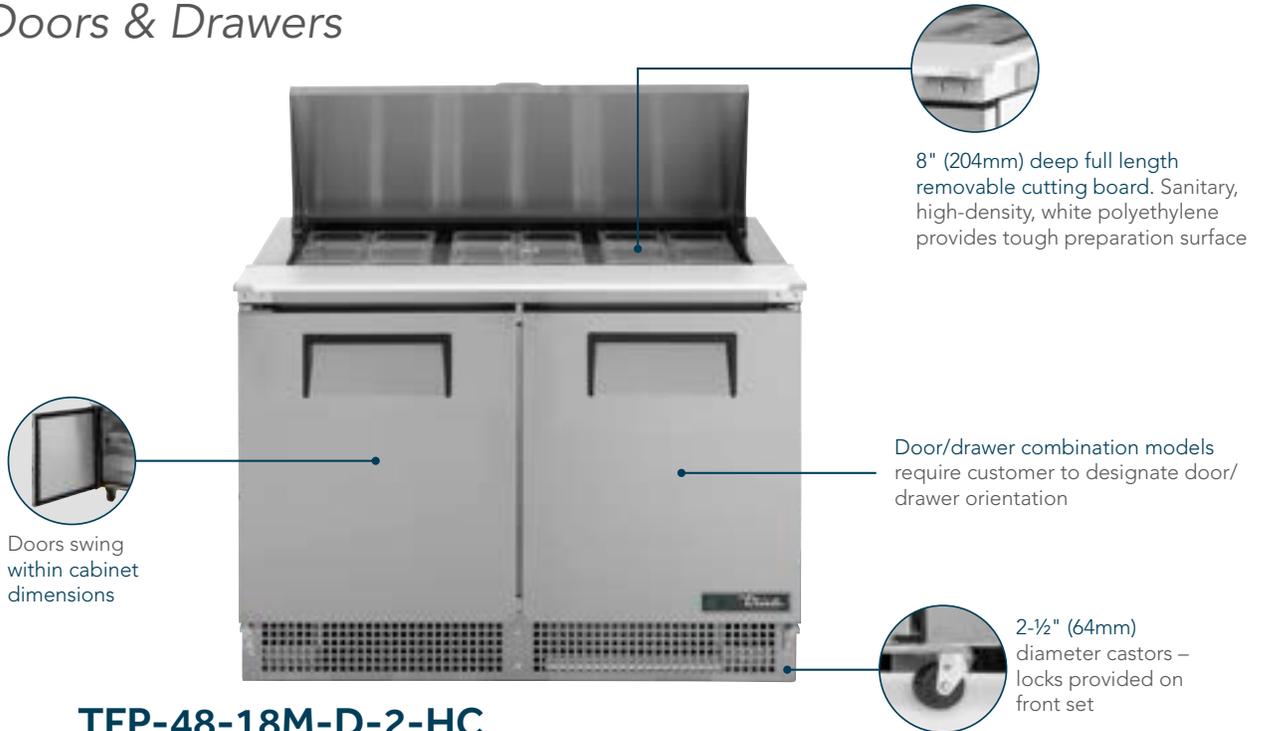

TFP-48-18M-D-2-HC



TFP-32-12M-HC



TFP-64-24M-FGLID-HC



TFP-72-30M-D-4-HC



TFP-72-30M-HC-SPEC3

Features/Benefits

- Maintains cold 33°F to 41°F (0.5°C to 5°C) product temperatures.
- Oversized and balanced (134A), refrigeration system, with guided airflow directed to provide uniform temperature in food pans and cabinet interior.
- All stainless steel front, top and sides.
- Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
- Recessed handles
- Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered sections).
- TFP-32-12M-D-2 & TFP-64-24M-D-4 Each drawer accommodates two (2) full size 12" L x 20" W x 6" D (305 mm x 508 mm x 153 mm) food pan (sold separately). Drawer will support varying size pan configurations with available pan divider bars (drawer pans sold separately).
- TFP-48-18M-D-4 & TFP-72-30M-D-6 Each drawer accommodates one (1) full size 12" L x 20" W x 6" D (305 mm x 508 mm x 153 mm) food pan & three (3) 1/9 size or six (6) 1/6 size & three (3) 1/9 size pans per drawer

- (sold separately). Drawer will support varying size pan configurations with available pan divider bars (drawer pans sold separately).
- Self-contained system.
- Front breathing.
- Work surface 36" (915mm) high.
- NSF/ANSI standard 7 compliant for open food product.
- Available with optional single and double over shelves. Consult factory for model specific availability.

~SPEC3 Models have...

- All stainless steel front, countertop, sides, and back.
- Interior features stainless steel liner and stainless steel floor with coved corners.
- Heavy-duty top and 20 gauge door and drawer fronts.
- Lifetime-guaranteed heavy duty all metal working spec door/drawer handles.
- Door and drawer locks standard.
- Exterior digital temperature control and display.



TFP® FOOD PREP UNITS

| Model | Door/Drawers | # of Shelves | # of Pans (Top) | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|-----------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| WITH DOORS | | | | | | | | |
| TFP-32-12M-HC | 1/0 | 2 | 12 | 1/5 | 3.3 | 315 (143) | 32 1/8 x 31 1/2 x 45 3/4 | 816 x 801 x 1162 |
| TFP-48-18M-HC | 2/0 | 4 | 18 | 1/5 | 2.9 | 380 (173) | 48 1/8 x 31 1/2 x 45 3/4 | 1223 x 801 x 1162 |
| TFP-64-24M-HC | 2/0 | 4 | 24 | 1/2 | 7.6 | 570 (259) | 64 1/8 x 31 1/2 x 45 3/4 | 1629 x 801 x 1162 |
| TFP-72-30M-HC | 3/0 | 6 | 30 | 1/2 | 8.1 | 530 (241) | 72 1/8 x 31 1/2 x 45 3/4 | 1832 x 801 x 1162 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | | |
| TFP-32-12M-D-2-HC | 0/2 | N/A | 12 | 1/5 | 3.3 | 315 (143) | 32 1/8 x 31 1/2 x 45 3/4 | 816 x 801 x 1162 |
| TFP-48-18M-D-2-HC | 1/2 | 2 | 18 | 1/5 | 2.9 | 480 (218) | 48 1/8 x 31 1/2 x 45 3/4 | 1223 x 801 x 1162 |
| TFP-48-18M-D-4-HC | 0/4 | N/A | 18 | 1/5 | 2.9 | 480 (218) | 48 1/8 x 31 1/2 x 45 3/4 | 1223 x 801 x 1162 |
| TFP-64-24M-D-2-HC | 1/2 | 2 | 24 | 1/2 | 7.6 | 570 (259) | 64 1/8 x 31 1/2 x 45 3/4 | 1629 x 801 x 1162 |
| TFP-64-24M-D-4-HC | 0/4 | N/A | 24 | 1/2 | 7.6 | 570 (259) | 64 1/8 x 31 1/2 x 45 3/4 | 1629 x 801 x 1162 |
| TFP-72-30M-D-2-HC | 2/2 | 4 | 30 | 1/2 | 8.1 | 635 (289) | 72 1/8 x 31 1/2 x 45 3/4 | 1832 x 801 x 1162 |
| TFP-72-30M-D-4-HC | 1/4 | 2 | 30 | 1/2 | 8.1 | 635 (289) | 72 1/8 x 31 1/2 x 45 3/4 | 1832 x 801 x 1162 |
| TFP-72-30M-D-6-HC | 0/6 | N/A | 30 | 1/2 | 8.1 | 635 (289) | 72 1/8 x 31 1/2 x 45 3/4 | 1832 x 801 x 1162 |
| FLAT GLASS LID WITH DOORS | | | | | | | | |
| TFP-48-18M-FGLID-HC | 2/0 | 4 | 18 | 1/5 | 2.9 | 380 (173) | 48 1/8 x 32 1/4 x 37 1/4 | 1223 x 820 x 946 |
| TFP-64-24M-FGLID-HC | 2/0 | 4 | 24 | 1/2 | 7.6 | 570 (259) | 64 1/8 x 32 1/4 x 37 1/4 | 1629 x 820 x 946 |
| TFP-72-30M-FGLID-HC | 3/0 | 6 | 30 | 1/2 | 8.1 | 530 (240) | 72 1/8 x 32 1/4 x 37 1/4 | 1832 x 820 x 946 |

† Depth does not include 2" (51mm) for cutting board.

* Height does not include 3/4" (19mm) for castors. Height for all units are with the lid(s) closed.

* Height on FGLID models does not include 21 5/8" (550mm) for open lid. Total height with castors and lid open is 59 5/8" (1515mm).

TFP® FOOD PREP UNITS ~SPEC3 SERIES

| Model | Door/Drawers | # of Shelves | # of Pans (Top) | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|-----------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| WITH DOORS | | | | | | | | |
| TFP-32-12M-HC~SPEC3 | 1/0 | 2 | 12 | 1/5 | 3.3 | 315 (143) | 32 1/8 x 31 1/2 x 45 3/4 | 816 x 801 x 1162 |
| TFP-48-18M-HC~SPEC3 | 2/0 | 4 | 18 | 1/5 | 2.9 | 375 (171) | 48 1/8 x 31 1/2 x 45 3/4 | 1223 x 801 x 1162 |
| TFP-64-24M-HC~SPEC3 | 2/0 | 4 | 24 | 1/2 | 7.6 | 570 (259) | 64 1/8 x 31 1/2 x 45 3/4 | 1629 x 801 x 1162 |
| TFP-72-30M-HC~SPEC3 | 3/0 | 6 | 30 | 1/2 | 8.1 | 530 (241) | 72 1/8 x 31 1/2 x 45 3/4 | 1832 x 801 x 1162 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | | |
| TFP-32-12M-D-2-HC~SPEC3 | 0/2 | N/A | 12 | 1/5 | 3.3 | 325 (148) | 32 1/8 x 31 1/2 x 45 3/4 | 816 x 801 x 1162 |
| TFP-48-18M-D-4-HC~SPEC3 | 0/4 | N/A | 18 | 1/5 | 2.9 | 480 (218) | 48 1/8 x 31 1/2 x 45 3/4 | 1223 x 801 x 1162 |
| TFP-64-24M-D-4-HC~SPEC3 | 0/4 | N/A | 24 | 1/2 | 7.6 | 570 (259) | 64 1/8 x 31 1/2 x 45 3/4 | 1629 x 801 x 1162 |
| TFP-72-30M-D-6-HC~SPEC3 | 0/6 | N/A | 30 | 1/2 | 8.1 | 530 (241) | 72 1/8 x 31 1/2 x 45 3/4 | 1832 x 801 x 1162 |
| FLAT GLASS LID WITH DOORS | | | | | | | | |
| TFP-48-18M-FGLID-HC~SPEC3 | 2/0 | 4 | 18 | 1/5 | 2.9 | 480 (218) | 48 1/8 x 32 1/4 x 37 1/4 | 1223 x 820 x 946 |
| TFP-64-24M-FGLID-HC~SPEC3 | 2/0 | 4 | 24 | 1/2 | 7.6 | 570 (259) | 64 1/8 x 32 1/4 x 37 1/4 | 1629 x 820 x 946 |
| TFP-72-30M-FGLID-HC~SPEC3 | 3/0 | 6 | 30 | 1/2 | 8.1 | 530 (241) | 72 1/8 x 32 1/4 x 37 1/4 | 1832 x 820 x 946 |

† Depth does not include 2" (51mm) for cutting board.

* Height does not include 3/4" (19mm) for castors. Height for all units are with the lid(s) closed.

* Height on FGLID models does not include 21 5/8" (550mm) for open lid. Total height with castors and lid open is 59 5/8" (1515mm).


True has 3 different widths of spacer bars to accommodate the needs of the end user: Because plastic and stainless pan manufacturers have different dimensions, widths and sizes, our spacer bars will allow the end user to design almost any pan configuration. See accessory section for pan sizes and configuration.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



PIZZA PREP TABLES & PIZZA PREP TABLES ~SPEC3 SERIES

Solid Doors & Drawers

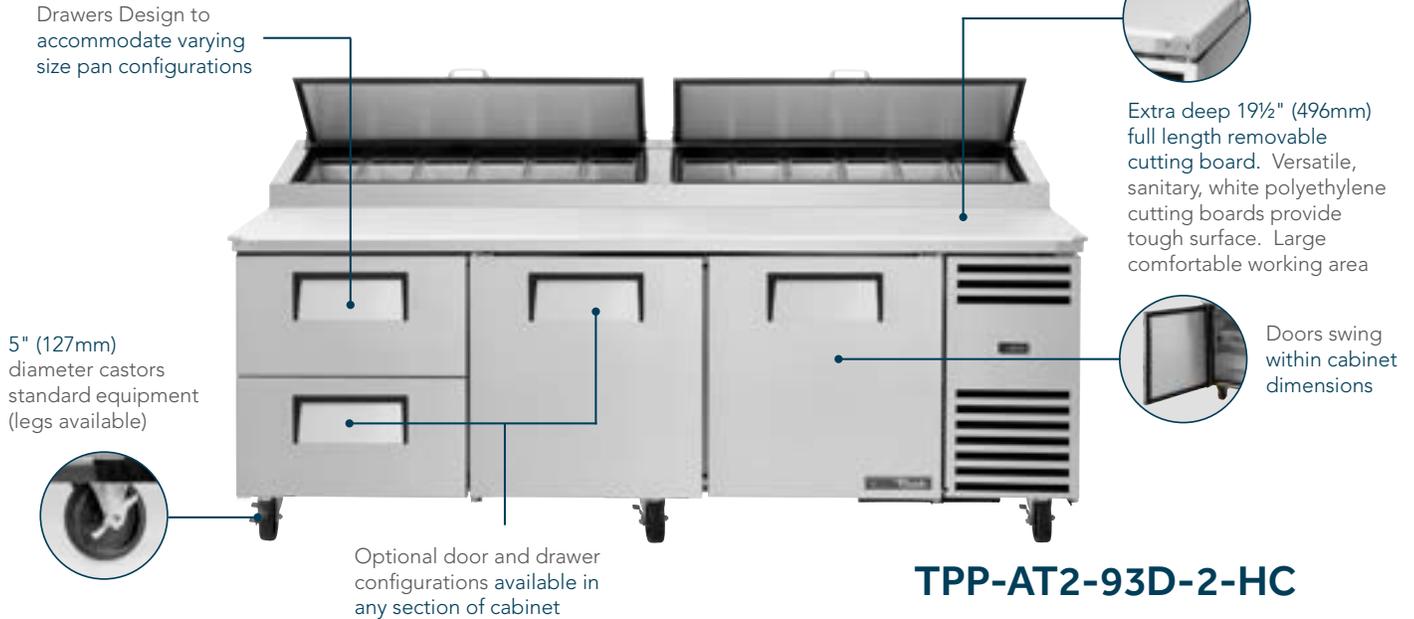

TPP-AT-44-HC



TPP-AT-60-HC



TPP-67D-4-HC-SPEC3



TPP-119-HC-SPEC3

Features/Benefits

- Maintains cold 33°F to 41°F (0.5°C to 5°C) product temperatures.
 - All stainless steel front, top and ends.
 - Corrosion resistant GalFan coated steel back.
 - Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
 - Recessed handles
 - Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered sections).
 - Standard full set of (1/3 size) 12-3/4" L x 6-1/4" W x 6" D (324mm x 159mm x 153mm) NSF approved, clear polycarbonate insert pans included in condiment rail.
 - Drawered models (drawered section only) will accommodate up to two 8" (204mm) deep full size pans (12" L x 20" W x 8" D (305mm x 508mm x 204mm)) per drawer. (pans not included).
 - Door models accommodate half bun tray rack; applies to only one door of TPP-60-AT-HC (18" (458mm) x 26" (661mm) sheet pan) - not included.
 - Self-contained system.
 - Front breathing.
 - Work surface 36" (915mm) high.
 - Rear bumpers.
 - NSF/ANSI standard 7 compliant for open food product.
 - Garnish rack and service shelf optional (service shelf is not available on TPP-119-AT's).
- ~SPEC3 Models have...**
- All stainless steel front, countertop, sides, and back.
 - Interior features stainless steel liner and stainless steel floor with coved corners.
 - Heavy-duty top and 20 gauge door and drawer fronts.
 - Lifetime-guaranteed heavy duty all metal working spec door/drawer handles.
 - Door and drawer locks standard.
 - Exterior digital temperature control and display.
- True has 3 different widths of spacer bars to accommodate the needs of the end user:

Because plastic and stainless pan manufacturers have different dimensions, widths and sizes, our spacer bars will allow the end user to design almost any pan configuration. See accessory section for pan sizes and configuration.



TPP® PIZZA PREP TABLES

| Model | Door/Drawers | # of Shelves | # of Pans (Top) | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|-----------------|----|------|-------------------------|---------------------------------|---------------------------------|
| WITH DOORS | | | | | | | | |
| TPP-AT-44-HC | 1/0 | 2 | 6 | ¼ | 3.9 | 330 (150) | 44½ x 33¾ x 38¾ | 1133 x 854 x 987 |
| TPP-AT-60-HC | 2/0 | 4 | 8 | ¼ | 3.9 | 410 (186) | 60¼ x 33¾ x 38¾ | 1530 x 854 x 987 |
| TPP-AT-67-HC | 2/0 | 4 | 9 | ¼ | 3.9 | 455 (207) | 67¾ x 33¾ x 38¾ | 1711 x 854 x 987 |
| TPP-AT2-93-HC | 3/0 | 6 | 12 | ¾ | 7.1 | 600 (273) | 93¾ x 33¾ x 38¾ | 2372 x 854 x 987 |
| TPP-AT-119-HC | 4/0 | 8 | 15 | ¾ | 7.1 | 975 (443) | 119¼ x 33¾ x 38¾ | 3029 x 854 x 987 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | | |
| TPP-AT-44D-2-HC | 0/2 | N/A | 6 | ¼ | 3.9 | 330 (150) | 44½ x 33¾ x 38¾ | 1133 x 854 x 987 |
| TPP-AT-60D-2-HC | 1/2 | 2 | 8 | ¼ | 3.9 | 415 (189) | 60¼ x 33¾ x 38¾ | 1530 x 854 x 987 |
| TPP-AT-67D-2-HC | 1/2 | N/A | 9 | ¼ | 3.9 | 455 (207) | 67¾ x 33¾ x 38¾ | 1711 x 854 x 987 |
| TPP-AT-67D-4-HC | 0/4 | 2 | 9 | ¼ | 3.9 | 455 (207) | 67¾ x 33¾ x 38¾ | 1711 x 854 x 987 |
| TPP-AT2-93D-2-HC | 2/2 | 4 | 12 | ¾ | 7.1 | 600 (273) | 93¾ x 33¾ x 38¾ | 2372 x 854 x 987 |
| TPP-AT2-93D-4-HC | 1/4 | 2 | 12 | ¾ | 7.1 | 600 (273) | 93¾ x 33¾ x 38¾ | 2372 x 854 x 987 |
| TPP-AT2-93D-6-HC | 0/6 | N/A | 12 | ¾ | 7.1 | 600 (273) | 93¾ x 33¾ x 38¾ | 2372 x 854 x 987 |
| TPP-AT-119D-2-HC | 3/2 | 8 | 15 | ¾ | 7.1 | 975 (443) | 119¼ x 33¾ x 38¾ | 3029 x 854 x 987 |
| TPP-AT-119D-4-HC | 2/4 | 4 | 15 | ¾ | 7.1 | 975 (443) | 119¼ x 33¾ x 38¾ | 3029 x 854 x 987 |
| TPP-AT-119D-6-HC | 1/6 | 2 | 15 | ¾ | 7.1 | 975 (443) | 119¼ x 33¾ x 38¾ | 3029 x 854 x 987 |
| TPP-AT-119D-8-HC | 0/8 | N/A | 15 | ¾ | 7.1 | 975 (443) | 119¼ x 33¾ x 38¾ | 3029 x 854 x 987 |

† Depth does not include 1" (26 mm) for rear bumpers and 1¾" (44 mm) for cutting board. * Height does not include 5¾" (146 mm) for castors or 6" (153 mm) for optional legs. note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

TPP® PIZZA PREP TABLES ~SPEC3 SERIES

| Model | Door/Drawers | # of Shelves | # of Pans (Top) | HP | Amps | Crated Weight (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|-----------------|----|------|---------------------|---------------------------------|---------------------------------|
| WITH DOORS | | | | | | | | |
| TPP-AT-44-HC~SPEC3 | 1/0 | 2 | 6 | ¼ | 3.9 | 330 (150) | 44½ x 33¾ x 38¾ | 1133 x 854 x 987 |
| TPP-AT-60-HC~SPEC3 | 2/0 | 4 | 8 | ¼ | 3.9 | 420 (191) | 60¼ x 33¾ x 38¾ | 1530 x 854 x 987 |
| TPP-AT-67-HC~SPEC3 | 2/0 | 4 | 9 | ¼ | 3.9 | 415 (188) | 67¾ x 33¾ x 38¾ | 1711 x 854 x 987 |
| TPP-AT2-93-HC~SPEC3 | 3/0 | 6 | 12 | ¾ | 7.1 | 600 (273) | 93¾ x 33¾ x 38¾ | 2372 x 854 x 987 |
| TPP-AT-119-HC~SPEC3 | 4/0 | 8 | 15 | ¾ | 7.1 | 725 (329) | 119¼ x 33¾ x 38¾ | 3029 x 854 x 987 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | | |
| TPP-AT-44D-2-HC~SPEC3 | 0/2 | N/A | 6 | ¼ | 3.9 | 330 (150) | 44½ x 33¾ x 38¾ | 1133 x 854 x 987 |
| TPP-AT-60D-2-HC~SPEC3 | 1/2 | 2 | 8 | ¼ | 3.9 | 415 (189) | 60¼ x 33¾ x 38¾ | 1530 x 854 x 987 |
| TPP-AT-67D-4-HC~SPEC3 | 0/4 | N/A | 9 | ¼ | 3.9 | 455 (207) | 67¾ x 33¾ x 38¾ | 1711 x 854 x 987 |
| TPP-AT2-93D-6-HC~SPEC3 | 0/6 | N/A | 12 | ¾ | 7.1 | 600 (273) | 93¾ x 33¾ x 38¾ | 2372 x 854 x 987 |
| TPP-AT-119D-8-HC~SPEC3 | 0/8 | N/A | 15 | ¾ | 7.1 | 975 (443) | 119¼ x 33¾ x 38¾ | 3029 x 854 x 987 |

† Depth does not include 1" (26 mm) for rear bumpers and 1¾" (44 mm) for cutting board. * Height does not include 5¾" (146 mm) for castors or 6" (153 mm) for optional legs. note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

TPP® TELESCOPING HOOD & TOPPING CATCHER OPTIONS

| Model | Model |
|-------------------------|-------------------------|
| TELESCOPING HOOD | TOPPING CATCHER |
| TPP-AT-44's | TPP-AT-44's |
| TPP-AT-60's/TPP-AT-67's | TPP-AT-60's/TPP-AT-67's |
| TPP-AT2-93's | TPP-AT2-93's |
| TPP-AT-119's | TPP-AT-119's |

Telescoping Hood & Topping Catcher options are available for all existing variations and voltages of TPP series models. Telescoping Hood & Topping Catcher options are available separately or combined. Telescoping Hood & Topping Catcher options are not field retrofittable.

TPP® PAN DIVIDERS

| Model | Standard | Cabinet Dimensions D x W (in) | Cabinet Dimensions D x W (mm) |
|---|----------|-------------------------------|-------------------------------|
| PAN DIVIDERS FOR CONDIMENT PANS (top of cabinet) | | | |
| TPP-AT-HC | | 15½ x 12½ | 24 x 320 |
| TPP-AT-HC | | 27½ x 12½ | 24 x 320 |
| TPP-AT-HC | | 1 x 12½ | 26 x 319 |
| PAN DIVIDERS FOR DRAWERS | | | |
| TPP-AT-HC | | 1½ x 12½ | 27 x 312 |
| TPP-AT-HC | ✓ | 1½ x 20½ | 22 x 516 |

note: Pan dividers not standard on TPP models.



UNDERCOUNTER & WORKTOP REFRIGERATION



The kitchen worktop is where your creations come to life. When it's time to prep your customer's favorites, you can rely on True to streamline your operations. Our variety of model options are flexible to meet your needs – whether you need a unit that slides under an existing countertop, or you're in need of a functional work surface for smooth operations.





UNDERCOUNTER REFRIGERATION

The undercounter series offers exceptional refrigeration that slides easily under existing countertops for space efficiency, or provides a functional work surface for easy food preparation and reliable cold storage.



UNDERCOUNTER REFRIGERATORS

Solid & Glass Doors, Solid Drawers



TUC-48-HC



TUC-27-HC-FGD01



TUC-27-HC



TUC-48D-4-HC



TUC-72-HC

Features/Benefits

- Refrigerators maintain cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- All stainless steel front, top and sides.
- Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
- Recessed handles
- Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawer models).
- Work surface 36" (915mm) high.
- Low profile models (31-7/8" (810mm) work surface height) upcharge applies or ADA compliant with 34" (864mm) work surface height available; no charge. (models -27, -36, -48, -60, -72).
- All production of True models comply with NSF/ANSI standard 7.
- Self-contained system.

Glass Door Model have...

- Energy efficient, "Low-E", thermal insulated glass doors on refrigerator models (triple pane thermal insulated glass on freezer models).
- Extruded, aluminum door frames.
- Each door fitted with 12" (305 mm) long extruded aluminum handle.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

Drawer Models have...

- Accommodates one 12" L x 20" W x 6" D (305mm x 508mm x 153mm) full size pan or two 1/2 pans or three 1/3 pans per drawer. (48" (1,220mm) models accommodate one 12" L x 18" W x 6" D (305mm x 408mm x 153mm) food storage box or one 1/3 size and one 1/2 size pan per drawer; not included).
- Door/drawer combination models require customer to designate door/drawer orientation.



TUC® UNDERCOUNTER REFRIGERATORS

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TUC-24-HC | 1/0 | 2 | 1/6 | 2.0 | 155 (71) | 24 1/8 x 24 7/8 x 31 1/8 | 613 x 630 x 802 |
| TUC-27-HC | 1/0 | 2 | 1/6 | 2.0 | 195 (89) | 27 5/8 x 30 1/8 x 29 3/4 | 702 x 766 x 756 |
| TUC-36-HC | 2/0 | 4 | 1/6 | 2.0 | 235 (107) | 36 3/8 x 30 1/8 x 29 3/4 | 924 x 766 x 756 |
| TUC-48-HC | 2/0 | 4 | 1/5 | 2.0 | 260 (118) | 48 3/8 x 30 1/8 x 29 3/4 | 1229 x 766 x 756 |
| TUC-60-HC | 2/0 | 4 | 1/4 | 4.0 | 320 (146) | 60 3/8 x 30 1/8 x 29 3/4 | 1534 x 766 x 756 |
| TUC-72-HC | 3/0 | 6 | 1/4 | 4.0 | 380 (173) | 72 3/8 x 30 1/8 x 29 3/4 | 1839 x 766 x 756 |
| GLASS DOORS | | | | | | | |
| TUC-24G-HC~FGD01 | 1/0 | 2 | 1/6 | 2.0 | 165 (75) | 24 x 24 3/4 x 31 1/8 | 610 x 629 x 804 |
| TUC-27G-HC~FGD01 | 1/0 | 2 | 1/6 | 2.0 | 205 (93) | 27 5/8 x 30 1/8 x 29 3/4 | 702 x 766 x 756 |
| TUC-48G-HC~FGD01 | 2/0 | 4 | 1/5 | 3.0 | 285 (130) | 48 3/8 x 30 1/8 x 29 3/4 | 1229 x 766 x 756 |
| TUC-60G-HC~FGD01 | 2/0 | 4 | 1/4 | 4.0 | 350 (159) | 60 3/8 x 30 1/8 x 29 3/4 | 1534 x 766 x 756 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | |
| TUC-27D-2-HC | 0/2 | N/A | 1/6 | 2.0 | 225 (103) | 27 5/8 x 30 1/8 x 29 3/4 | 702 x 766 x 756 |
| TUC-48D-2-HC | 1/2 | 2 | 1/5 | 3.0 | 310 (141) | 48 3/8 x 30 1/8 x 29 3/4 | 1229 x 766 x 756 |
| TUC-48D-4-HC | 0/4 | N/A | 1/5 | 3.0 | 330 (150) | 48 3/8 x 30 1/8 x 29 3/4 | 1229 x 766 x 756 |
| TUC-60D-2-HC | 1/2 | 2 | 1/4 | 4.0 | 445 (202) | 60 3/8 x 30 1/8 x 29 3/4 | 1534 x 766 x 756 |
| TUC-60D-4-HC | 0/4 | N/A | 1/4 | 4.0 | 400 (182) | 60 3/8 x 30 1/8 x 29 3/4 | 1534 x 766 x 756 |

† Depth does not include 1" (26mm) for rear bumpers and 1/2" (13mm) for glass door handles.

* Height does not include 6 1/4" (159mm) for castors or 6" (153mm) for optional legs. (Excludes TUC-24-HC)

note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

TFT™ UNDERCOUNTER FLAT TOP REFRIGERATORS


| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---------------------|--------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TFT-32-HC | 1/0 | 2 | 1/5 | 1.6 | 260 (118) | 32 1/2 x 31 1/2 x 35 7/8 | 816 x 800 x 911 |
| WITH DRAWERS | | | | | | | |
| TFT-32D-2-HC | 0/2 | N/A | 1/5 | 1.6 | 315 (143) | 32 1/2 x 31 1/2 x 35 7/8 | 816 x 800 x 911 |

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



DEEP UNDERCOUNTER REFRIGERATORS

Solid Doors & Drawers

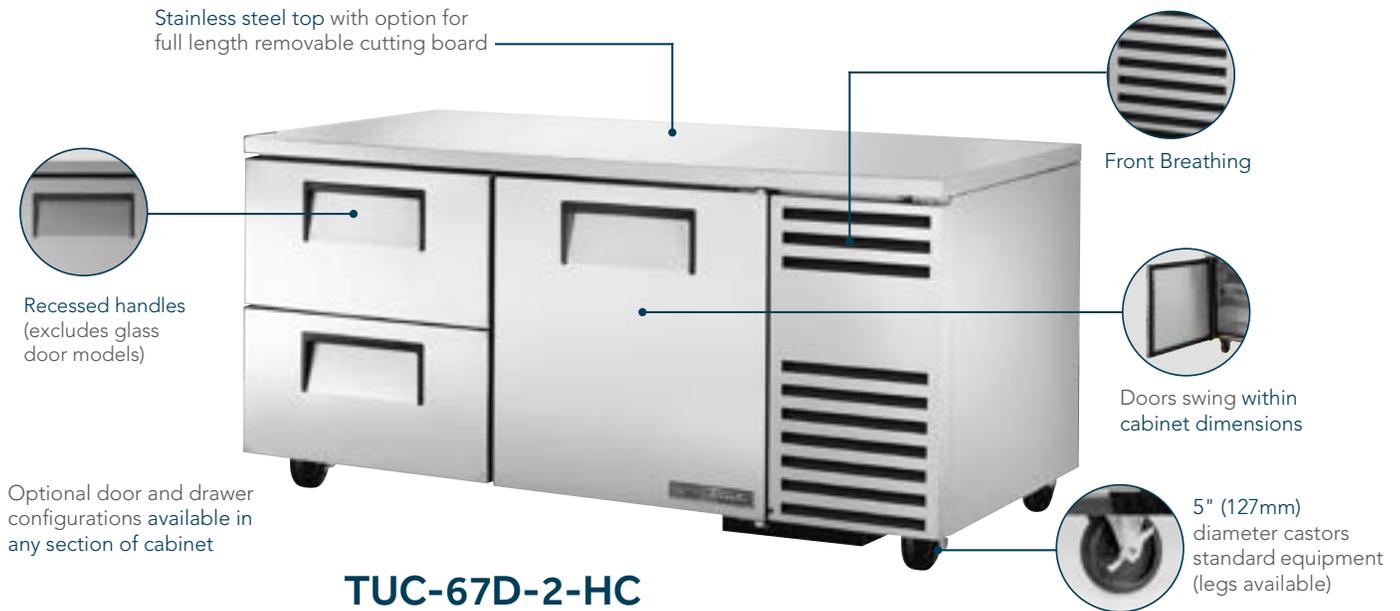

TUC-44-HC



TUC-60-32D-2-HC



TUC-67-HC



TUC-93D-4-HC

Features/Benefits

- Refrigerators maintain cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
 - Features the combined advantage of convenient undercounter placement with deeper refrigerated storage.
 - Easily slides under counters, maximizes space for refrigerated food storage in fast food line-up.
 - Balanced circular airflow for uniform product cooling.
 - All stainless steel front, top and sides.
 - Corrosion resistant GalFan coated steel back.
 - Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
 - Work surface 36" (915mm) high.
 - Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered models).
 - Front breathing.
 - Door models accommodate half bun tray rack; applies to only one door of TUC-60-32 (18" x 26" sheet pan (458mm x 661mm)) - not included.
 - All production of True models comply with NSF/ANSI standard 7.
 - Additional castor and leg options available.
 - Self-contained system.
- Drawer Models have...**
- Accommodates one 12" L x 20" W x 8" D (305mm x 508mm x 204mm) full size pan or four 1/2 pans or six 1/3 pans per drawer. Pans not included.
 - Door/drawer combination models require customer to designate door/drawer orientation.



TUC® DEEP UNDERCOUNTER REFRIGERATORS

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|------|------|-------------------------|--|---------------------------------|
| SOLID DOORS | | | | | | | |
| TUC-44-HC | 1/0 | 2 | 1/10 | 1.7 | 285 (123) | 44 ⁷ / ₈ x 32 ¹ / ₄ x 29 ³ / ₄ | 1138 x 818 x 756 |
| TUC-60-32-HC | 2/0 | 4 | 1/10 | 1.7 | 415 (189) | 60 ¹ / ₄ x 32 ¹ / ₄ x 29 ³ / ₄ | 1531 x 818 x 756 |
| TUC-67-HC | 2/0 | 4 | 1/10 | 1.7 | 410 (186) | 67 ¹ / ₄ x 32 ¹ / ₄ x 29 ³ / ₄ | 1709 x 818 x 756 |
| TUC-93-HC | 3/0 | 6 | 1/5 | 2.2 | 515 (234) | 93 ¹ / ₄ x 32 ¹ / ₄ x 29 ³ / ₄ | 2369 x 818 x 756 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | |
| TUC-44D-2-HC | 0/2 | N/A | 1/10 | 1.7 | 285 (130) | 44 ⁷ / ₈ x 32 ¹ / ₄ x 29 ³ / ₄ | 1138 x 818 x 756 |
| TUC-60-32D-2-HC | 1/2 | 2 | 1/10 | 1.7 | 345 (156) | 60 ¹ / ₄ x 32 ¹ / ₄ x 29 ³ / ₄ | 1531 x 818 x 756 |
| TUC-67D-2-HC | 1/2 | 2 | 1/10 | 1.7 | 485 (220) | 67 ¹ / ₄ x 32 ¹ / ₄ x 29 ³ / ₄ | 1708 x 818 x 756 |
| TUC-67D-4-HC | 0/4 | N/A | 1/10 | 1.7 | 390 (177) | 67 ¹ / ₄ x 32 ¹ / ₄ x 29 ³ / ₄ | 1708 x 818 x 756 |
| TUC-93D-2-HC | 2/2 | 4 | 1/5 | 2.2 | 640 (291) | 93 ¹ / ₄ x 32 ¹ / ₄ x 29 ³ / ₄ | 2369 x 818 x 756 |
| TUC-93D-4-HC | 1/4 | 2 | 1/5 | 2.2 | 640 (291) | 93 ¹ / ₄ x 32 ¹ / ₄ x 29 ³ / ₄ | 2369 x 818 x 756 |
| TUC-93D-6-HC | 0/6 | N/A | 1/5 | 2.2 | 550 (250) | 93 ¹ / ₄ x 32 ¹ / ₄ x 29 ³ / ₄ | 2369 x 818 x 756 |

† Depth does not include 1" (26mm) for rear bumpers or 1/4" (7mm) for front bumper.

* Height does not include 6 1/4" (159mm) for castors or 6" (153mm) for optional legs.

note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



UNDERCOUNTER REFRIGERATORS ~SPEC3 SERIES

Solid & Glass Doors, Solid Drawers



TUC-48-HC~SPEC3



TUC-27-HC~SPEC3



TUC-48G-HC~SPEC3



TUC-60-HC~SPEC3



TUC-60D-4-HC~SPEC3

Features/Benefits

- Refrigerators maintain cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- All stainless steel front, countertop, sides and back.
- Interior features stainless steel liner and stainless steel floor with coved corners.
- Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawer models).
- Doors swing within cabinet dimensions.
- Work surface 36" (915mm) high.
- Low profile models (31-7/8" (810mm) work surface height) upcharge applies or ADA compliant with 34" (864mm) work surface height available; no charge. (models -27, -36, -48, -60, -72).
- All production of True models comply with NSF/ANSI standard 7.
- Self-contained system.

Glass Door Model have...

- Energy efficient, "Low-E", double paned thermal insulated glass doors on refrigerator models (triple paned thermal insulated glass doors on freezer models).
- Extruded, aluminum door frames.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

Drawer Models have...

- Standard depth models accommodate one 12" L x 20" W x 8" D (305mm x 508mm x 204mm) full size pan or four 1/2 pans or six 1/3 pans per drawer. Pans not included.
- Door/drawer combination models require customer to designate door/drawer orientation.



TUC® UNDERCOUNTER REFRIGERATORS ~SPEC3 SERIES

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TUC-24-HC~SPEC3 | 1/0 | 2 | 1/6 | 2.0 | 155 (71) | 24 x 24¾ x 31½ | 610 x 629 x 804 |
| TUC-27-HC~SPEC3 | 1/0 | 2 | 1/6 | 2.0 | 185 (84) | 27½ x 29½ x 29¾ | 702 x 740 x 756 |
| TUC-36-HC~SPEC3 | 2/0 | 4 | 1/6 | 2.0 | 240 (109) | 36½ x 29½ x 29¾ | 922 x 740 x 756 |
| TUC-48-HC~SPEC3 | 2/0 | 4 | 1/5 | 2.0 | 305 (139) | 48½ x 29½ x 29¾ | 1229 x 740 x 756 |
| TUC-60-HC~SPEC3 | 2/0 | 4 | 1/4 | 4.0 | 355 (162) | 60½ x 29½ x 29¾ | 1534 x 740 x 756 |
| TUC-72-HC~SPEC3 | 3/0 | 6 | 1/4 | 4.0 | 380 (173) | 72½ x 29½ x 29¾ | 1839 x 740 x 756 |
| GLASS DOORS | | | | | | | |
| TUC-27G-HC~SPEC3 | 1/0 | 2 | 1/6 | 2.0 | 205 (93) | 27½ x 29½ x 29¾ | 702 x 740 x 756 |
| TUC-48G-HC~SPEC3 | 2/0 | 4 | 1/5 | 3.0 | 285 (130) | 48½ x 29½ x 29¾ | 1227 x 740 x 756 |
| TUC-60G-HC~SPEC3 | 2/0 | 4 | 1/4 | 4.0 | 350 (159) | 60½ x 29½ x 29¾ | 1534 x 740 x 756 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | |
| TUC-27D-2-HC~SPEC3 | 0/2 | N/A | 1/6 | 2.0 | 225 (103) | 27½ x 29½ x 29¾ | 702 x 740 x 756 |
| TUC-48D-2-HC~SPEC3 | 1/2 | 2 | 1/5 | 3.0 | 310 (141) | 48½ x 29½ x 29¾ | 1229 x 740 x 756 |
| TUC-48D-4-HC~SPEC3 | 0/4 | N/A | 1/5 | 3.0 | 330 (150) | 48½ x 29½ x 29¾ | 1229 x 740 x 756 |
| TUC-60D-2-HC~SPEC3 | 1/2 | 2 | 1/4 | 4.0 | 445(202) | 60½ x 29½ x 29¾ | 1534 x 740 x 756 |
| TUC-60D-4-HC~SPEC3 | 0/4 | N/A | 1/4 | 4.0 | 400 (182) | 60½ x 29½ x 29¾ | 1534 x 740 x 756 |

† Depth does not include 1½" (39mm) for door handles.

† Depth does not include 1" (26mm) for rear bumpers.

* Height does not include 6¼" (159mm) for castors or 6" (153mm) for optional legs. (Excludes TUC-24-HC~SPEC3)

note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



Undercounter | TUC® Deep~SPEC3

UNDERCOUNTER DEEP REFRIGERATORS ~SPEC3

Solid Doors & Drawers



TUC-67D-2-HC~SPEC3



TUC-44D-2-HC~SPEC3



TUC-60-32D-2-HC~SPEC3



TUC-67-HC~SPEC3



TUC-93D-2-HC~SPEC3

Features/Benefits

- Refrigerators maintain cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures..
- Features the combined advantage of convenient undercounter placement with deeper refrigerated storage.
- All stainless steel front, countertop, sides and back.
- Interior features stainless steel liner and stainless steel floor with coved corners.
- Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered models).
- Doors swing within cabinet dimensions.
- Work surface 36" (915mm) high.

- Accommodates half bun tray rack; applies to only one door of TUC-60-32 (18" x 26" sheet pan (458mm x 661mm)) - not included.
- ADA compliant with 34" (864mm) work surface height available; no charge.
- All production of True models comply with NSF/ANSI standard 7.
- Self-contained system.

Drawer Models have...

- Accommodates one 12" L x 20" W x 8" D (305mm x 508mm x 204mm) full size pan or four 1/2 pans or six 1/3 pans per drawer. Pans not included.
- Door/drawer combination models require customer to designate door/drawer orientation.



TUC® DEEP UNDERCOUNTER REFRIGERATORS ~SPEC3 SERIES

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|------|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TUC-44-HC~SPEC3 | 1/0 | 2 | 1/10 | 1.7 | 285 (130) | 44 7/8 x 32 1/4 x 29 3/4 | 1138 x 818 x 756 |
| TUC-60-32-HC~SPEC3 | 2/0 | 4 | 1/10 | 1.7 | 415 (189) | 60 1/4 x 32 1/4 x 29 3/4 | 1531 x 818 x 756 |
| TUC-67-HC~SPEC3 | 2/0 | 4 | 1/10 | 1.7 | 410 (186) | 67 1/4 x 32 1/4 x 29 3/4 | 1709 x 818 x 756 |
| TUC-93-HC~SPEC3 | 3/0 | 6 | 1/5 | 2.2 | 515 (234) | 93 1/4 x 32 1/4 x 29 3/4 | 2369 x 818 x 756 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | |
| TUC-44D-2-HC~SPEC3 | 0/2 | N/A | 1/10 | 1.7 | 270 (123) | 44 7/8 x 32 1/4 x 29 3/4 | 1138 x 818 x 756 |
| TUC-60-32D-2-HC~SPEC3 | 1/2 | 2 | 1/10 | 1.7 | 345 (156) | 60 1/4 x 32 1/4 x 29 3/4 | 1531 x 818 x 756 |
| TUC-67D-2-HC~SPEC3 | 1/2 | 2 | 1/10 | 1.7 | 430 (193) | 67 1/4 x 32 1/4 x 29 3/4 | 1709 x 818 x 756 |
| TUC-67D-4-HC~SPEC3 | 0/4 | N/A | 1/10 | 1.7 | 390 (177) | 67 1/4 x 32 1/4 x 29 3/4 | 1709 x 818 x 756 |
| TUC-93D-2-HC~SPEC3 | 2/2 | 4 | 1/5 | 2.2 | 640 (291) | 93 1/4 x 32 1/4 x 29 3/4 | 2369 x 818 x 756 |
| TUC-93D-4-HC~SPEC3 | 1/4 | 2 | 1/5 | 2.2 | 640 (291) | 93 1/4 x 32 1/4 x 29 3/4 | 2369 x 818 x 756 |
| TUC-93D-6-HC~SPEC3 | 0/6 | N/A | 1/5 | 2.2 | 685 (311) | 93 1/4 x 32 1/4 x 29 3/4 | 2369 x 818 x 756 |

† Depth does not include 1" (26mm) for rear bumpers or 1/4"(7mm) for front bumper.

* Height does not include 6 1/4" (159mm) for castors or 6"(153mm) for optional legs.

note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



UNDERCOUNTER FREEZERS

Solid Doors & Drawers



TUC-48F-HC



TUC-24F-HC



TUC-27F-D-2-HC



TUC-48F-D-4-HC



TUC-60F-HC

Features/Benefits

- Freezers maintain -10°F (-23.3°C) product temperatures.
- Automatic defrost system on freezer models time-initiated, time-terminated.
- All stainless steel front, top and sides.
- Corrosion resistant GalFan coated steel back.
- Interior - attractive, NSF/ANSI standard 7 approved, clear aluminum sides and top, coved corners and stainless steel floor.
- Recessed handles
- Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered models).
- Work surface 36" (915mm) high.
- Low profile models (31-7/8" (810mm) work surface height) upcharge applies or ADA compliant with 34" (864mm) work surface height available; no charge. (models -27, -36, -48, -60, -72).
- Self-contained system.

Glass Door Model have...

- Energy efficient, "Low-E", double paned thermal insulated glass doors on refrigerator models (triple paned thermal insulated glass on freezer models).
- Extruded, aluminum door frames.
- Each door fitted with 12" (305 mm) long extruded aluminum handle.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

Drawer Models have...

- Accommodates one 12" L x 20" W x 6" D (305mm x 508mm x 153mm) full size pan or two 1/2 pans or three 1/3 pans per drawer. (48" (1,220mm) models accommodate one 12" L x 18" W x 6" D (305mm x 408mm x 153mm) food storage box or one 1/3 size and one 1/2 size pan per drawer; not included).
- Door/drawer combination models require customer to designate door/drawer orientation.



TUC® UNDERCOUNTER FREEZERS

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---------------------|--------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TUC-24F-HC | 1/0 | 2 | ¼ | 2.3 | 165 (75) | 24 x 24¾ x 31½ | 610 x 629 x 804 |
| TUC-27F-HC | 1/0 | 2 | ¼ | 2.3 | 190 (87) | 27½ x 30½ x 29¾ | 702 x 766 x 756 |
| TUC-48F-HC | 2/0 | 4 | ½ | 3.2 | 275 (125) | 48¾ x 30½ x 29¾ | 1229 x 766 x 756 |
| TUC-60F-HC | 2/0 | 4 | ½ | 4.8 | 335 (152) | 60¾ x 30½ x 29¾ | 1534 x 766 x 756 |
| WITH DRAWERS | | | | | | | |
| TUC-27F-D-2-HC | 0/2 | N/A | ¼ | 2.3 | 220 (100) | 27½ x 30½ x 29¾ | 702 x 766 x 756 |
| TUC-48F-D-4-HC | 0/4 | N/A | ½ | 3.2 | 325 (148) | 48¾ x 30½ x 29¾ | 1229 x 766 x 756 |

† Depth does not include 1" (26mm) for rear bumpers.

* Height does not include 6¼"(159mm) for castors or 6"(153mm) for optional legs. (Excludes TUC-24-HC)

note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



DEEP UNDERCOUNTER FREEZERS

Solid Doors



TUC-44F-HC



TUC-67F-HC

Features/Benefits

- Freezers maintain -10°F (-23.3°C) product temperatures.
 - Features the combined advantage of convenient undercounter placement with deeper refrigerated storage.
 - Easily slides under counters, maximizes space for refrigerated food storage in fast food line-up.
 - Automatic defrost system on freezer models time-initiated, time-terminated.
 - 360° circular airflow for uniform product cooling.
 - All stainless steel front, top and sides.
 - Corrosion resistant GalFan coated steel back.
 - Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
 - Work surface 36" (915mm) high.
 - Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawer models).
 - Front breathing.
 - Door models accommodate half bun tray rack; applies to only one door of TUC-60-32 (18" x 26" (458mm x 661mm) sheet pan) - not included.
 - All production of True models comply with NSF/ANSI standard 7.
 - Available with optional 3" (77mm) diameter castors.
 - Self-contained system.
- Drawer Models have...**
- Accommodates one 12" L x 20" W x 8" D (305mm x 508mm x 204mm) full size pan or four 1/2 pans or six 1/3 pans per drawer. Pans not included.
 - Door/drawer combination models require customer to designate door/drawer orientation.



TUC® DEEP UNDERCOUNTER FREEZERS

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---------------|--------------|--------------|----|------|-------------------------|--|---------------------------------|
| SOLID DOORS | | | | | | | |
| TUC-44F-HC | 1/0 | 2 | ½ | 5.8 | 285 (130) | 44 ⁷ / ₈ x 32 ¹ / ₄ x 29 ³ / ₄ | 1138 x 820 x 756 |
| TUC-60-32F-HC | 2/0 | 4 | ½ | 5.8 | 415 (189) | 60 ¹ / ₄ x 32 ¹ / ₄ x 29 ³ / ₄ | 1531 x 820 x 756 |
| TUC-67F-HC | 2/0 | 4 | ½ | 5.8 | 400 (182) | 67 ¹ / ₄ x 32 ¹ / ₄ x 29 ³ / ₄ | 1709 x 820 x 756 |

† Depth does not include 1" (26mm) for rear bumpers or ¼"(7mm) for front bumper.

* Height does not include 6¼"(159mm) for castors or 6" (153mm) for optional legs.

note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



UNDERCOUNTER FREEZERS ~SPEC3 SERIES

Solid Doors & Drawers



TUC-48F-HC~SPEC3



TUC-27F-HC~SPEC3



TUC-27F-D-2-HC~SPEC3



TUC-48F-D-4-HC~SPEC3



TUC-60F-HC~SPEC3

Features/Benefits

- Freezers maintain -10°F (-23.3°C) product temperatures.
- Automatic defrost system on freezer models time-initiated, time-terminated.
- All stainless steel front, countertop, sides and back.
- Interior features stainless steel liner and stainless steel floor with coved corners.
- Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawer models).
- Doors swing within cabinet dimensions.
- Work surface 36" (915mm) high.
- Low profile models (31-7/8" (810mm) work surface height) upcharge applies or ADA compliant with 34" (864mm) work surface height available; no charge. (models -27, -36, -48, -60, -72).
- All production of True models comply with NSF/ANSI standard 7.
- Self-contained system.

Glass Door Model have...

- Energy efficient, "Low-E", double paned thermal insulated glass doors on refrigerator models (triple pane thermal insulated glass on freezer models).
- Extruded, aluminum door frames.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

Drawer Models have...

- Standard depth models accommodate one 12" L x 20" W x 8" D (305mm x 508mm x 204mm) full size pan or four 1/2 pans or six 1/3 pans per drawer. Pans not included.
- Door/drawer combination models require customer to designate door/drawer orientation.



TUC® UNDERCOUNTER FREEZERS ~SPEC3 SERIES

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|----------------------|--------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TUC-27F-HC~SPEC3 | 1/0 | 2 | ¼ | 2.3 | 210 (96) | 27½ x 29½ x 29¾ | 702 x 740 x 756 |
| TUC-48F-HC~SPEC3 | 2/0 | 4 | ⅓ | 3.2 | 275 (125) | 48¾ x 29½ x 29¾ | 1229 x 740 x 756 |
| TUC-60F-HC~SPEC3 | 2/0 | 4 | ½ | 4.8 | 335 (152) | 60¾ x 29½ x 29¾ | 1534 x 740 x 756 |
| WITH DRAWERS | | | | | | | |
| TUC-27F-D-2-HC~SPEC3 | 0/2 | N/A | ¼ | 2.3 | 220 (100) | 27½ x 29½ x 29¾ | 700 x 740 x 756 |
| TUC-48F-D-4-HC~SPEC3 | 0/4 | N/A | ⅓ | 3.2 | 325 (148) | 48¾ x 29½ x 29¾ | 1229 x 740 x 756 |

† Depth does not include 1¾" (45mm) for door handles.

† Depth does not include 1" (26mm) for rear bumpers or ¼" (7mm) for front bumper.

* Height does not include 6¼" (159mm) for castors or 6" (153mm) for optional legs.

note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



Undercounter | TUC® Deep~SPEC3

UNDERCOUNTER DEEP FREEZERS ~SPEC3

Solid Doors



TUC-44F-HC~SPEC3



TUC-67F-HC~SPEC3

Features/Benefits

- Freezers maintain -10°F (-23.3°C) product temperatures.
- Automatic defrost system on freezer models time-initiated, time-terminated.
- Features the combined advantage of convenient undercounter placement with deeper refrigerated storage.
- All stainless steel front, countertop, sides and back.
- Interior features stainless steel liner and stainless steel floor with coved corners.
- Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawer models).
- Doors swing within cabinet dimensions.
- Work surface 36" (915mm) high.

- Accommodates half bun tray rack; applies to only one door of TUC-60-32 (18" x 26" (458mm x 661mm) sheet pan) - not included.
- ADA compliant with 34" (864mm) work surface height available; no charge.
- All production of True models comply with NSF/ANSI standard 7.
- Self-contained system.

Drawer Models have...

- Accommodates one 12" L x 20" W x 8" D (305mm x 508mm x 204mm) full size pan or four 1/2 pans or six 1/3 pans per drawer. Pans not included.
- Door/drawer combination models require customer to designate door/drawer orientation.



TUC® DEEP UNDERCOUNTER FREEZERS ~SPEC3 SERIES

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---------------------|--------------|--------------|----|------|-------------------------|--|---------------------------------|
| SOLID DOORS | | | | | | | |
| TUC-44F-HC~SPEC3 | 1/0 | 2 | ½ | 5.8 | 285 (130) | 44 ⁷ / ₈ x 32 ¹ / ₄ x 29 ³ / ₄ | 1138 x 818 x 765 |
| TUC-60-32F-HC~SPEC3 | 2/0 | 4 | ½ | 5.8 | 415 (189) | 60 ¹ / ₄ x 32 ¹ / ₄ x 29 ³ / ₄ | 1531 x 818 x 765 |
| TUC-67F-HC~SPEC3 | 2/0 | 4 | ½ | 5.8 | 430 (196) | 67 ¹ / ₄ x 32 ¹ / ₄ x 29 ³ / ₄ | 1709 x 818 x 765 |

† Depth does not include 1" (26mm) for rear bumpers or ¼" (7mm) for front bumper.

* Height does not include 6¼" (159mm) for castors or 6" (153mm) for optional legs.

note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



Undercounter | TUC® (ADA & LP)

AMERICAN DISABILITY ACT (ADA) COMPLIANT & LOW PROFILE (LP) PACKAGES

Solid Doors & Drawers



ADA models feature 3" (77mm) diameter castors



TUC-27-HC



LP models feature 1-½" (39mm) diameter, dual swivel castors



TUC-27-HC

Features/Benefits

ADA Models...


- True undercounter units are designed to accommodate American Disabilities Act (ADA) requirements.
- ADA Compliant models have 3" (127mm) castors
- ADA Compliant models have 34" (864mm) counter heights.

LP Models...

- "Low Profile" models are designed to slide easily under custom built countertops.
- Low profile models have 1-1/2" (39mm) castors
- Low profile models have 31-7/8" (810mm) work surface heights.


True Undercounter Units Are Designed To Accommodate American Disabilities Act (ADA) Requirements.

PLAN VIEW COMPARISON

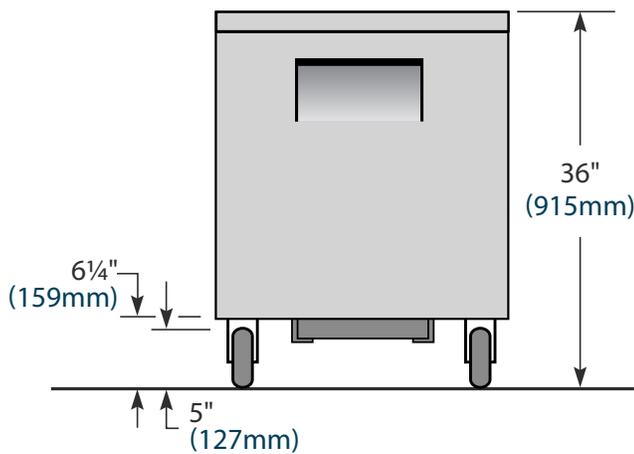


Standard

36" (915mm) Height

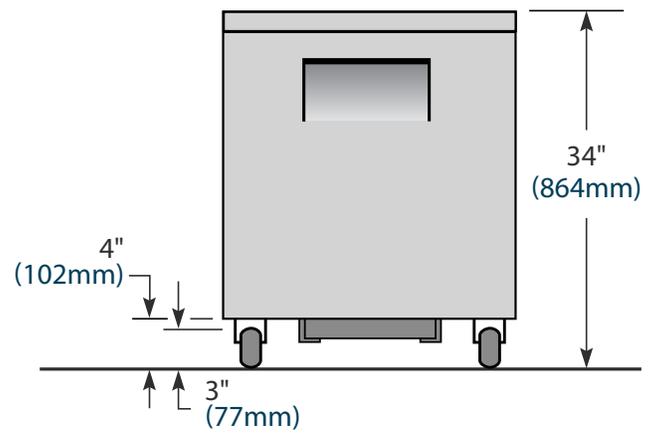

ADA Compliant

34" (864mm) Height

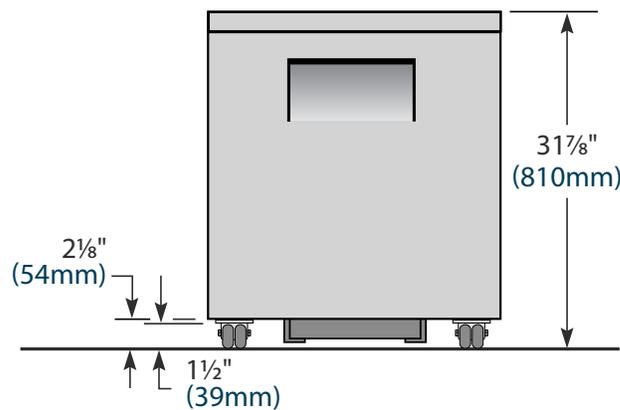

Low Profile

31-7/8" (810mm) Height



WORKTOP REFRIGERATION

Worktop refrigerators provide a functional work surface as well as a one-piece formed construction stainless backsplash and 360° circular airflow for the most efficient and uniform product cooling.



WORKTOP REFRIGERATORS

Solid Doors & Drawers



TWT-27D-2-HC



TWT-27F-HC



TWT-60D-4-HC



TWT-72-HC

Features/Benefits

- Refrigerators maintain cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
 - All stainless steel front, top and sides.
 - Corrosion resistant GalFan coated steel back.
 - Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
 - One piece formed construction backsplash prevents bacteria and food particles from being trapped underneath as with other two piece worktop units
 - Recessed handles
 - Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered models).
 - Work surface 36" (915mm) high.
 - Swing doors are self-closing with 90° stay open feature.
 - ADA compliant with 34" (864mm) work surface height available; no charge. (models -27, -36, -48, -60, -72).
 - All production of True models comply with NSF/ANSI standard 7.
 - Self-contained system.
- Drawer Models have...**
- Accommodates one 12"L x 20"W x 6"D (305mm x 508mm x 153mm) full size pan or two 1/2 pans or three 1/3 pans per drawer. (48" (1,220mm) models accommodate one 12"L x 18"W x 6"D (305mm x 408mm x 153mm) food storage box or one 1/3 size and one 1/2 size pan per drawer; not included).
 - Door/drawer combination models require customer to designate door/drawer orientation.



TWT™ WORKTOP REFRIGERATORS

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|-----|------|-------------------------|--|---------------------------------|
| SOLID DOORS | | | | | | | |
| TWT-27-HC | 1/0 | 2 | 1/6 | 2.0 | 195 (89) | 27 ³ / ₈ x 30 ¹ / ₈ x 33 ³ / ₈ | 702 x 766 x 848 |
| TWT-36-HC | 2/0 | 4 | 1/6 | 2.0 | 240 (109) | 36 ³ / ₈ x 30 ¹ / ₈ x 33 ³ / ₈ | 924 x 766 x 848 |
| TWT-48-HC | 2/0 | 4 | 1/5 | 2.0 | 280 (128) | 48 ³ / ₈ x 30 ¹ / ₈ x 33 ³ / ₈ | 1229 x 766 x 848 |
| TWT-60-HC | 2/0 | 4 | 1/4 | 4.0 | 345 (157) | 60 ³ / ₈ x 30 ¹ / ₈ x 33 ³ / ₈ | 1534 x 766 x 848 |
| TWT-72-HC | 3/0 | 6 | 1/4 | 4.0 | 405 (184) | 72 ³ / ₈ x 30 ¹ / ₈ x 33 ³ / ₈ | 1839 x 766 x 848 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | |
| TWT-27D-2-HC | 0/2 | N/A | 1/6 | 2.0 | 215 (98) | 27 ³ / ₈ x 30 ¹ / ₈ x 33 ³ / ₈ | 702 x 766 x 848 |
| TWT-48D-2-HC | 1/2 | 2 | 1/5 | 3.0 | 330 (150) | 48 ³ / ₈ x 30 ¹ / ₈ x 33 ³ / ₈ | 1229 x 766 x 848 |
| TWT-48D-4-HC | 0/4 | N/A | 1/5 | 3.0 | 330 (150) | 48 ³ / ₈ x 30 ¹ / ₈ x 33 ³ / ₈ | 1229 x 766 x 848 |
| TWT-60D-2-HC | 1/2 | 2 | 1/4 | 4.0 | 345 (157) | 60 ³ / ₈ x 30 ¹ / ₈ x 33 ³ / ₈ | 1534 x 766 x 848 |
| TWT-60D-4-HC | 0/4 | N/A | 1/4 | 4.0 | 410 (186) | 60 ³ / ₈ x 30 ¹ / ₈ x 33 ³ / ₈ | 1534 x 766 x 848 |

† Depth does not include 1" (26mm) for rear bumpers.

* Height does not include 6¹/₄" (159mm) for castors or 6" (153mm) for optional legs.

note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



WORKTOP DEEP REFRIGERATORS

Solid Doors & Drawers



TWT-67D-2-HC



TWT-44F-HC



TWT-60-32D-2-HC



TWT-67D-4-HC



TWT-93D-4-HC

Features/Benefits

- Refrigerators maintain cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
 - All stainless steel front, top and sides.
 - Corrosion resistant GalFan coated steel back.
 - Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
 - One piece formed construction backsplash prevents bacteria and food particles from being trapped underneath as with other two piece worktop units.
 - 360° circular airflow for uniform product cooling.
 - Recessed handles.
 - Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered models).
 - Work surface 36" (915mm) high.
 - Swing doors are self-closing with 90° stay open feature.
 - Accommodates half bun tray rack; applies to only one door of TWT-60-32-HC (18" x 26" sheet pan (458mm x 661mm)) - not included.
 - ADA compliant with 34" (864mm) work surface height available; no charge. (models -27, -36, -48, -60, -72).
 - All production of True models comply with NSF/ANSI standard 7.
 - Self-contained system.
- Drawer Models have...**
- Accommodates one 12"L x 20"W x 8"D (305mm x 508mm x 204mm) full size pan or two 1/2 pans or three 1/3 pans per drawer. (48" (1,220mm) models accommodate one 12"L x 18"W x 6"D (305mm x 408mm x 153mm) food storage box or one 1/3 size and one 1/2 size pan per drawer; not included).
 - Door/drawer combination models require customer to designate door/drawer orientation.



TWT™ DEEP WORKTOP REFRIGERATORS

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|------|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TWT-44-HC | 1/0 | 2 | 1/10 | 1.7 | 320 (130) | 44½ x 32¾ x 33¾ | 1131 x 823 x 848 |
| TWT-60-32-HC | 2/0 | 4 | 1/10 | 1.7 | 415 (189) | 60¼ x 32¾ x 33¾ | 1531 x 823 x 848 |
| TWT-67-HC | 2/0 | 4 | 1/10 | 1.7 | 410 (186) | 67¼ x 32¾ x 33¾ | 1709 x 823 x 848 |
| TWT-93-HC | 3/0 | 6 | 1/5 | 2.2 | 550 (250) | 93¼ x 32¾ x 33¾ | 2369 x 823 x 848 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | |
| TWT-44D-2-HC | 0/2 | N/A | 1/10 | 1.7 | 320 (146) | 44½ x 32¾ x 33¾ | 1131 x 823 x 848 |
| TWT-60-32D-2-HC | 1/2 | 2 | 1/10 | 1.7 | 415 (189) | 60¼ x 32¾ x 33¾ | 1531 x 823 x 848 |
| TWT-67D-2-HC | 1/2 | 2 | 1/10 | 1.7 | 430 (196) | 67¼ x 32¾ x 33¾ | 1709 x 823 x 848 |
| TWT-67D-4-HC | 0/4 | N/A | 1/10 | 1.7 | 500 (186) | 67¼ x 32¾ x 33¾ | 1709 x 823 x 848 |
| TWT-93D-2-HC | 2/2 | 4 | 1/5 | 2.2 | 580 (264) | 93¼ x 32¾ x 33¾ | 2369 x 823 x 848 |
| TWT-93D-4-HC | 1/4 | 2 | 1/5 | 2.2 | 580 (264) | 93¼ x 32¾ x 33¾ | 2369 x 823 x 848 |
| TWT-93D-6-HC | 0/6 | N/A | 1/5 | 2.2 | 550 (250) | 93¼ x 32¾ x 33¾ | 2369 x 823 x 848 |

† Depth does not include 1" (26mm) for rear bumpers or ¼" (7mm) for front bumper.

* Height does not include 6¼" (159mm) for castors or 6" (153mm) for optional legs.

note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



WORKTOP REFRIGERATORS ~SPEC3 SERIES

Solid Doors & Drawers



TWT-48D-2-HC~SPEC3



TWT-27F-HC~SPEC3



TWT-27D-2-HC~SPEC3



TWT-60D-2-HC~SPEC3



TWT-72-HC~SPEC3

Features/Benefits

- Refrigerators maintain cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
 - All stainless steel front, countertop, sides, and back.
 - Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
 - One piece formed construction backsplash prevents bacteria and food particles from being trapped underneath as with other two piece worktop units
 - Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered models).
 - Heavy-duty 16 gauge top and 20 gauge door and drawer fronts.
 - Work surface 36" (915mm) high.
 - Swing doors are self-closing with 90° stay open feature.
 - ADA compliant with 34" (864mm) work surface height available; no charge. (models -27, -36, -48, -60, -72).
 - All production of True models comply with NSF/ANSI standard 7.
 - Self-contained system.
- Drawer Models have...**
- Accommodates one 12" L x 20" W x 6" D (305mm x 508mm x 153mm) full size pan or two 1/2 pans or three 1/3 pans per drawer. (48" (1,220mm) models accommodate one 12" L x 18" W x 6" D (305mm x 408mm x 153mm) food storage box or one 1/3 size and one 1/2 size pan per drawer; not included).
 - Door/drawer combination models require customer to designate door/drawer orientation.



TWT™ WORKTOP REFRIGERATORS ~SPEC3 SERIES

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|-----|------|-------------------------|--|---------------------------------|
| SOLID DOORS | | | | | | | |
| TWT-27-HC~SPEC3 | 1/0 | 2 | 1/6 | 2.0 | 195 (89) | 27 ⁵ / ₈ x 29 ¹ / ₈ x 33 ¹ / ₄ | 702 x 740 x 845 |
| TWT-36-HC~SPEC3 | 2/0 | 4 | 1/6 | 2.0 | 240 (109) | 36 ³ / ₈ x 29 ¹ / ₈ x 33 ¹ / ₄ | 924 x 740 x 845 |
| TWT-48-HC~SPEC3 | 2/0 | 4 | 1/5 | 2.0 | 280 (128) | 48 ³ / ₈ x 29 ¹ / ₈ x 33 ¹ / ₄ | 1229 x 740 x 845 |
| TWT-60-HC~SPEC3 | 2/0 | 4 | 1/4 | 4.0 | 345 (157) | 60 ³ / ₈ x 29 ¹ / ₈ x 33 ¹ / ₄ | 1534 x 740 x 845 |
| TWT-72-HC~SPEC3 | 3/0 | 6 | 1/4 | 4.0 | 405 (184) | 72 ³ / ₈ x 29 ¹ / ₈ x 33 ¹ / ₄ | 1839 x 740 x 845 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | |
| TWT-27D-2-HC~SPEC3 | 0/2 | N/A | 1/6 | 2.0 | 195 (89) | 27 ⁵ / ₈ x 29 ¹ / ₈ x 33 ¹ / ₄ | 702 x 740 x 845 |
| TWT-48D-2-HC~SPEC3 | 1/2 | 2 | 1/5 | 3.0 | 330 (150) | 48 ³ / ₈ x 29 ¹ / ₈ x 33 ¹ / ₄ | 1229 x 740 x 845 |
| TWT-48D-4-HC~SPEC3 | 0/4 | N/A | 1/5 | 3.0 | 330 (150) | 48 ³ / ₈ x 29 ¹ / ₈ x 33 ¹ / ₄ | 1229 x 740 x 845 |
| TWT-60D-2-HC~SPEC3 | 1/2 | 2 | 1/4 | 4.0 | 345 (157) | 60 ³ / ₈ x 29 ¹ / ₈ x 33 ¹ / ₄ | 1534 x 740 x 845 |
| TWT-60D-4-HC~SPEC3 | 0/4 | N/A | 1/4 | 4.0 | 410 (186) | 60 ³ / ₈ x 29 ¹ / ₈ x 33 ¹ / ₄ | 1534 x 740 x 845 |

† Depth does not include 1 1/2" (39 mm) for door handles.

† Depth does not include 1" (26mm) for rear bumpers.

* Height does not include 6 1/4" (159mm) for castors or 6" (153mm) for optional legs.

note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



WORKTOP DEEP REFRIGERATORS ~SPEC3 SERIES

Solid Doors & Drawers



TWT-67D-2-HC~SPEC3



TWT-44D-2-HC-SPEC3



TWT-44-HC-SPEC3



TWT-60-32F-HC-SPEC3



TWT-93D-6-HC-SPEC3

Features/Benefits

- Refrigerators maintain cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
 - All stainless steel front, countertop, sides and back.
 - Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
 - One piece formed construction backsplash prevents bacteria and food particles from being trapped underneath as with other two piece worktop units.
 - 360° circular airflow for uniform product cooling.
 - Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered models).
 - Heavy-duty 16 gauge top and 20 gauge door and drawer fronts.
 - Work surface 36" (915mm) high.
 - Swing doors are self-closing with 90° stay open feature.
 - Accommodates half bun tray rack; applies to only one door of TWT-60-32-HC (18" x 26" sheet pan (458mm x 661mm)) - not included.
 - ADA compliant with 34" (864mm) work surface height available; no charge. (models -27, -36, -48, -60, -72).
 - All production of True models comply with NSF/ANSI standard 7.
 - Self-contained system.
- Drawer Models have...**
- Accommodates one 12"L x 20"W x 8"D (305mm x 508mm x 204mm) full size pan or two 1/2 pans or three 1/3 pans per drawer. (48" (1,220mm) models accommodate one 12"L x 18"W x 6"D (305mm x 408mm x 153mm) food storage box or one 1/3 size and one 1/2 size pan per drawer; not included).
 - Door/drawer combination models require customer to designate door/drawer orientation.



TWT™ DEEP WORKTOP REFRIGERATORS ~SPEC3 SERIES

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|--------------|--------------|------|------|-------------------------|--|---------------------------------|
| SOLID DOORS | | | | | | | |
| TWT-44-HC~SPEC3 | 1/0 | 2 | 1/10 | 1.7 | 320 (146) | 44 ⁷ / ₈ x 32 ¹ / ₄ x 33 ¹ / ₄ | 1138 x 820 x 845 |
| TWT-60-32-HC~SPEC3 | 2/0 | 4 | 1/10 | 1.7 | 415 (189) | 60 ¹ / ₄ x 32 ¹ / ₄ x 33 ¹ / ₄ | 1531 x 820 x 845 |
| TWT-67-HC~SPEC3 | 2/0 | 4 | 1/10 | 1.7 | 410 (186) | 67 ¹ / ₄ x 32 ¹ / ₄ x 33 ¹ / ₄ | 1709 x 820 x 845 |
| TWT-93-HC~SPEC3 | 3/0 | 6 | 1/5 | 2.2 | 550 (250) | 93 ¹ / ₄ x 32 ¹ / ₄ x 33 ¹ / ₄ | 2369 x 820 x 845 |
| WITH DRAWERS OR DOOR/DRAWER COMBO | | | | | | | |
| TWT-44D-2-HC~SPEC3 | 0/2 | N/A | 1/10 | 1.7 | 320 (146) | 44 ⁷ / ₈ x 32 ¹ / ₄ x 33 ¹ / ₄ | 1138 x 820 x 845 |
| TWT-60-32D-2-HC~SPEC3 | 1/2 | 2 | 1/10 | 1.7 | 415 (189) | 60 ¹ / ₄ x 32 ¹ / ₄ x 33 ¹ / ₄ | 1531 x 820 x 845 |
| TWT-67D-2-HC~SPEC3 | 1/2 | 2 | 1/10 | 1.7 | 430 (196) | 67 ¹ / ₄ x 32 ¹ / ₄ x 33 ¹ / ₄ | 1709 x 820 x 845 |
| TWT-67D-4-HC~SPEC3 | 0/4 | N/A | 1/10 | 1.7 | 500 (227) | 67 ¹ / ₄ x 32 ¹ / ₄ x 33 ¹ / ₄ | 1709 x 820 x 845 |
| TWT-93D-2-HC~SPEC3 | 2/2 | 4 | 1/5 | 2.2 | 580 (264) | 93 ¹ / ₄ x 32 ¹ / ₄ x 33 ¹ / ₄ | 2369 x 820 x 845 |
| TWT-93D-4-HC~SPEC3 | 1/4 | 2 | 1/5 | 2.2 | 580 (264) | 93 ¹ / ₄ x 32 ¹ / ₄ x 33 ¹ / ₄ | 2369 x 820 x 845 |
| TWT-93D-6-HC~SPEC3 | 0/6 | N/A | 1/5 | 2.2 | 550 (250) | 93 ¹ / ₄ x 32 ¹ / ₄ x 33 ¹ / ₄ | 2369 x 820 x 845 |

† Depth does not include 1¹/₂" (39 mm) for door handles.

‡ Depth does not include 1" (26mm) for rear bumpers or 1/4" (7mm) for front bumper.

* Height does not include 6¹/₄" (159mm) for castors or 6" (153mm) for optional legs.

note: Door/drawer combination cabinets require customer to designate door/drawer orientation.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



WORKTOP FREEZERS

Solid Doors



TWT-48F-HC



TWT-27F-HC



TWT-60F-HC

Features/Benefits

- Freezers maintain -10°F (-23.3°C) product temperatures.
- Automatic defrost system on freezer models time-initiated, time-terminated.
- All stainless steel front, top and sides.
- Corrosion resistant GalFan coated steel back.
- Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
- One piece formed construction backslash prevents bacteria and food particles from being trapped underneath as with other two piece worktop units
- Recessed handles
- Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered models).
- Work surface 36" (915mm) high.

- Swing doors are self-closing with 90° stay open feature.
- ADA compliant with 34" (864mm) work surface height available; no charge. (models -27, -36, -48, -60, -72).
- All production of True models comply with NSF/ANSI standard 7.
- Self-contained system.

Drawer Models have...

- Accommodates one 12"L x 20"W x 6"D (305mm x 508mm x 153mm) full size pan or two 1/2 pans or three 1/3 pans per drawer. (48" (1,220mm) models accommodate one 12"L x 18"W x 6"D (305mm x 408mm x 153mm) food storage box or one 1/3 size and one 1/2 size pan per drawer; not included).
- Door/drawer combination models require customer to designate door/drawer orientation.



TWT™ WORKTOP FREEZERS

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------|--------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TWT-27F-HC | 1/0 | 2 | ¼ | 2.3 | 210 (96) | 27½ x 30½ x 33¾ | 702 x 766 x 848 |
| TWT-48F-HC | 2/0 | 4 | ⅓ | 3.2 | 285 (130) | 48¾ x 30½ x 33¾ | 1229 x 766 x 848 |
| TWT-60F-HC | 2/0 | 4 | ½ | 4.8 | 375 (171) | 60¾ x 30½ x 33¾ | 1534 x 766 x 848 |

† Depth does not include 1" (26mm) for rear bumpers.

* Height does not include 6¼" (159mm) for castors or 6" (153mm) for optional legs.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



WORKTOP DEEP FREEZERS

Solid Doors



TWT-67F-HC



TWT-44F-HC



TWT-60-32F-HC

Features/Benefits

- Freezers maintain -10°F (-23.3°C) product temperatures.
 - Automatic defrost system on freezer models time-initiated, time-terminated.
 - All stainless steel front, top and sides.
 - Corrosion resistant GalFan coated steel back.
 - Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
 - One piece formed construction backsplash prevents bacteria and food particles from being trapped underneath as with other two piece worktop units.
 - 360° circular airflow for uniform product cooling.
 - Recessed handles.
 - Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawer models).
 - Work surface 36" (915mm) high.
 - Swing doors are self-closing with 90° stay open feature.
 - Accommodates half bun tray rack; applies to only one door of TWT-60-32-HC (18" x 26" sheet pan (458mm x 661mm)) - not included.
 - ADA compliant with 34" (864mm) work surface height available; no charge. (models -27, -36, -48, -60, -72).
 - All production of True models comply with NSF/ANSI standard 7.
 - Self-contained system.
- Drawer Models have...**
- Accommodates one 12" L x 20" W x 8" D (305mm x 508mm x 204mm) full size pan or two 1/2 pans or three 1/3 pans per drawer. (48" (1,220mm) models accommodate one 12" L x 18" W x 6" D (305mm x 408mm x 153mm) food storage box or one 1/3 size and one 1/2 size pan per drawer; not included).
 - Door/drawer combination models require customer to designate door/drawer orientation.



TWT™ DEEP WORKTOP FREEZERS

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------|--------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TWT-44F-HC | 1/0 | 2 | ½ | 5.8 | 320 (146) | 44½ x 32¾ x 33¾ | 1131 x 823 x 848 |
| TWT-60-32F-HC | 2/0 | 4 | ½ | 5.8 | 415 (189) | 60¼ x 32¾ x 33¾ | 1531 x 823 x 848 |
| TWT-67F-HC | 2/0 | 4 | ½ | 5.8 | 440 (200) | 67¼ x 32¾ x 33¾ | 1709 x 823 x 848 |

† Depth does not include 1" (26mm) for rear bumpers or ¼" (7mm) for front bumper.

* Height does not include 6¼" (159mm) for castors or 6" (153mm) for optional legs.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



WORKTOP FREEZERS ~SPEC3 SERIES

Solid Doors



TWT-48F-HC~SPEC3



TWT-27F-HC~SPEC3



TWT-60D-2-HC~SPEC3

Features/Benefits

- Freezers maintain -10°F (-23.3°C) product temperatures.
- Automatic defrost system on freezer models time-initiated, time-terminated.
- All stainless steel front, countertop, sides, and back.
- Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
- One piece formed construction backsplash prevents bacteria and food particles from being trapped underneath as with other two piece worktop units
- Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawer models).
- Heavy-duty 16 gauge top and 20 gauge door and drawer fronts.
- Work surface 36" (915mm) high.

- Swing doors are self-closing with 90° stay open feature.
- ADA compliant with 34" (864mm) work surface height available; no charge. (models -27, -36, -48, -60, -72).
- All production of True models comply with NSF/ANSI standard 7.
- Self-contained system.

Drawer Models have...

- Accommodates one 12" L x 20" W x 6" D (305mm x 508mm x 153mm) full size pan or two 1/2 pans or three 1/3 pans per drawer. (48" (1,220mm) models accommodate one 12" L x 18" W x 6" D (305mm x 408mm x 153mm) food storage box or one 1/3 size and one 1/2 size pan per drawer; not included).
- Door/drawer combination models require customer to designate door/drawer orientation.



TWT™ WORKTOP FREEZERS ~SPEC3 SERIES

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------|--------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TWT-27F-HC~SPEC3 | 1/0 | 2 | ¼ | 2.3 | 210 (96) | 27½ x 29½ x 33¼ | 702 x 740 x 845 |
| TWT-48F-HC~SPEC3 | 2/0 | 4 | ⅓ | 3.2 | 285 (130) | 48¾ x 29½ x 33¼ | 1229 x 740 x 845 |
| TWT-60F-HC~SPEC3 | 2/0 | 4 | ½ | 4.8 | 375 (171) | 60¾ x 29½ x 33¼ | 1534 x 740 x 845 |

† Depth does not include 1½" (39 mm) for door handles.

† Depth does not include 1" (26mm) for rear bumpers.

* Height does not include 6¼" (159mm) for castors or 6" (153mm) for optional legs.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



WORKTOP DEEP FREEZERS ~SPEC3 SERIES

Solid Doors



TWT-44F-HC~SPEC3



TWT-60-32F-HC~SPEC3

Features/Benefits

- Freezers maintain -10°F (-23.3°C) product temperatures.
 - Automatic defrost system on freezer models time-initiated, time-terminated.
 - All stainless steel front, countertop, sides and back.
 - Interior - attractive, clear aluminum sides and top, coved corners and stainless steel floor.
 - One piece formed construction backsplash prevents bacteria and food particles from being trapped underneath as with other two piece worktop units.
 - 360° circular airflow for uniform product cooling.
 - Adjustable, heavy-duty, PVC-coated wire shelves (not available in drawered models).
 - Heavy-duty 16 gauge top and 20 gauge door and drawer fronts.
 - Work surface 36" (915mm) high.
 - Swing doors are self-closing with 90° stay open feature.
 - Accommodates half bun tray rack; applies to only one door of TWT-60-32-HC (18" x 26" sheet pan (458mm x 661mm)) - not included.
 - ADA compliant with 34" (864mm) work surface height available; no charge. (models -27, -36, -48, -60, -72).
 - All production of True models comply with NSF/ANSI standard 7.
 - Self-contained system.
- Drawer Models have...**
- Accommodates one 12" L x 20" W x 8" D (305mm x 508mm x 204mm) full size pan or two 1/2 pans or three 1/3 pans per drawer. (48" (1,220mm) models accommodate one 12" L x 18" W x 6" D (305mm x 408mm x 153mm) food storage box or one 1/3 size and one 1/2 size pan per drawer; not included).
 - Door/drawer combination models require customer to designate door/drawer orientation.



TWT™ DEEP WORKTOP FREEZERS ~SPEC3 SERIES

| Model | Door/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---------------------|--------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TWT-44F-HC~SPEC3 | 1/0 | 2 | ½ | 5.8 | 320 (146) | 44¾ x 32¼ x 33¼ | 1138 x 820 x 845 |
| TWT-60-32F-HC~SPEC3 | 2/0 | 4 | ½ | 5.8 | 415 (189) | 60¼ x 32¼ x 33¼ | 1531 x 820 x 845 |
| TWT-67F-HC~SPEC3 | 2/0 | 4 | ½ | 5.8 | 440 (200) | 67¼ x 32¼ x 33¼ | 1709 x 820 x 845 |

† Depth does not include 1½" (39 mm) for door handles.

† Depth does not include 1" (26mm) for rear bumpers.

* Height does not include 6¼" (159mm) for castors or 6" (153mm) for optional legs.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



AMERICAN DISABILITY ACT (ADA) COMPLIANT PACKAGES

Solid Doors & Drawers



ADA models feature 3" (77mm) diameter castors


TWT-48-HC

Features/Benefits

- True worktop units are designed to accommodate American Disabilities Act (ADA) requirements.
- ADA Compliant models have 3" (127mm) castors
- ADA Compliant models have 34" (864mm) counter heights.


True Worktop Units Are Designed To Accommodate American Disabilities Act (ADA) Requirements.

PLAN VIEW COMPARISON

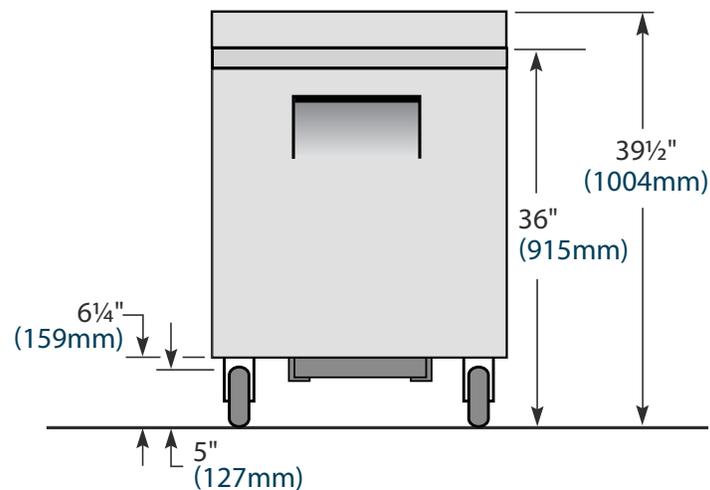

Standard

36" (915mm) Height

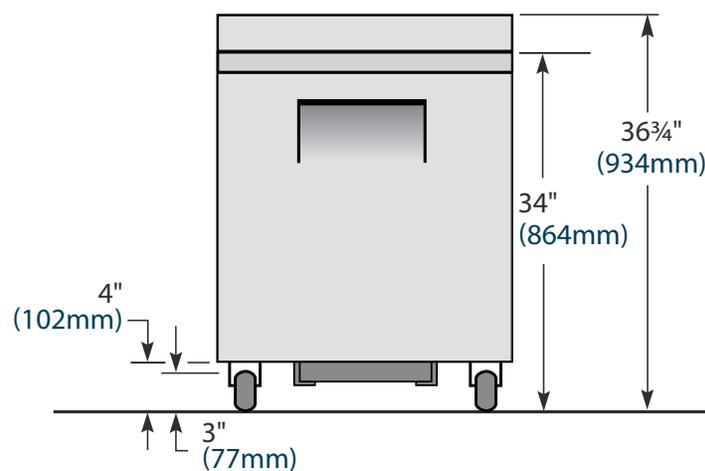

ADA Compliant

34" (864mm) Height



CHEF BASE REFRIGERATION



High-performance chef base cabinets are developed to increase productivity and kitchen workflow. Each provides an ideal work surface for charbroiling, grilling, and frying while providing convenient refrigerated space underneath, accessible with gliding drawers that accommodate multiple-size food pans. Durability is delivered with one-piece cabinet construction, stainless steel exterior, and an aluminum back.



CHEF BASE & CHEF BASE ~SPEC3 SERIES REFRIGERATORS *Solid Drawers*



TRCB-52-60-HC



TRCB-79-HC



TRCB-82-86-HC-SPEC3

Features/Benefits

- Refrigerators maintain cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Automatic defrost system on freezer models time-initiated, time-terminated.
- All stainless steel front, top and sides.
- Interior - attractive, clear aluminum liner. Stainless steel floor with covered corners.
- Chef base top is made of one-piece heavy-duty, 18 gauge, reinforced stainless steel with drip guard (16 gauge tops available for additional charge). True's drip resistant "V" edge protects against spills.
- Strong, durable construction - One section cabinet countertop supports up to 717 pounds (326kg) of equipment. Two section cabinet countertop supports up to 1,084 pounds (492kg) of equipment. Three section cabinet countertop supports up to 2,000 pounds (907kg) of equipment.
- Drawer facings, liners and frames are stainless steel.
- Each drawer is equipped with full perimeter magnetic gaskets (removable for cleaning).
- Accommodates two 12" (305mm)L x 20" (508mm)W x 4" (102mm)D pans per drawer (TRCB-52's, TRCB-96 and left side drawers of TRCB-82's accommodate three 12" (305mm)L x 20" (508mm)W x 4" (102mm)D pans per drawer). TRCB-36 accommodates one 12" (305mm)L x 20" (508mm)W x 4" (102mm)D pan and three 6" (153mm)L x 6" (153mm)W x 4" (102mm)D pans per drawer. Pans not included.
- One, heavy gauge, removable, stainless steel pan divider per drawer (two pan dividers per drawer standard on TRCB-52's, TRCB-96 and left side drawers of TRCB-82's).
- TRCB-52-60, TRCB-79-86, TRCB-82-84 & TRCB-82-86 feature extended heavy-duty top for additional equipment space.
- All TRCB units are available with a flat top option (no marine edge) at no extra charge when unit is ordered with option (lead time may apply).
- Drawer locks available for all units for additional charge.



TRCB™ CHEF BASE REFRIGERATORS

| Model | Drawers | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---------------------|---------|----|------|-------------------------|---------------------------------|---------------------------------|
| WITH DRAWERS | | | | | | |
| TRCB-36-HC | 2 | ¼ | 2.4 | 250 (113) | 36¾ x 32½ x 20½ | 924 x 816 x 520 |
| TRCB-48-HC | 2 | ¼ | 2.4 | 325 (148) | 48¾ x 32½ x 20½ | 1229 x 816 x 520 |
| TRCB-52-HC | 2 | ¼ | 2.4 | 350 (159) | 51¾ x 32½ x 20½ | 1318 x 816 x 520 |
| TRCB-52-60-HC | 2 | ¼ | 2.4 | 370 (168) | 60 x 32½ x 20½ | 1524 x 816 x 520 |
| TRCB-72-HC | 4 | ½ | 4.4 | 435 (198) | 72¾ x 32½ x 20½ | 1839 x 816 x 520 |
| TRCB-79-HC | 4 | ½ | 4.4 | 495 (225) | 79¼ x 30½ x 20½ | 2013 x 775 x 520 |
| TRCB-79-86-HC | 4 | ½ | 4.4 | 490 (223) | 86¼ x 30½ x 20½ | 2191 x 775 x 520 |
| TRCB-82-HC | 4 | ½ | 4.4 | 475 (215) | 82¾ x 32½ x 20½ | 2093 x 816 x 520 |
| TRCB-82-84-HC | 4 | ½ | 4.4 | 555 (252) | 84 x 32½ x 20½ | 2134 x 816 x 520 |
| TRCB-82-86-HC | 4 | ½ | 4.4 | 495 (225) | 86¼ x 32½ x 20½ | 2191 x 816 x 520 |
| TRCB-96-HC | 4 | ½ | 4.4 | 610 (277) | 95½ x 32½ x 20½ | 2426 x 816 x 520 |
| TRCB-110-HC | 6 | ½ | 4.4 | 695 (316) | 110 x 30½ x 20½ | 2794 x 775 x 520 |

† Depth does not include 1" (26mm) for rear bumpers

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

TRCB™ CHEF BASE REFRIGERATORS ~SPEC3 SERIES

| Model | Drawers | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---------------------|---------|----|------|-------------------------|---------------------------------|---------------------------------|
| WITH DRAWERS | | | | | | |
| TRCB-36-HC~SPEC3 | 2 | ¼ | 2.4 | 250 (113) | 36¾ x 32½ x 20½ | 924 x 816 x 520 |
| TRCB-48-HC~SPEC3 | 2 | ¼ | 2.4 | 325 (148) | 48¾ x 32½ x 20½ | 1229 x 816 x 520 |
| TRCB-52-HC~SPEC3 | 2 | ¼ | 2.4 | 350 (159) | 51¾ x 32½ x 20½ | 1318 x 816 x 520 |
| TRCB-52-60-HC~SPEC3 | 2 | ¼ | 2.4 | 370 (168) | 60 x 32½ x 20½ | 1524 x 816 x 520 |
| TRCB-72-HC~SPEC3 | 4 | ½ | 4.4 | 435 (198) | 72¾ x 32½ x 20½ | 1839 x 816 x 520 |
| TRCB-79-HC~SPEC3 | 4 | ½ | 4.4 | 495 (225) | 79¼ x 30½ x 20½ | 2013 x 775 x 520 |
| TRCB-79-86-HC~SPEC3 | 4 | ½ | 4.4 | 490 (223) | 86¼ x 30½ x 20½ | 2191 x 775 x 520 |
| TRCB-82-HC~SPEC3 | 4 | ½ | 4.4 | 475 (215) | 82¾ x 32½ x 20½ | 2093 x 816 x 520 |
| TRCB-82-84-HC~SPEC3 | 4 | ½ | 4.4 | 555 (252) | 84 x 32½ x 20½ | 2134 x 816 x 520 |
| TRCB-82-86-HC~SPEC3 | 4 | ½ | 4.4 | 495 (225) | 86¼ x 32½ x 20½ | 2191 x 816 x 520 |
| TRCB-96-HC~SPEC3 | 4 | ½ | 4.4 | 610 (277) | 95½ x 32½ x 20½ | 2426 x 816 x 520 |
| TRCB-110-HC~SPEC3 | 6 | ½ | 4.4 | 695 (316) | 110 x 30½ x 20½ | 2794 x 775 x 520 |

† Depth does not include 1½" (39 mm) for door handles.

† Depth does not include 1" (26mm) for rear bumpers

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.

~SPEC3 Models have...

- All stainless steel front, countertop, sides, and back.
- Interior features stainless steel liner and stainless steel floor with coved corners.
- Heavy-duty top and 20 gauge drawer fronts.
- Lifetime-guaranteed heavy duty all metal working spec drawer handles.
- Drawer locks standard.

Recommended Operating Conditions

- Installation of a heat shield is recommended for optimum performance (supplied by others)
- Counter top cooking equipment should be used in conjunction with the manufacturers supplied legs.
- Minimum clearance of 4" required between bottom of cooking equipment heating element and TRCB top. Failure to provide clearance voids manufacturer warranty.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.





MERCHANDISERS



True's merchandiser refrigerators drive high impulse sales with oversized designs and beautiful lighting, creating product excitement and maximizing the selection you can offer at your store. Since 1958, we've been the world's #1 manufacturer in this category.






GLASS DOOR MERCHANTISERS

True's glass door merchandisers are the industry standard in glass door cold storage. With more than 70 models to choose from in a wide variety of sizes, styles, and holding temps, the GDM® is the perfect choice to showcase your refrigerated products for maximum impulse sales.



CONTEMPORARY VISUAL MERCHANDISER REFRIGERATORS Swing Doors

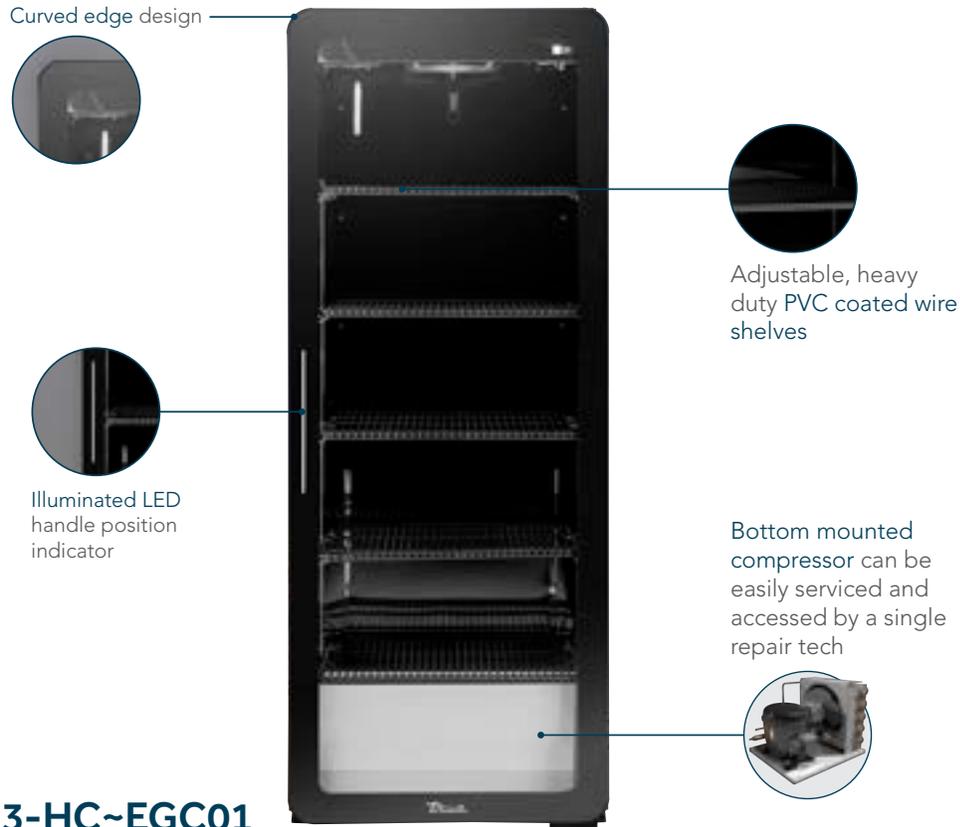

CVM-13-HC~EGC01



CVM-11-HC-EGC01



CVM-20-HC-EGC01



CVM-24-HC-EGC01



CVM-27-HC-EGC01

Features/Benefits

- Refrigerators maintain cold 33°F to 38°F (0.5°C to 3.3°C) temperature.
- True's Contemporary Series is built with durability, stability, and style in mind. Through the series' curved edge design it redefines merchandising with its inspired product displays and increased beverage storage.
- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent.
- Interior - attractive, black aluminum interior liner with stainless steel floor.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Self closing door. Positive seal, torsion type closure system.
- Self-contained system.
- The curved-edged door design has a built-in handle for opening the door from the top or side.
- Exterior Digital Temperature Display (CVM-27-HC~EGC01).
- "Low-E", double pane thermal insulated glass door assembly with mitered plastic channel frame. The latest in energy efficient technology.
- Door sign decal. Variety of decal options available.
- See our website www.truemfg.com for the latest color & sign offerings.
- Optional white or stainless interiors available. Upcharge and lead times will apply.
- Optional stainless exteriors available. Upcharge and lead times will apply.



CVM™ CONTEMPORARY VISUAL MERCHANDISER REFRIGERATORS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|----------------------------------|------------|--------------|-----|------|-------------------------|--|---------------------------------|
| SWING DOORS REFRIGERATORS | | | | | | | |
| CVM-11-HC-EGC01 | 1 | 4 | 1/5 | 2.5 | 210 (95) | 24 ⁷ / ₈ x 22 ⁷ / ₈ x 53 ³ / ₈ | 630 x 581 x 1360 |
| CVM-13-HC-EGC01 | 1 | 5 | 1/5 | 2.5 | 235 (107) | 24 ⁷ / ₈ x 22 ⁷ / ₈ x 63 ³ / ₄ | 630 x 581 x 1619 |
| CVM-20-HC-EGC01 | 1 | 6 | 1/4 | 3.4 | 320 (146) | 27 x 24 ¹ / ₂ x 78 ¹ / ₂ | 686 x 623 x 1994 |
| CVM-24-HC-EGC01 | 1 | 6 | 1/4 | 3.4 | 330 (150) | 27 x 29 ¹ / ₂ x 78 ¹ / ₂ | 686 x 750 x 1994 |
| CVM-27-HC-EGC01 | 1 | 6 | 1/4 | 3.4 | 340 (154) | 30 x 29 ¹ / ₂ x 78 ¹ / ₂ | 762 x 747 x 1994 |


† Depth does not include 5/8" (16mm) for rear mechanical components.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



GLASS DOOR MERCHANDISER REFRIGERATORS

Swing Door

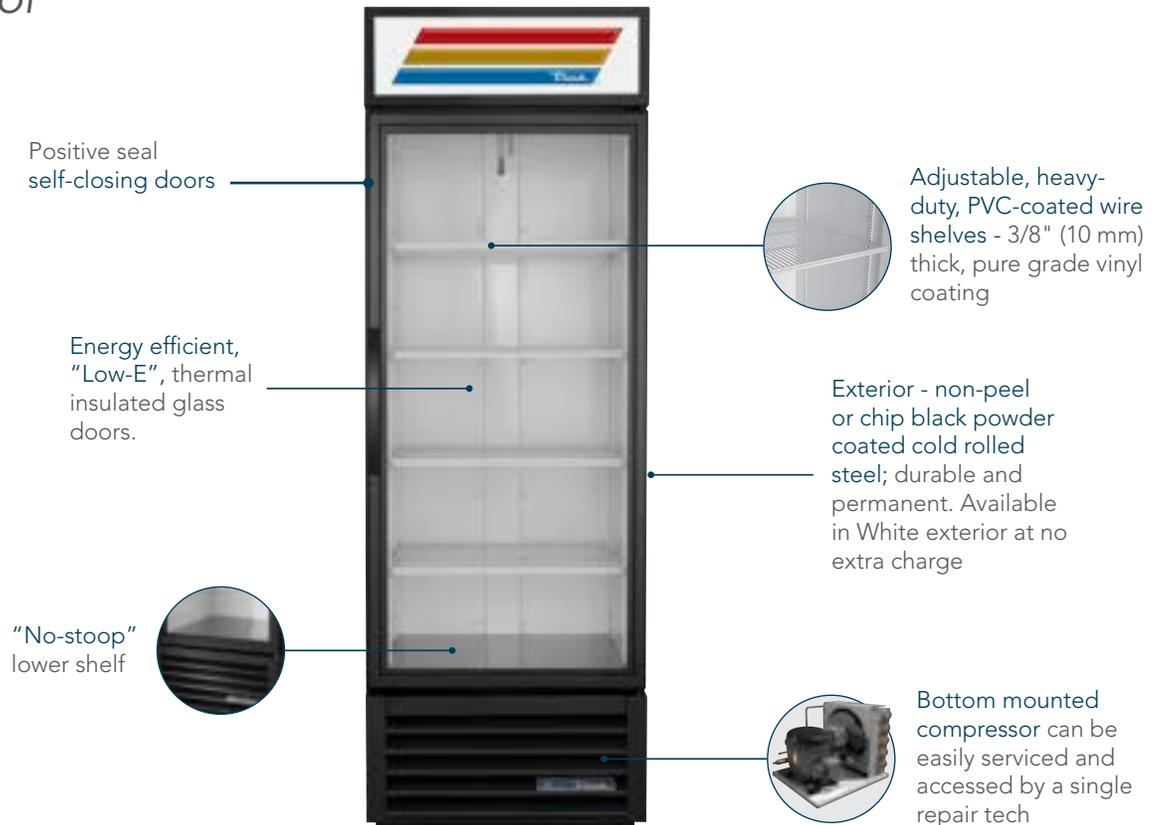

GDM-23-HC~TSL01



GDM-10PT-HC~TSL01



GDM-35SL-RF-HC-LD



GDM-49RL-HC~TSL01



GDM-72-HC~TSL01

Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Interior - attractive, white aluminum with stainless steel floor.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Illuminated sign panel included (decals on GDM-10-HC~TSL01, GDM-10-58-HC~TSL01, GDM-10-58L-HC~TSL01, GDM-10-58R-HC~TSL01, GDM-10PT-HC~TSL01 & GDM-12-HC~TSL01).
- See our website www.truemfg.com for the latest color & sign offerings.
- Available with optional legs or 2½" (64mm) diameter castors. GDM-10-

- HC-LD, GDM-10SSL-LD, & GDM-12-HC-LD available with optional 2½" (64mm) diameter castors only.
- Optional red wine, white wine, or chocolate thermostat available.
- Allows for top storage.

Rear-Load Models...

- GDM-49RL-HC~TSL01 rear doors are black powder coated solid swing doors with recessed handles.

Radius Front Models...

- GDM-35SL-RF-HC-LD standard with recessed handles; optional door locks available.



GDM® GLASS DOOR MERCHANDISER REFRIGERATORS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---------------------------------|-------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SWING DOORS | | | | | | | |
| GDM-10-HC~TSL01 | 1 | 3 | 1/6 | 2.0 | 200 (91) | 24 7/8 x 22 7/8 x 53 3/8 | 632 x 581 x 1356 |
| GDM-10-58-HC~TSL01 | 1 | 3 | 1/6 | 2.0 | 210 (96) | 24 7/8 x 22 7/8 x 58 | 630 x 581 x 1472 |
| GDM-10SSL-HC~TSL01 | 1 | 3 | 1/6 | 2.0 | 170 (77) | 24 7/8 x 18 x 53 1/2 | 632 x 458 x 1359 |
| GDM-12-HC~TSL01 | 1 | 3 | 1/6 | 2.0 | 200 (91) | 24 7/8 x 22 7/8 x 62 3/8 | 632 x 581 x 1585 |
| GDM-15-RTO-HC-LD | 1 | 5 | 1/6 | 2.0 | 250 (114) | 24 7/8 x 24 3/8 x 75 | 632 x 626 x 1905 |
| GDM-23-HC~TSL01 | 1 | 4 | 1/3 | 5.4 | 355 (161) | 27 x 29 7/8 x 78 7/8 | 686 x 759 x 1998 |
| GDM-26-HC~TSL01 | 1 | 5 | 1/3 | 5.4 | 325 (148) | 30 x 29 7/8 x 78 5/8 | 762 x 759 x 1998 |
| GDM-35-HC~TSL01 | 2 | 8 | 1/2 | 6.5 | 370 (168) | 39 1/2 x 29 7/8 x 78 5/8 | 1004 x 759 x 1998 |
| GDM-43-HC~TSL01 | 2 | 8 | 1/2 | 6.5 | 410 (186) | 47 1/8 x 29 7/8 x 78 5/8 | 1197 x 759 x 1998 |
| GDM-49-HC~TSL01 | 2 | 8 | 1/2 | 5.8 | 465 (211) | 54 1/8 x 29 7/8 x 78 5/8 | 1375 x 759 x 1998 |
| GDM-72-HC~TSL01 | 3 | 12 | 1/2 | 9.3 | 630 (286) | 78 1/8 x 29 7/8 x 78 5/8 | 1985 x 759 x 1998 |
| PASS-THRU SWING DOORS | | | | | | | |
| GDM-10PT-HC~TSL01 | 1 fr / 1 bk | 3 | 1/6 | 2.2 | 225 (102) | 24 7/8 x 25 1/2 x 53 3/8 | 630 x 648 x 1356 |
| REAR-LOAD SWING DOORS | | | | | | | |
| GDM-49RL-HC~TSL01 | 2 fr / 2 bk | 8 | 1/2 | 7.3 | 555 (252) | 54 1/8 x 32 1/8 x 78 1/2 | 1372 x 814 x 1994 |
| RADIUS FRONT SWING DOORS | | | | | | | |
| GDM-14RF-HC-LD | 2 | 3 | 1/6 | 2.0 | 280 (127) | 30 3/8 x 29 1/4 x 58 | 772 x 743 x 1474 |
| GDM-35SL-RF-HC-LD | 2 | 4 | 1/6 | 3.4 | 275 (125) | 39 3/4 x 24 1/4 x 58 1/8 | 1010 x 616 x 1477 |

† Depth does not include 1 5/8" (42 mm) for door handles.

† Depth does not include 1 5/8" (42 mm) each side for door handles on GDM-10PT-HC~TSL01.

† Depth does not include 1" (26 mm) for rear bumper on GDM-10-HC~TSL01, GDM-10-58-HC~TSL01, GDM-10SSL-HC~TSL01 & GDM-12-HC~TSL01.

GDM® EXTERIOR OPTIONS

White



Stainless Steel*



Stainless Steel*



Black*



note: For standard swing and slide door models only.

*Upcharges apply for Stainless Steel Exterior and Stainless Steel & Black Interiors. Contact Factory for more information.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



GLASS DOOR FREEZER & ICE MERCHANTISERS

Swing Door

Positive seal self-closing doors

Adjustable, PVC-coated wire shelves

Capacity:
GDIM-26NT-HC~TSL01 holds 54 eight pound bags
GDIM-49NT-HC~TSL01 holds 117 eight pound bags

Allows for top storage

Standard backguard and floor rack improve airflow. "No-stoop" lower shelf

Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent. Available in White exterior at no extra charge

Bottom mounted compressor can be easily serviced and accessed by a single repair tech

GDM-23F-HC~TSL01 **GDIM-26NT-HC~TSL01**



Features/Benefits

- Maintains cold -10°F (-23.3°C) product temperatures for storage of frozen food and ice cream.
 - Automatic defrost system time-initiated, temperature-terminated (GDM-07F-HC~TSL01 time-initiated, time-terminated).
 - Automatic evaporator fan motor delay during defrost cycle.
 - Large evaporator and coil heater permit short defrost cycle.
 - Interior - attractive, white aluminum with stainless steel floor.
 - LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
 - Energy efficient, triple pane, thermal insulated glass doors.
 - Illuminated sign panel included
 - See our website www.truemfg.com for the latest color & sign offerings.
 - Self-contained system, no plumbing required.
 - Available with optional legs or 2½" (64mm) diameter castors. (legs not available on GDM-10F-HC~TSL01 & GDM-12F-HC~TSL01; 2½" (64mm) castors not available on GDM-07F-HC~TSL01). GDM-07F-HC~TSL01 standard with 2½" (64mm) legs; leg levelers standard for all other models shown.
 - Optional black or stainless interiors available. Upcharge and lead times will apply.
 - Optional stainless exteriors available. Upcharge and lead times will apply.
- GDIM models have...**
- Holds 20°F to 25°F (-6.7°C to -3.9°C).
 - Anti-fog film adhered to the glass pane to minimize condensation build-up.
 - Minimum wattage heater in cabinet frame and doors.



GDM® GLASS DOOR MERCHANDISER FREEZERS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------|------------|--------------|-------|------|-------------------------|---------------------------------|---------------------------------|
| SWING DOORS | | | | | | | |
| GDM-07F-HC~TSL01 | 1 | 3 | ¼ | 2.8 | 195 (89) | 24⅞ x 24⅝ x 39⅞ | 613 x 626 x 1013 |
| GDM-10F-HC~TSL01 | 1 | 3 | ½ | 4.5 | 235 (107) | 24⅞ x 22⅞ x 53⅜ | 632 x 581 x 1356 |
| GDM-12F-HC~TSL01 | 1 | 3 | ½ | 4.5 | 255 (116) | 24⅞ x 23⅜ x 62⅜ | 632 x 594 x 1585 |
| GDM-23F-HC~TSL01 | 1 | 4 | ½ | 4.4 | 355 (162) | 27 x 29⅞ x 78⅞ | 686 x 759 x 1998 |
| GDM-26F-HC~TSL01 | 1 | 4 | ½ | 4.4 | 340 (155) | 30 x 29⅞ x 78⅞ | 762 x 759 x 1998 |
| GDM-35F~TSL01 | 2 | 8 | ¾ | 7.9 | 440 (200) | 39½ x 29⅞ x 78⅞ | 1004 x 759 x 1998 |
| GDM-43F-HC~TSL01 | 2 | 8 | (2) ½ | 9.5 | 550 (250) | 47⅞ x 29⅞ x 78⅞ | 1197 x 759 x 1998 |
| GDM-49F-HC~TSL01 | 2 | 8 | (2) ½ | 9.5 | 600 (273) | 54⅞ x 29⅞ x 78⅞ | 1375 x 759 x 1998 |
| GDM-72F-HC~TSL01 | 3 | 12 | (2) ¾ | 15.1 | 850 (386) | 78⅞ x 29⅞ x 78⅞ | 1985 x 759 x 1998 |

† Depth does not include 1⅝" (42mm) for door handle.

† Depth does not include 1" (26mm) for rear bumpers on GDM-10F-HC~TSL01 & GDM-12F-HC~TSL01.

note: GDM-49F-HC~TSL01 & GDM-72F-HC~TSL01 are completely pre-wired at the factory and are ready for final connection to a single 115/208-230/60Hz single phase, 20 amp dedicated circuit.

note: GDM-12F-HC-LD height does not include 1" (26mm) for door hinge.

GDIM GLASS DOOR ICE MERCHANDISER

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SWING DOORS | | | | | | | |
| GDIM-26NT-HC~TSL01 | 1 | 1 | ½ | 6.0 | 295 (134) | 30 x 29⅞ x 78⅞ | 762 x 759 x 1998 |
| GDIM-49NT-HC~TSL01 | 2 | 2 | ½ | 7.0 | 455 (207) | 54⅞ x 29⅞ x 78⅞ | 1375 x 759 x 1998 |

† Depth does not include 1⅜" (35 mm) for door handles.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



GLASS DOOR MERCHANDISER REFRIGERATORS

Slide Door



GDM-47-HC-LD



GDM-33-HC-LD



GDM-41-HC-LD



GDM-41SL-HC-LD



GDM-69-HC-LD

Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
 - Interior - attractive, white aluminum with stainless steel floor.
 - LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
 - Illuminated sign panel included
 - See our website www.truemfg.com for the latest color & sign offerings.
 - Self-contained system, no plumbing required.
 - Available with optional legs or 2½" (64mm) diameter castors.
 - Optional red wine, white wine, or chocolate thermostat available.
 - Optional black or stainless interiors available. Upcharge and lead times will apply.
 - Optional stainless exteriors available. Upcharge and lead times will apply.
 - Allows for top storage.
- Rear-Load Models...**
- GDM-47RL-HC~TSL01 rear doors are black powder coated solid swing doors with recessed handles.



GDM® GLASS DOOR MERCHANDISER REFRIGERATORS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|------------------------------|-------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SLIDE DOORS | | | | | | | |
| GDM-33-HC-LD | 2 | 8 | ½ | 6.5 | 370 (168) | 39½ x 29¾ x 78¾ | 1004 x 753 x 1998 |
| GDM-41-HC-LD | 2 | 8 | ½ | 3.9 | 405 (184) | 47½ x 29¾ x 78¾ | 1197 x 753 x 1998 |
| GDM-41SL-HC-LD | 2 | 8 | ½ | 10.8 | 410 (186) | 47½ x 24½ x 78¾ | 1197 x 613 x 1998 |
| GDM-47-HC-LD | 2 | 8 | ½ | 8.5 | 485 (220) | 54½ x 29¾ x 78¾ | 1376 x 757 x 1998 |
| GDM-69-HC-LD | 3 | 12 | ½ | 7.3 | 635 (289) | 78¾ x 29¾ x 78¾ | 1985 x 753 x 1998 |
| REAR-LOAD SLIDE DOORS | | | | | | | |
| GDM-47RL-HC-LD | 2 fr / 2 bk | 8 | ½ | 8.5 | 535 (243) | 54½ x 32½ x 78¾ | 1372 x 816 x 1998 |

† Depth does not include ¾" (10 mm) for door handles.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



GLASS DOOR MERCHANDISER CONVENIENCE STORE & COUNTER-TOP REFRIGERATORS

Swing & Slide Door



GDM-07-HC~TSL01

GDM-41CPT-48-HC-LD



GDM-05-HC~TSL01



GDM-33CPT-54-HC-LD



GDM-10SSL-HC~TSL01



GDM-33SSL-56-HC-LD

Features/Benefits

Convenience Store models have...

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Lower and narrow profile convenience store coolers allow extra visibility throughout store. Makes gondola and center store placement possible.
- Interior - attractive, white aluminum with stainless steel floor.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Energy efficient, "Low-E", thermal insulated glass.
- Door decal included.
- See our website www.truemfg.com for the latest color & sign offerings.
- Available with optional legs or 2½" (64mm) diameter castors. GDM-06-34-HC~TSL01, GDM-10-HC~TSL01, GDM-10SSL-HC~TSL01, GDM-10PT-HC~TSL01 & GDM-12-HC~TSL01 available with optional 2½" (64mm) diameter castors only.
- Self-contained system, no plumbing required.
- Optional black interiors available. Upcharge and lead times will apply.
- Optional stainless exteriors available. Upcharge and lead times will apply.

Counter-Top models have...

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Designed for convenient access, fast service, and attractive display.
- Interior - attractive, white aluminum with stainless steel floor.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Energy efficient, "Low-E", thermal insulated glass.
- Illuminated sign panel - "True Stripe" standard (decal on GDM-07/07-S-HC~TSL01).
- See our website www.truemfg.com for the latest color & sign offerings.
- Energy efficient - no heater wires or electric condensate pans are required that offset refrigeration.
- GDM-07/7-S-HC~TSL01 are standard with 2½" (64mm) legs; leg levelers standard for all other models shown.
- GDM-05/05-S/05PT/05PT-S-HC~TSL01 & GDM-07/7-S-HC~TSL01 available with optional 4" legs. GDM-06-34-HC~TSL01 available with optional 2½" (64mm) castors.
- Self-contained system, no plumbing required.
- Optional black interiors available. Upcharge and lead times will apply.



GDM® GLASS DOOR MERCHANDISER CONVENIENCE STORE REFRIGERATORS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|-------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| LOWER HEIGHT & STANDARD DEPTH SLIDE DOORS | | | | | | | |
| GDM-41C-48-HC-LD | 2 | 6 | ½ | 3.4 | 325 (148) | 48 x 24½ x 48 | 1220 x 613 x 1220 |
| LOWER HEIGHT & NARROW DEPTH SLIDE DOORS | | | | | | | |
| GDM-33SSL-56-HC-LD | 2 | 4 | ½ | 3.0 | 235 (107) | 36 x 18 x 56 | 915 x 458 x 1423 |
| GDM-41SL-48-HC-LD | 2 | 6 | ¼ | 3.4 | 295 (134) | 46⅞ x 21 x 47¾ | 1191 x 534 x 1213 |
| GDM-41SL-54-HC-LD | 2 | 6 | ¼ | 3.8 | 295 (134) | 47⅞ x 21 x 54⅞ | 1197 x 534 x 1375 |
| GDM-41SL-60-HC-LD | 2 | 6 | ½ | 3.8 | 345 (157) | 47⅞ x 21 x 59⅞ | 1197 x 534 x 1521 |
| LOWER HEIGHT & NARROW DEPTH, FAST LANE, PASS-THRU SLIDE DOORS | | | | | | | |
| GDM-33CPT-54-HC-LD | 2 fr / 2 bk | 3 | ½ | 2.0 | 360 (164) | 39½ x 24½ x 54⅞ | 1004 x 613 x 1375 |
| GDM-41CPT-48-HC-LD | 2 fr / 2 bk | 6 | ½ | 2.0 | 394 (179) | 48 x 24½ x 48 | 1220 x 613 x 1220 |
| LOWER HEIGHT – END OF AISLE MERCHANDISER | | | | | | | |
| GDM-08-HC~TSL01 | 1 | 3 | ½ | 1.7 | 180 (82) | 23½ x 23 x 48 | 594 x 583 x 1219 |
| GDM-10-HC~TSL01 | 1 | 3 | ½ | 2.0 | 200 (91) | 24⅞ x 22⅞ x 53⅞ | 632 x 581 x 1356 |
| GDM-10SSL-HC~TSL01 | 1 | 3 | ½ | 2.0 | 170 (77) | 24⅞ x 18 x 53½ | 632 x 458 x 1359 |
| GDM-10PT-HC~TSL01 | 1 fr / 1 bk | 3 | ½ | 2.2 | 225 (102) | 24⅞ x 25½ x 53⅞ | 630 x 648 x 1356 |

† Depth does not include 1⅜" (35mm) for handle on swing door models, (GDM-10PT-HC~TSL01 has handles front & back); or ⅞" (23mm) on slide door models (GDM-33CPT~TSL01 & GDM-33CPT-54~TSL01 has handles front and back).

† Depth does not include 1" (26mm) for rear bumpers on GDM-10-HC~TSL01 & GDM-10SSL~TSL01.

GDM® GLASS DOOR MERCHANDISER COUNTER-TOP REFRIGERATORS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|-------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| BLACK EXTERIOR SWING DOORS | | | | | | | |
| GDM-05-HC~TSL01 | 1 | 2 | ½ | 2.7 | 155 (71) | 24 x 23⅞ x 36¼ | 608 x 592 x 919 |
| GDM-06-34-HC~TSL01 | 1 | 3 | ⅓ | 1.6 | 175 (80) | 20½ x 26⅞ x 33½ | 519 x 670 x 850 |
| GDM-07-HC~TSL01 | 1 | 3 | ½ | 1.9 | 180 (82) | 24⅞ x 24⅞ x 39⅞ | 613 x 626 x 1013 |
| GDM-08-HC~TSL01 | 1 | 3 | ½ | 1.7 | 180 (82) | 23½ x 23 x 48 | 594 x 583 x 1219 |
| GDM-09-SQ-HC-LD | 2 | 3 | ½ | 1.9 | 230 (105) | 36 x 22⅞ x 40 | 913 x 567 x 1014 |
| BLACK EXTERIOR SWING DOORS FRAMED GLASS | | | | | | | |
| GDM-05-HC~FGD01 | 1 | 2 | ½ | 2.7 | 155 (71) | 24 x 23⅞ x 36¼ | 608 x 592 x 919 |
| STAINLESS STEEL EXTERIOR SWING DOORS | | | | | | | |
| GDM-05-S-HC~TSL01 | 1 | 2 | ½ | 2.7 | 155 (71) | 24 x 23⅞ x 36¼ | 608 x 592 x 919 |
| GDM-07-S-HC~TSL01 | 1 | 3 | ½ | 1.9 | 195 (89) | 24⅞ x 24⅞ x 39⅞ | 613 x 626 x 1013 |
| GDM-09-SQ-S-HC-LD | 2 | 3 | ½ | 1.9 | 230 (105) | 36 x 22⅞ x 40 | 913 x 567 x 1014 |
| STAINLESS STEEL EXTERIOR SWING DOORS FRAMED GLASS | | | | | | | |
| GDM-05-S-HC~FGD01 | 1 | 2 | ½ | 2.7 | 155 (71) | 24 x 23⅞ x 36¼ | 608 x 592 x 919 |
| PASS-THRU BLACK EXTERIOR SWING DOORS | | | | | | | |
| GDM-05PT-HC~TSL01 | 1 fr / 1 bk | 2 | ½ | 2.7 | 165 (75) | 24 x 23⅞ x 36¼ | 608 x 600 x 919 |
| PASS-THRU STAINLESS STEEL EXTERIOR SWING DOORS | | | | | | | |
| GDM-05PT-S-HC~TSL01 | 1 fr / 1 bk | 2 | ½ | 2.7 | 165 (75) | 24 x 23⅞ x 36¼ | 608 x 600 x 919 |
| BLACK EXTERIOR SWING DOORS EXTENDED TOP | | | | | | | |
| GDM-06-34-HC~TSL01-EXT TOP | 1 | 3 | ½ | 1.6 | 175 (80) | 20¾ x 26⅞ x 33⅞ | 525 x 671 x 852 |
| STAINLESS STEEL EXTERIOR SLIDE DOORS | | | | | | | |
| TSD-09G-HC-LD | 2 | 3 | ½ | 1.9 | 220 (100) | 36 x 21 x 35⅞ | 913 x 532 x 911 |


† Depth does not include 1⅝" (42mm) for handle on swing door models (GDM-05PT-HC~TSL01/05PT-S-HC~TSL01 (front and back) or ¾" (20mm) on slide door models.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



GLASS END & GLASS FOUR SIDED MERCHANDISERS

Swing Door

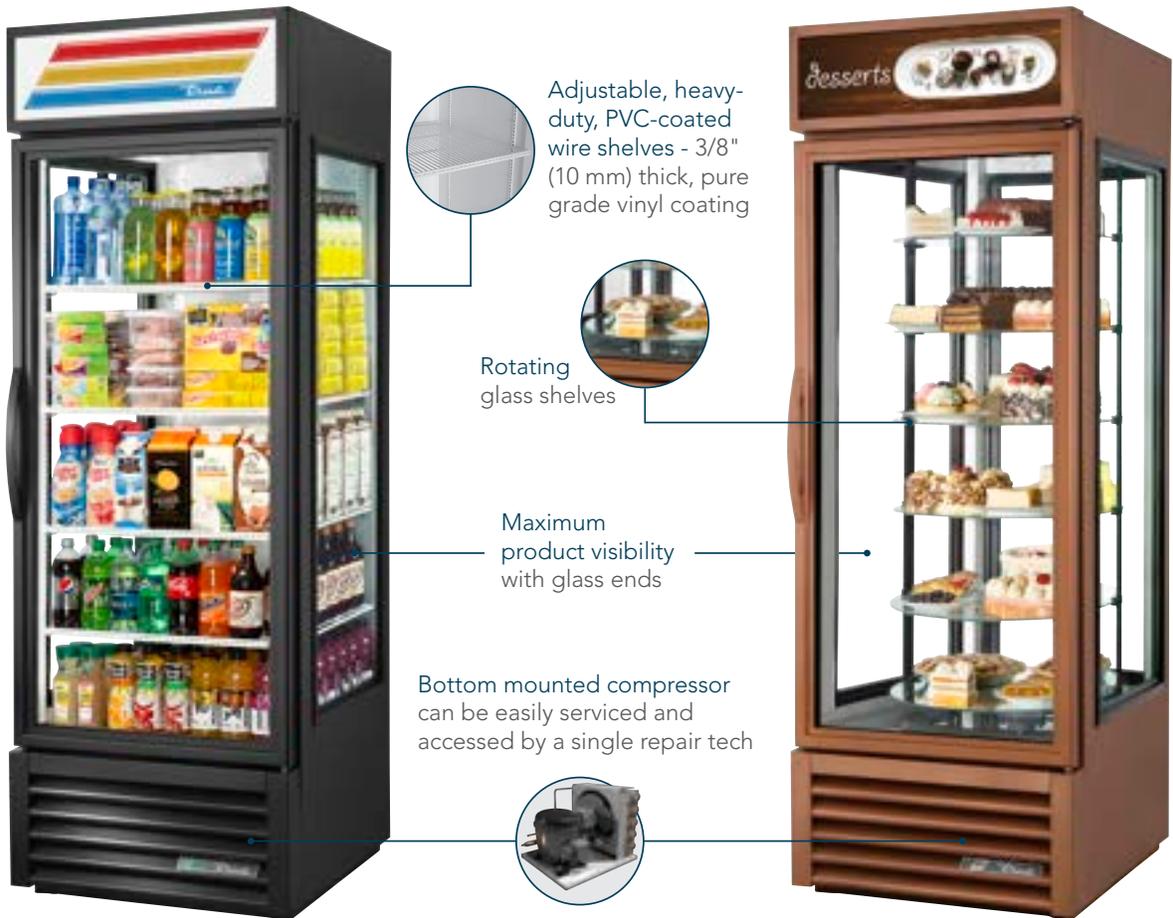

GEM-23-HC~TSL01

G4SM-23RGS~TSL01

Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
 - G4SM: Exterior - attractive, high-luster copper powder coated finish. Available in Black or White exterior at no extra charge.
 - Interior - attractive, white aluminum with stainless steel floor.
 - LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
 - Energy efficient, "Low-E", thermal insulated glass.
 - Illuminated 4-color process sign panel included.
 - See our website www.truemfg.com for the latest color & sign offerings.
 - Self-contained system, no plumbing required.
 - Allows for top storage.
 - "No-stoop", lower shelf.
 - Optional black interiors available. Upcharge and lead times will apply.
 - Optional stainless exteriors available. Upcharge and lead times will apply.
- Glass End Merchandiser models have...**
- Exterior - durable and permanent non-peel or chip black powder coated cold rolled steel. Available in White exterior at no extra charge.
 - Optional black interiors available. Upcharge and lead times will apply.



GEM GLASS END MERCHANDISERS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------|------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SWING DOORS | | | | | | | |
| GEM-23-HC~TSL01 | 1 | 4 | 1/3 | 5.4 | 335 (152) | 27½ x 29¾ x 78¾ | 699 x 759 x 1998 |

† Depth does not include 1¾" (35mm) for door handle on swing door models.

G4SM GLASS FOUR SIDED MERCHANDISER REFRIGERATORS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-----------------------------|------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SWING DOORS | | | | | | | |
| G4SM-23-HC~TSL01 | 1 | 4 | 1/3 | 5.4 | 355 (162) | 27½ x 30¾ x 78¾ | 699 x 766 x 1998 |
| G4SM-23PT-HC~TSL01 | 2 | 4 | 1/3 | 5.4 | 375 (171) | 27½ x 32¾ x 78¾ | 699 x 832 x 1998 |
| ROTATING GLASS SHELF | | | | | | | |
| G4SM-23RGS~TSL01 | 1 | 6 | 1/4 | 2.4 | 385 (175) | 27½ x 30¾ x 78¾ | 699 x 766 x 1998 |

† Depth does not include 1¾" (35mm) for door handles (rear load and pass thru's have handles front and back).
 note: G4SM-23RGS~TSL01 has five glass shelves and one mirrored shelf (positioned on bottom).

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



*Oversized and balanced, environmentally-friendly (134A) refrigeration on G4SM-23RGS~TSL01.

GLASS DOOR & GLASS FOUR SIDED FLORAL CASES

Swing & Slide Doors



GDM-23FC-HC~TSL01



GDM-12FC-HC~TSL01



G4SM-23FC-HC~TSL01



GDM-47FC-HC-LD



GDM-69FC-HC-LD

Features/Benefits

- Designed to hold 35°F (1.7°C).
- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent. Available in White exterior at no extra charge.
- Interior - attractive, black aluminum for vivid contrast and dramatic display of flowers. Non peel or chip interior - stainless steel floor.
- Baffled airflow - blossom supporting, correct temperature and humidity for longer shelf life of fresh flowers.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Energy efficient, "Low-E", thermal insulated glass.
- Mirrored interior backs available.
- Illuminated sign panel included (decal on GDM-10-HC~TSL01,

- GDM-10-58-HC~TSL01 GDM-10SSL-HC~TSL01, GDM-10PT-HC~TSL01 & GDM-12-HC~TSL01).
- See our website www.truemfg.com for the latest color & sign offerings.
- Self-contained system, no plumbing required.
- Available with optional legs or 2½" (64mm) diameter castors. GDM-12FC-HC~TSL01 available with optional 2½" (64mm) diameter castors only.
- Allows for top storage.
- Optional stainless interiors available. Upcharge and lead times will apply.
- Optional stainless exteriors available. Upcharge and lead times will apply.
- Optional copper exterior available on G4SM-23FC-HC~TSL01 only.



GDM® GLASS DOOR MERCHANDISER FLORAL CASES

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------|------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SWING DOORS | | | | | | | |
| GDM-12FC-HC~TSL01 | 1 | 2 | 1/6 | 2.0 | 225 (106) | 24 7/8 x 23 1/8 x 62 3/8 | 632 x 588 x 1585 |
| GDM-23FC-HC~TSL01 | 1 | 2 | 1/3 | 5.4 | 300 (137) | 27 x 29 7/8 x 78 5/8 | 686 x 759 x 1998 |
| GDM-49FC-HC~TSL01 | 2 | 4 | 1/2 | 4.9 | 465 (211) | 54 1/8 x 29 7/8 x 78 5/8 | 1375 x 759 x 1998 |
| GDM-72FC-HC~TSL01 | 3 | 6 | 1/2 | 9.3 | 630 (286) | 78 1/8 x 29 7/8 x 78 5/8 | 1985 x 759 x 1998 |
| SLIDE DOORS | | | | | | | |
| GDM-47-FC-LD | 2 | 4 | 1/2 | 8.5 | 470 (214) | 54 1/8 x 29 7/8 x 78 5/8 | 1375 x 753 x 1998 |
| GDM-69-FC-HC-LD | 3 | 6 | 1/2 | 7.3 | 645 (293) | 78 1/8 x 29 7/8 x 78 5/8 | 1985 x 753 x 1998 |

† Depth does not include 1 3/8" (42mm) for door handle on swing door models; or 3/8" (10mm) for slide door models.

† Depth does not include 1" (26mm) for rear bumpers on GDM-12FC-HC~TSL01.

G4SM GLASS FOUR SIDED MERCHANDISER FLORAL CASES

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------|------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SWING DOORS | | | | | | | |
| G4SM-23FC-HC~TSL01 | 1 | 2 | 1/3 | 5.4 | 375 (171) | 27 1/2 x 30 1/8 x 78 5/8 | 699 x 766 x 1998 |

† Depth does not include 1 3/8" (42mm) for door handle.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



GLASS DOOR WINE MERCHANDISERS

Swing & Slide Doors



GDM-23W-HC~TSL01

Features/Benefits

- Designed to hold 33°F to 38°F (0.5°C to 3.3°C).
- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent. Available in White exterior at no extra charge.
- Interior - attractive, black aluminum for vivid contrast and dramatic display of flowers. Non peel or chip interior - stainless steel floor.
- Standard with mirrored back.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Energy efficient, "Low-E", thermal insulated glass.
- Illuminated sign panel included.
- GDM-23W-HC~TSL01 is standard with locks.
- See our website www.truemfg.com for the latest color & sign offerings.
- Self-contained system, no plumbing required.
- Available with optional legs or 2½" (64mm) diameter castors.
- Optional red wine, white wine, or chocolate wine thermostat available.
- Optional stainless interiors available. Upcharge and lead times will apply.
- Optional stainless and copper exteriors available. Upcharge and lead times will apply.

GDM® GLASS DOOR WINE MERCHANDISERS

| Model | # of Doors | # of Shelves* | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------|------------|---------------|-----|------|-------------------------|--------------------------------|---------------------------------|
| SWING DOORS | | | | | | | |
| GDM-23W-HC~TSL01 | 1 | 5 | 1/3 | 5.4 | 310 (141) | 27 x 29 7/8 x 78 5/8 | 686 x 759 x 1998 |

† Depth does not include 1 5/8" (42mm) for door handle.

* Shelves include 4 wine shelves and 1 wire shelf.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



GLASS DOOR MERCHANDISER WITH HEALTH SAFETY TIMER *Swing Doors*

Health Safety Timer.
Once the sensor in the cabinet senses that 41°F (5°C) has been exceeded for a continuous 30 minutes, the cabinet door will lock, the display will indicate HST LCK, and the LAE control will beep until silenced



Adjustable, heavy-duty, PVC-coated wire shelves - 3/8" (10 mm) thick, pure grade vinyl coating



Exterior digital temperature control and display



Bottom mounted compressor can be easily serviced and accessed by a single repair tech



GDM-26-HST02-HC~TSL01



GDM-26-HST02-HC~TSL01



GDM-23F-HST-HC~TSL01

Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent. Available in White exterior at no extra charge.
- Interior - attractive, white aluminum with stainless steel floor.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Positive seal self-closing swing doors.
- Energy efficient, "Low-E", thermal insulated glass.
- Self-contained system, no plumbing required.
- Illuminated sign panel included
- See our website www.truemfg.com for the latest color & sign offerings.
- Available with optional legs or 2½" (64mm) diameter castors.
- Optional black or stainless interiors available. Upcharge and lead times will apply.



GDM® GLASS DOOR MERCHANDISER WITH HEALTH SAFETY TIMER

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|----------------------------------|------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SWING DOORS REFRIGERATORS | | | | | | | |
| GDM-23-HST02-HC~TSL01 | 1 | 4 | 1/3 | 2.6 | 295 (134) | 27 1/4 x 29 3/4 x 78 1/2 | 691 x 754 x 1994 |
| GDM-26-HST02-HC~TSL01 | 1 | 5 | 1/3 | 5.4 | 320 (145) | 30 1/4 x 29 3/4 x 78 1/2 | 762 x 754 x 1998 |
| SWING DOORS FREEZERS | | | | | | | |
| GDM-23F-HST-HC~TSL01 | 1 | 4 | 1 | 9.5 | 380 (173) | 27 x 29 7/8 x 78 5/8 | 686 x 759 x 1998 |
| GDM-26F-HST-HC~TSL01 | 1 | 4 | 1 | 9.5 | 390 (177) | 30 x 29 7/8 x 78 5/8 | 762 x 759 x 1998 |

† Depth does not include 1 3/8" (42mm) for door handles.



An electronic monitoring system deploys lock if unsafe temperatures last longer than the allotted time.

IMPROVED! The Low Profile integrated lock design allows the cabinet to be built-in or banked next to other cabinets. The (HST) locking system can be unlocked and locked with a password through the electronic temperature control display.

HST02 MODELS ONLY



The Door Lock is activated if temperatures rise over 41°F (5°C) for 30 minutes (refrigerators). 0°F (-18°C) for 30 minutes (freezers).



Battery backup power supply ensures the lock will continue to function during loss of power.



Audible alarm sounds, along with a visual signal display when lock is triggered to inform staff.



IMPROVED! Door locks immediately upon power failure unless otherwise programmed.

HST02 MODELS ONLY



PLEASE NOTE: Improved features of the HST02 models are available at this time on refrigerator versions only. Freezer versions (shown left) still come with original controls and HST locking mechanism. Please contact factory for details.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



GLASS DOOR VISUAL MERCHANDISER REFRIGERATORS

Swing Doors



TVM-30-HC~VM03



TVM-48SL-48-HC-VM01



TVM-48SL-54-HC-VM01



TVM-36SL-HC-VM01



TVM-48SL-HC-VM01

Features/Benefits

- Refrigerators maintain cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- True Visual Merchandisers are ideal for in-aisle and end cap refrigeration applications. The improved low profile swing door design eliminates the center mullion. This allows for full product visibility and ease of shopping. The hydrocarbon refrigeration system will save on energy costs compared to that of open air refrigerators found in similar scenarios.
- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent. Available in White exterior at no extra charge.
- Interior - attractive, white aluminum with stainless steel floor.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Positive seal self-closing swing doors.
- Self-contained system, no plumbing required.
- Illuminated sign panel included (decal on TVM-30-HC~VM01, TVM-36SL-HC~VM01, TVM-48SL-48-HC~VM01 & TVM-48SL-54-HC~VM01).
- See our website www.truemfg.com for the latest color & sign offerings.
- Available with optional legs or 2½" (64mm) diameter castors.
- Optional black or stainless interiors available. Upcharge and lead times will apply.
- Optional stainless exteriors available. Upcharge and lead times will apply.



TVM® GLASS DOOR VISUAL MERCHANDISER REFRIGERATORS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---------------------|------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SWING DOORS | | | | | | | |
| TVM-30-HC~VM03 | 2 | 4 | 1/5 | 2.0 | 255 (116) | 307/8 x 24 x 547/8 | 783 x 608 x 1393 |
| TVM-30SL-HC~VM03 | 2 | 4 | 1/5 | 2.0 | 245 (111) | 307/8 x 213/8 x 547/8 | 783 x 540 x 1393 |
| TVM-36SL-HC~VM03 | 2 | 4 | 1/4 | 2.0 | 260 (118) | 36 x 213/8 x 547/8 | 914 x 540 x 1393 |
| TVM-48-HC~VM01 | 2 | 8 | 1/2 | 10.5 | 520 (236) | 471/4 x 297/8 x 783/8 | 1198 x 757 x 1996 |
| TVM-48SL-HC~VM01 | 2 | 8 | 1/2 | 10.8 | 575 (261) | 477/8 x 251/4 x 783/4 | 1197 x 641 x 2000 |
| TVM-48SL-48-HC~VM01 | 2 | 6 | 1/5 | 2.0 | 315 (143) | 467/8 x 21 x 48 | 1190 x 533 x 1217 |
| TVM-48SL-54-HC~VM01 | 2 | 6 | 1/4 | 2.0 | 380 (173) | 477/8 x 21 x 537/8 | 1197 x 533 x 1368 |

† Depth does not include 1 3/4" (45mm) for door handles.

† Depth does not include 1" (26mm) for rear bumpers.


Low profile swing door design eliminates the center mullion, allowing for full product visibility and ease of shopping.



Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



FULL LENGTH MERCHANDISER REFRIGERATORS & FREEZERS Swing Doors

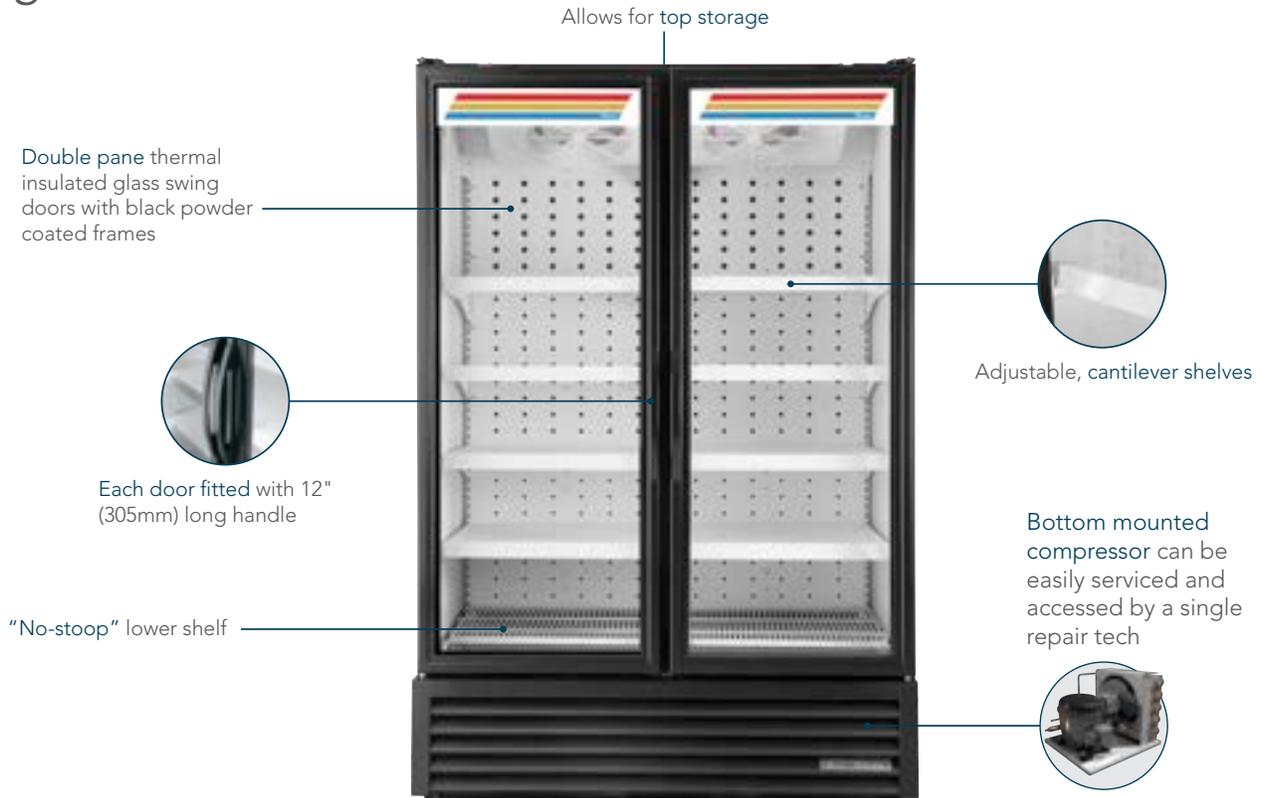

FLM-54~TSL01



FLM-27~TSL01



FLM-54F~TSL01



FLM-81~TSL01

Features/Benefits

- Refrigerators maintain cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures. Freezers maintain cold -10°F (-23.3°C) product temperatures for storage of frozen food and ice cream.
- True Full Length merchandisers feature full height doors for maximum product visibility and have endless case look with a self-contained system.
- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent. Available in White exterior at no extra charge.
- Interior - attractive, white aluminum with stainless steel floor.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Positive seal self-closing swing doors.
- Self-contained system, no plumbing required.
- Door sign decal. Variety of decal options available.
- See our website www.truemfg.com for the latest color & sign offerings.
- Optional black or stainless interiors available. Upcharge and lead times will apply.
- Optional stainless exteriors available. Upcharge and lead times will apply.




FLM™ FULL LENGTH MERCHANDISER REFRIGERATORS & FREEZERS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|----------------------------------|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SWING DOORS REFRIGERATORS | | | | | | | |
| FLM-27~TSL01 | 1 | 4 | ¼ | 2.3 | 355 (161) | 27 x 30¾ x 79 | 686 x 772 x 2007 |
| FLM-54~TSL01 | 2 | 8 | ½ | 6.3 | 625 (284) | 53¾ x 30¾ x 79 | 1369 x 772 x 2007 |
| FLM-81~TSL01 | 3 | 12 | ¾ | 6.3 | 810 (368) | 80¾ x 30¾ x 79 | 2051 x 772 x 2007 |
| SWING DOORS FREEZERS | | | | | | | |
| FLM-27F~TSL01 | 1 | 4 | ¾ | 7.2 | 385 (175) | 27 x 30¾ x 79 | 686 x 772 x 2007 |
| FLM-54F~TSL01 | 2 | 8 | ½ | 13.1 | 725 (329) | 53¾ x 30¾ x 79 | 1369 x 772 x 2007 |
| FLM-81F~TSL01 | 3 | 12 | ¾ | 14.2 | 870 (395) | 80¾ x 30¾ x 79 | 2051 x 772 x 2007 |

† Depth does not include 1½" (42mm) for door handles.

Bankable Units to Create Seamless Look

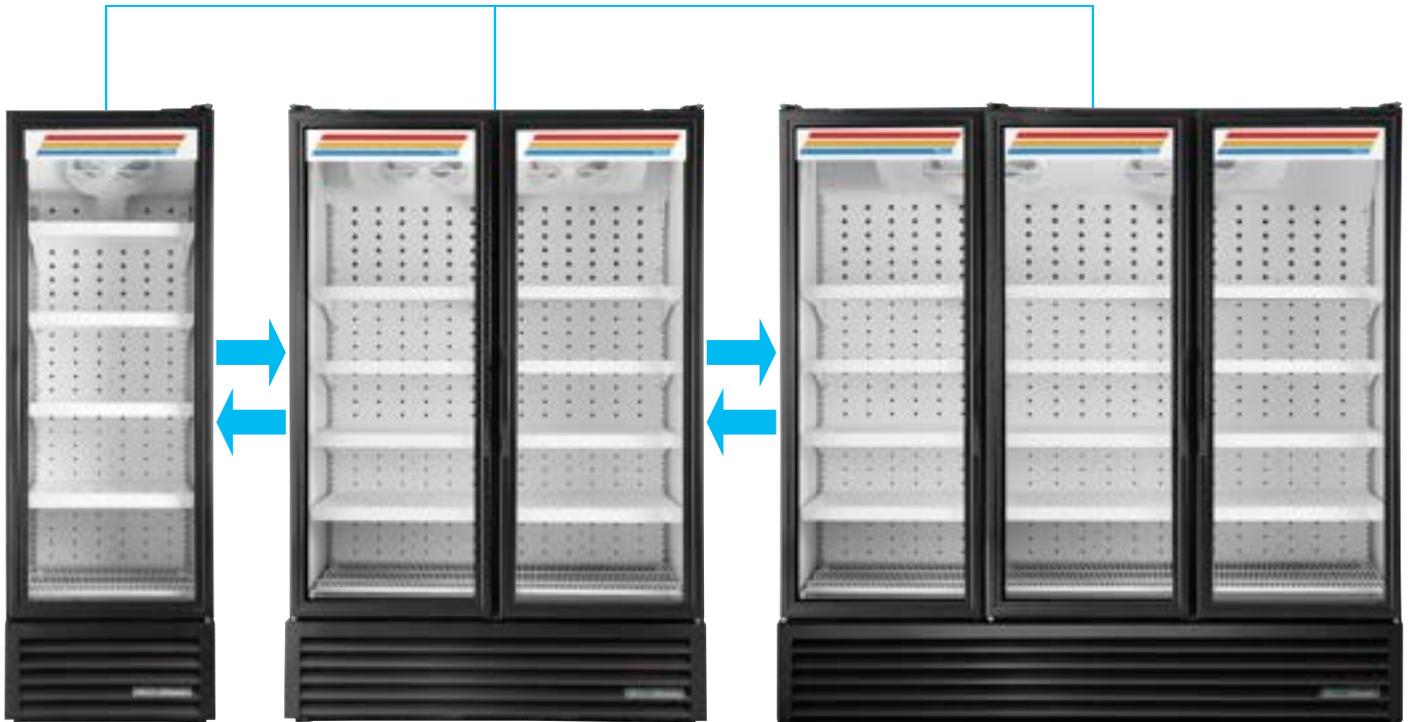



OPEN AIR MERCHANTISERS

Air curtain refrigerators combine large, open-front product displays aimed at maximum attention on merchandising and allow easy access to displayed products resulting in high-impulse sales. These open-air units also provide Industry-leading energy efficiency, durable construction, and dependability in the highest foot-traffic retail spaces.

GRAB-N



OPEN AIR MERCHANDISERS

Solid & Glass Sided




Adjustable, solid white powder coated cantilever shelves. Each shelf equipped with an LED light strip to provide 5 levels of even lighting throughout the cabinet. Cantilever shelving adjustable up to a 15° tilt



GS Models have glass side panels for maximum product visibility

Bottom mounted compressor can be easily serviced and accessed by a single repair tech



TOAM-30GS-HC~NSL01



TOAM-30GS-HC-TSL01
(with night cover)



TOAM-30-HC-NSL01



TOAM-48-HC-TSL01



TOAM-72GS-HC-NSL01

Features/Benefits

- Maintain cold 33°F to 40°F (0.5°C to 4.4°C) product temperatures.
- Large, open front allows easy access to display levels and places maximum attention on merchandising.
- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent.
- Interior - attractive, white aluminum interior liner with stainless steel floor.
- Glass lower front panels.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Illuminated exterior flat profile sign panel included on TSL01 models.
- See our website www.truemfg.com for the latest color & sign offerings.
- Frame rail fitted with leg levelers. Available with optional legs, 2½" (64mm) diameter castors, 4" (102mm) castors, and 5" (127mm) castors.
- Standard with night cover.
- Optional black or stainless interiors available. Upcharge and lead times will apply.
- Optional stainless exteriors available. Upcharge and lead times will apply.
- Drain plumbing hookup recommended. Factory installed condensate pan heater kit available.



TOAM® OPEN AIR MERCHANDISERS

| Model | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|--------------|-------|------|-------------------------|---------------------------------|---------------------------------|
| BLACK EXTERIOR | | | | | | |
| TOAM-30-HC~TSL01 | 4 | ¾ | 9.5 | 365 (166) | 30 x 29½ x 78½ | 762 x 757 x 1994 |
| TOAM-36-HC~TSL01 | 4 | ¾ | 10.2 | 390 (177) | 36 x 29½ x 78½ | 915 x 757 x 1994 |
| TOAM-48-HC~TSL01 ‡ | 4 | (2) ¾ | 7.6 | 540 (245) | 48 x 29½ x 78½ | 1220 x 757 x 1994 |
| TOAM-60-HC~TSL01 ‡ | 4 | (2) ¾ | 7.4 | 580 (263) | 60 x 29½ x 78½ | 1524 x 757 x 1994 |
| TOAM-72-HC~TSL01 ‡ | 8 | (3) ¾ | 14.9 | 750 (340) | 72 x 29½ x 78½ | 1829 x 757 x 1994 |
| BLACK EXTERIOR~NON STANDARD LOOK | | | | | | |
| TOAM-30-HC~NSL01 | 4 | ¾ | 9.5 | 365 (166) | 30 x 29½ x 78½ | 762 x 738 x 1994 |
| TOAM-36-HC~NSL01 | 4 | ¾ | 10.2 | 390 (177) | 36 x 29½ x 78½ | 915 x 738 x 1994 |
| TOAM-48-HC~NSL01 ‡ | 4 | (2) ¾ | 7.6 | 540 (245) | 48 x 29½ x 78½ | 1220 x 738 x 1994 |
| TOAM-60-HC~NSL01 ‡ | 4 | (2) ¾ | 7.4 | 580 (263) | 60 x 29½ x 78½ | 1524 x 738 x 1994 |
| TOAM-72-HC~NSL01 ‡ | 8 | (3) ¾ | 14.9 | 750 (340) | 72 x 29½ x 78½ | 1829 x 738 x 1994 |

‡ Requires 208-230/60 Hz, single phase, NEMA 6-15R.

‡ Requires 208-230/60 Hz, single phase, NEMA 6-20R.

TOAM® OPEN AIR MERCHANDISERS WITH GLASS SIDES

| Model | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|--------------|-------|------|-------------------------|---------------------------------|---------------------------------|
| BLACK EXTERIOR | | | | | | |
| TOAM-30GS-HC~TSL01 | 4 | ¾ | 9.5 | 390 (177) | 30 x 29½ x 78½ | 762 x 757 x 1994 |
| TOAM-36GS-HC~TSL01 | 4 | ¾ | 10.2 | 390 (177) | 36 x 29½ x 78½ | 915 x 757 x 1994 |
| TOAM-48GS-HC~TSL01 ‡ | 4 | (2) ¾ | 7.6 | 540 (245) | 48 x 29½ x 78½ | 1220 x 757 x 1994 |
| TOAM-60-HC~TSL01 ‡ | 4 | (2) ¾ | 7.4 | 580 (263) | 60 x 29½ x 78½ | 1524 x 757 x 1994 |
| TOAM-72GS-HC~TSL01 ‡ | 8 | (3) ¾ | 14.9 | 765 (347) | 72 x 29½ x 78½ | 1829 x 757 x 1994 |
| BLACK EXTERIOR~NON STANDARD LOOK | | | | | | |
| TOAM-30GS-HC~NSL01 | 4 | ¾ | 9.5 | 390 (177) | 30 x 29½ x 78½ | 762 x 738 x 1994 |
| TOAM-36GS-HC~NSL01 | 4 | ¾ | 10.2 | 390 (177) | 36 x 29½ x 78½ | 915 x 738 x 1994 |
| TOAM-48GS-HC~NSL01 ‡ | 4 | (2) ¾ | 7.6 | 540 (245) | 48 x 29½ x 78½ | 1220 x 738 x 1994 |
| TOAM-60-HC~NSL01 ‡ | 4 | (2) ¾ | 7.4 | 580 (263) | 60 x 29½ x 78½ | 1524 x 738 x 1994 |
| TOAM-72GS-HC~NSL01 ‡ | 8 | (3) ¾ | 14.9 | 765 (347) | 72 x 29½ x 78½ | 1829 x 738 x 1994 |

‡ Requires 208-230/60 Hz, single phase, NEMA 6-15R.

‡ Requires 208-230/60 Hz, single phase, NEMA 6-20R.

Recommended Operating Conditions

- Designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity.
- Units should not be installed near HVAC vents, fans or doorways that will disrupt the air curtain and compromise the function of the cabinet. Units should not be installed in direct sunlight.
- Models will run most efficiently when completely loaded with product.
- Drain plumbing hookup recommended. Factory installed condensate pan heater kit available if there is no access to drain plumbing.
- Please be advised Open Air Merchandisers are substantially louder than standard refrigeration models.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



AIR CURTAIN MERCHANDISERS

Vertical & Horizontal, Solid & Glass Sided



Adjustable, heavy-duty, PVC-coated wire shelves - 3/8" (10mm) thick, pure grade vinyl coating

Bottom mounted compressor can be easily serviced and accessed by a single repair tech



Three (3) level tiered stainless steel floor.



TAC-14GS-HC-LD

THAC-36-HC-LD



THAC-48S-HC-LD



THAC-60-HC-LD (White Exterior)



THAC-60-HC-LD

Features/Benefits

TAC-14GS-HC-LD model has...

- Holds 35°F to 40°F (1.6°C to 4.4°C) product temperatures.
- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent. Available in White exterior at no extra charge.
- Interior - attractive, white aluminum with stainless steel floor and deck pans. Available with black aluminum interior (upcharge applies); standard with black shelves.
- Optional organizers for 8 oz., 10 oz. & 12 oz. bottles.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Leg levelers standard. Available with optional 4" (102mm) castors.
- Self-contained system.

THAC models have...

- Holds 35°F to 40°F (1.6°C to 4.4°C) product temperatures.
- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent. Available in White exterior at no extra charge. Stainless steel exterior available (upcharge applies).
- Interior - attractive, exterior matching aluminum liner with stainless steel floor.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Leg levelers standard.
- Self-contained system.



TAC® VERTICAL AIR CURTAIN MERCHANDISERS WITH GLASS SIDES

| Model | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W* D† H (in) | Cabinet Dimensions W* D† H (mm) |
|----------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| BLACK EXTERIOR | | | | | | |
| TAC-14GS-HC-LD | 3 | ¾ | 7.0 | 280 (127) | 30¼ x 32½ x 56¾ | 769 x 816 x 1432 |

THAC™ HORIZONTAL AIR CURTAIN MERCHANDISERS

| Model | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W* D† H (in) | Cabinet Dimensions W* D† H (mm) |
|----------------------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| BLACK or WHITE EXTERIOR | | | | | | |
| THAC-36-HC-LD | 3 | ⅓ | 5.3 | 310 (141) | 36½ x 30½ x 43¾ | 918 x 766 x 1102 |
| THAC-48-HC-LD | 3 | ⅓ | 5.3 | 365 (166) | 48½ x 30½ x 43¾ | 1223 x 766 x 1102 |
| THAC-60-HC-LD | 3 | ½ | 7.1 | 410 (186) | 60½ x 30½ x 43¾ | 1528 x 766 x 1102 |
| STAINLESS STEEL EXTERIOR | | | | | | |
| THAC-36-HC-S-LD | 3 | ⅓ | 5.3 | 325 (148) | 36½ x 30½ x 43¾ | 918 x 766 x 1102 |
| THAC-48-HC-S-LD | 3 | ⅓ | 5.3 | 395 (180) | 48½ x 30½ x 43¾ | 1223 x 766 x 1102 |
| THAC-60-HC-S-LD | 3 | ½ | 7.1 | 465 (211) | 60½ x 30½ x 43¾ | 1528 x 766 x 1102 |
| BLACK EXTERIOR "DRY GOODS" | | | | | | |
| THAC-36DG-HC-LD | 5 | ¾ | 5.3 | 480 (218) | 36½ x 30½ x 67¾ | 918 x 766 x 1705 |



THAC-36DG-LD "Dry Goods Area" has...

- Stainless steel frame.
- Two 2-tiered wire shelves.
- LED Lighting located on top and each shelf.
- Sliding rear doors.

Recommended Operating Conditions

- Designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity.
- Units should not be installed near HVAC vents, fans or doorways that will disrupt the air curtain and compromise the function of the cabinet. Units should not be installed in direct sunlight.
- Models will run most efficiently when completely loaded with product.
- Drain plumbing hookup recommended. Factory installed condensate pan heater kit available if there is no access to drain plumbing.
- Please be advised Open Air Merchandisers are substantially louder than standard refrigeration models.

THAC-36DG-HC-LD

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.





RETAIL MERCHANDISERS



Welcoming a new generation of full sized grocery merchandiser, True's Retail Merchandiser (TRM®) is an advanced self-contained cabinet built for large storage capacity and exceptional display. The TRM® refrigeration system is charged and sealed at the factory using R290 refrigeration, a natural, environmentally friendly future proof refrigerant.

TRM® NOMENCLATURE






RETAIL MERCHANDISER REFRIGERATORS - MEDIUM TEMP

Swing Doors

Take advantage of the install flexibility, convenience, and efficiency of this self-contained case. Fit TRM's through doorways, move the case into location, install the compact sealed condensing systems and plug it in. No refrigeration connections or technicians needed for install



Total of 15 (5 per door) adjustable, solid white powder coated cantilever shelves 30W" x 25D"



The True Dynamic Refrigeration Response System® allows for quick product pull down where and when cooling demand is needed

The entire cabinet structure is built using high-density, polyurethane insulation that has zero ozone depletion potential

NSF/ANSI standard 7 for the storage and/or display of packaged products only

TRM2M-NN-BLK-WHT-1BLKLL-4



TRM3M-NN-BLK-WHT-1BLKLLL-4



TRM4M-NN-BLK-BLK-1BLKLLLL-4



TRM5M-YN-BLK-BLK-1BLKLLLLL-4

Features/Benefits

- Refrigerators maintain holding temperatures of 32°F to 41°F (0°C to 5°C).
- True's Retail Merchandiser (TRM) is an advanced self-contained cabinet built for large storage capacity and exceptional product display.
- Available in 2,3, and 4 door models, the TRM's are ideal for multi-door case lineups, end cap placements, and general refrigeration storage applications.
- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent.
- Interior - attractive, white aluminum interior liner with stainless steel floor. Black aluminum interior available.
- Plug-and-play electrical system for seamless installation (No refrigeration tech or electrician needed).
- 4000k color temperature LED interior lighting, provides brilliant lighting throughout the cabinet.
- Self closing door with stay open feature.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.
- "Low-E", double pane thermal insulated glass door.
- Patented True Level leveling systems for a quick install.
- Self-contained factory charged and sealed refrigerator system.
- Viewable glass height of 70" for maximum product display.
- Exterior Digital Temperature Display.
- Unit completely pre-wired at factory and ready for final connection to a 208-240V-1PH-60Hz, cord and plug set included.




TRM® RETAIL MERCHANDISER REFRIGERATORS

| Model | # of Refrigerator Decks* | # of Doors | # of Shelves | HP per Deck | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H (in) | Cabinet Dimensions W D† H (mm) |
|----------------------------------|--------------------------|------------|--------------|-------------|------|-------------------------|--------------------------------|--------------------------------|
| SWING DOORS REFRIGERATORS | | | | | | | | |
| TRM2M-NN-BLK-WHT-1BLKLL-4 | 1 | 2 | 10 | ¾ | 5.3 | 1020 (463) | 67½ x 38⅞ x 102 | 1715 x 988 x 2591 |
| TRM2M-NY-BLK-WHT-1BLKLL-4 | 1 | 2 | 10 | ¾ | 5.3 | 1020 (463) | 67⅞ x 38⅞ x 102 | 1711 x 988 x 2591 |
| TRM2M-YN-BLK-WHT-1BLKLL-4 | 1 | 2 | 10 | ¾ | 5.3 | 1020 (463) | 66⅞ x 38⅞ x 102 | 1685 x 988 x 2591 |
| TRM2M-YY-BLK-WHT-1BLKLL-4 | 1 | 2 | 10 | ¾ | 5.3 | 1020 (463) | 66¼ x 38⅞ x 102 | 1681 x 988 x 2591 |
| TRM3M-NN-BLK-WHT-1BLKLLL-4 | 2 | 3 | 15 | ¾ | 10.6 | 1318 (598) | 98 x 38⅞ x 102 | 2490 x 988 x 2591 |
| TRM3M-NY-BLK-WHT-1BLKLLL-4 | 2 | 3 | 15 | ¾ | 10.6 | 1318 (598) | 97⅞ x 38⅞ x 102 | 2486 x 988 x 2591 |
| TRM3M-YN-BLK-WHT-1BLKLLL-4 | 2 | 3 | 15 | ¾ | 10.6 | 1318 (598) | 96⅞ x 38⅞ x 102 | 2461 x 988 x 2591 |
| TRM3M-YY-BLK-WHT-1BLKLLL-4 | 2 | 3 | 15 | ¾ | 10.6 | 1318 (598) | 96⅞ x 38⅞ x 102 | 2455 x 988 x 2591 |
| TRM4M-NN-BLK-WHT-1BLKLLLL-4 | 2 | 4 | 20 | ¾ | 10.6 | 1760 (799) | 128¾ x 38⅞ x 102 | 3261 x 988 x 2591 |
| TRM4M-NY-BLK-WHT-1BLKLLLL-4 | 2 | 4 | 20 | ¾ | 10.6 | 1760 (799) | 128¼ x 38⅞ x 102 | 3258 x 988 x 2591 |
| TRM4M-YN-BLK-WHT-1BLKLLLL-4 | 2 | 4 | 20 | ¾ | 10.6 | 1760 (799) | 127¼ x 38⅞ x 102 | 3233 x 988 x 2591 |
| TRM4M-YY-BLK-WHT-1BLKLLLL-4 | 2 | 4 | 20 | ¾ | 10.6 | 1760 (799) | 127⅞ x 38⅞ x 102 | 3229 x 988 x 2591 |
| TRM5M-NN-BLK-WHT-1BLKLLLLL-4 | 2 | 5 | 25 | ¾ | 9.2 | 2050 (930) | 158⅞ x 38⅞ x 102 | 4035 X 988 X 2591 |
| TRM5M-NY-BLK-WHT-1BLKLLLLL-4 | 2 | 5 | 25 | ¾ | 9.2 | 2050 (930) | 158¾ x 38⅞ x 102 | 4032 x 988 x 2591 |
| TRM5M-YN-BLK-WHT-1BLKLLLLL-4 | 2 | 5 | 25 | ¾ | 9.2 | 2050 (930) | 157⅞ x 38⅞ x 102 | 4004 x 988 x 2591 |
| TRM5M-YY-BLK-WHT-1BLKLLLLL-4 | 2 | 5 | 25 | ¾ | 9.2 | 2050 (930) | 157⅞ x 38⅞ x 102 | 4004 x 988 x 2591 |


† Depth does not include 1½" (39mm) for door handles.

* Refrigeration decks ship separately and individually.

Bankable Units to Create Seamless Look

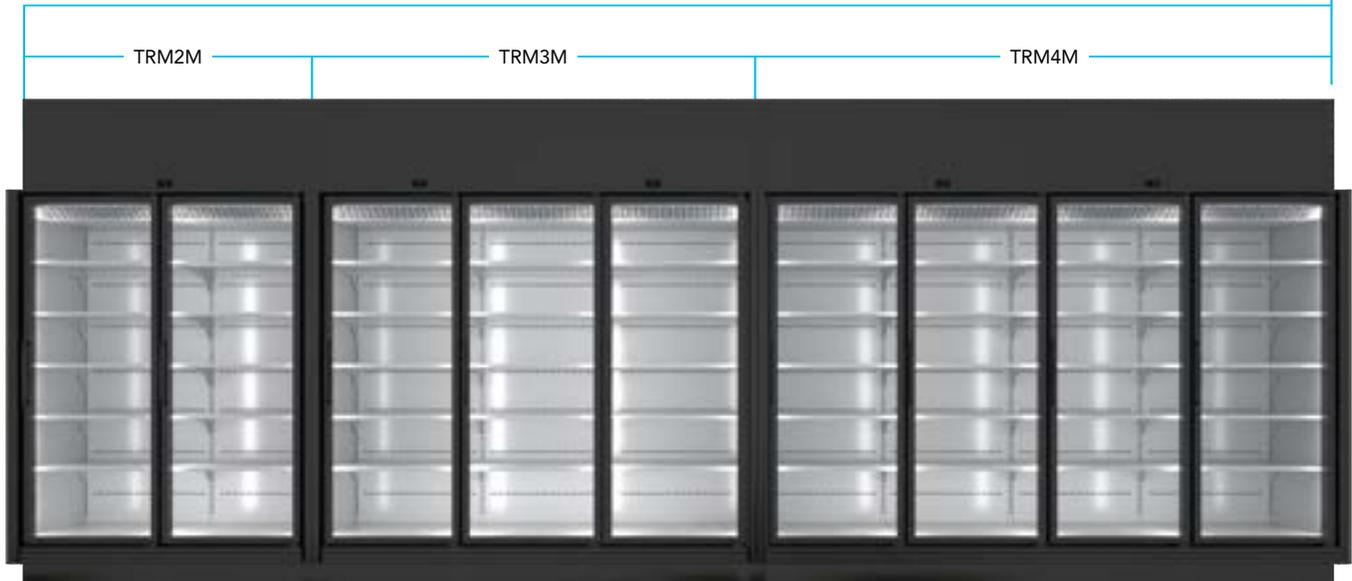

END PANEL CONFIGURATION

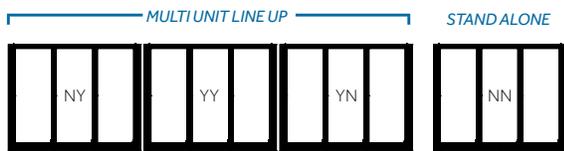

PANELS:

N = 2 ½" (End panel)

Y = 1 ½" (In-line panel)



Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



RETAIL MERCHANDISER FREEZERS - LOW TEMP

Swing Doors

Take advantage of the install flexibility, convenience, and efficiency of this self-contained case. Fit TRM's through doorways, move the case into location, install the compact sealed condensing systems and plug it in. No refrigeration connections or technicians needed for install



Total of 15 (5 per door) adjustable, solid white powder coated cantilever shelves 30W" x 25D"

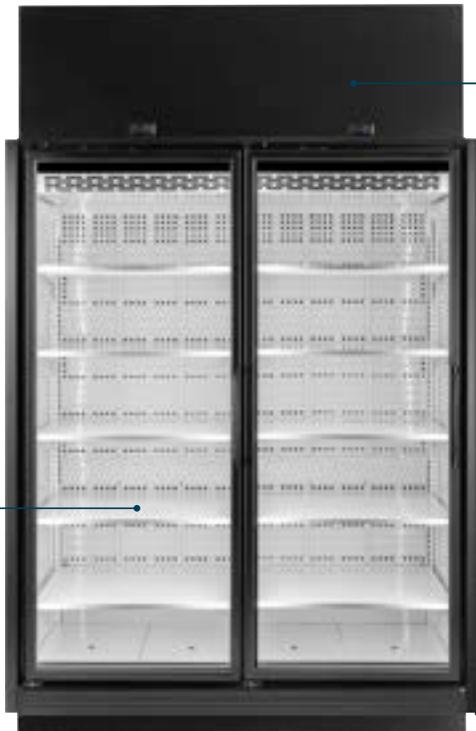

The True Dynamic Refrigeration Response System® allows for quick product pull down where and when cooling demand is needed

The entire cabinet structure is built using high-density, polyurethane insulation that has zero ozone depletion potential

TRM2L-YN-BLK-WHT-1BLKLL-4



TRM3L-NN-BLK-WHT-1BLKLLL-4



TRM4L-NN-BLK-BLK-1BLKLLL-4



TRM5L-YN-BLK-WHT-1BLKLLLLL-4

Features/Benefits

- Freezers maintain holding temperatures of 6°F (-14.4°C) to -10°F (-23.3°C).
- True's Retail Merchandiser (TRM) is an advanced self-contained cabinet built for large storage capacity and exceptional product display.
- Available in 2,3, and 4 door models, the TRM's are ideal for multi-door case lineups, end cap placements, and general refrigeration storage applications.
- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent.
- Interior - attractive, white aluminum interior liner with stainless steel floor. Black aluminum interior available.
- Plug-and-play electrical system for seamless installation (No refrigeration tech or electrician needed).
- 4000k color temperature LED interior lighting, provides brilliant lighting throughout the cabinet.
- Self closing door with stay open feature.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.
- "Low-E", triple pane thermal insulated glass door.
- Patented True Level leveling systems for a quick install.
- Self-contained factory charged and sealed refrigerator system.
- Viewable glass height of 70" for maximum product display.
- Exterior Digital Temperature Display.
- Unit completely pre-wired at factory and ready for final connection to a 208-240V-1PH-60Hz, cord and plug set included.




TRM® RETAIL MERCHANDISER FREEZERS

| Model | # of Refrigerator Decks* | # of Doors | # of Shelves | HP per Deck | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H (in) | Cabinet Dimensions W D† H (mm) |
|----------------------------------|--------------------------|------------|--------------|-------------|------|-------------------------|--------------------------------|--------------------------------|
| SWING DOORS REFRIGERATORS | | | | | | | | |
| TRM2L-NN-BLK-WHT-1BLKLL-4 | 2 | 2 | 10 | 1¼ | 13.8 | 1020 (463) | 67½ x 38⅞ x 102 | 1715 x 988 x 2591 |
| TRM2L-NY-BLK-WHT-1BLKLL-4 | 2 | 2 | 10 | 1¼ | 13.8 | 1020 (463) | 67⅞ x 38⅞ x 102 | 1712 x 988 x 2591 |
| TRM2L-YN-BLK-WHT-1BLKLL-4 | 2 | 2 | 10 | 1¼ | 13.8 | 1020 (463) | 66⅞ x 38⅞ x 102 | 1686 x 988 x 2591 |
| TRM2L-YY-BLK-WHT-1BLKLL-4 | 2 | 2 | 10 | 1¼ | 13.8 | 1020 (463) | 66¼ x 38⅞ x 102 | 1683 x 988 x 2591 |
| TRM3L-NN-BLK-WHT-1BLKLLL-4 | 2 | 3 | 15 | 1¼ | 13.8 | 1318 (598) | 98 x 38⅞ x 102 | 2490 x 988 x 2591 |
| TRM3L-NY-BLK-WHT-1BLKLLL-4 | 2 | 3 | 15 | 1¼ | 13.8 | 1318 (598) | 97⅞ x 38⅞ x 102 | 2486 x 988 x 2591 |
| TRM3L-YN-BLK-WHT-1BLKLLL-4 | 2 | 3 | 15 | 1¼ | 13.8 | 1318 (598) | 96⅞ x 38⅞ x 102 | 2461 x 988 x 2591 |
| TRM3L-YY-BLK-WHT-1BLKLLL-4 | 2 | 3 | 15 | 1¼ | 13.8 | 1318 (598) | 96⅞ x 38⅞ x 102 | 2455 x 988 x 2591 |
| TRM4L-NN-BLK-WHT-1BLKLLLL-4 | 3 | 4 | 20 | 1¼ | 19.6 | 1760 (799) | 128⅞ x 38⅞ x 102 | 3261 x 988 x 2591 |
| TRM4L-NY-BLK-WHT-1BLKLLLL-4 | 3 | 4 | 20 | 1¼ | 19.6 | 1760 (799) | 128¼ x 38⅞ x 102 | 3258 x 988 x 2591 |
| TRM4L-YN-BLK-WHT-1BLKLLLL-4 | 3 | 4 | 20 | 1¼ | 19.6 | 1760 (799) | 127¼ x 38⅞ x 102 | 3233 x 988 x 2591 |
| TRM4L-YY-BLK-WHT-1BLKLLLL-4 | 3 | 4 | 20 | 1¼ | 19.6 | 1760 (799) | 127⅞ x 38⅞ x 102 | 3229 x 988 x 2591 |
| TRM5L-NN-BLK-WHT-1BLKLLLLL-4 | 3 | 5 | 25 | 1¼ | 18.3 | 2050 (930) | 158¾ x 38⅞ x 102 | 4032 x 988 x 2591 |
| TRM5L-NY-BLK-WHT-1BLKLLLLL-4 | 3 | 5 | 25 | 1¼ | 18.3 | 2050 (930) | 158¾ x 38⅞ x 102 | 4032 x 988 x 2591 |
| TRM5L-YN-BLK-WHT-1BLKLLLLL-4 | 3 | 5 | 25 | 1¼ | 18.3 | 2050 (930) | 157⅞ x 38⅞ x 102 | 4004 x 988 x 2591 |
| TRM5L-YY-BLK-WHT-1BLKLLLLL-4 | 3 | 5 | 25 | 1¼ | 18.3 | 2050 (930) | 157⅞ x 38⅞ x 102 | 4004 x 988 x 2591 |


† Depth does not include 1½" (39mm) for door handles.

* Refrigeration decks ship separately and individually.

Bankable Units to Create Seamless Look

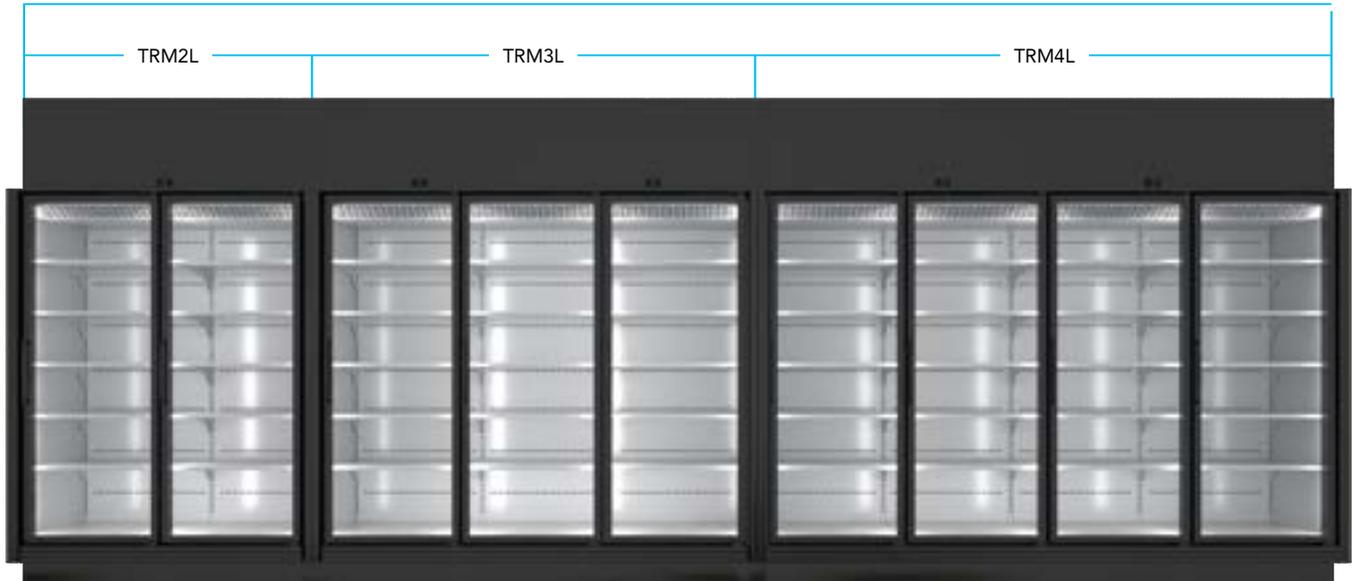

END PANEL CONFIGURATION

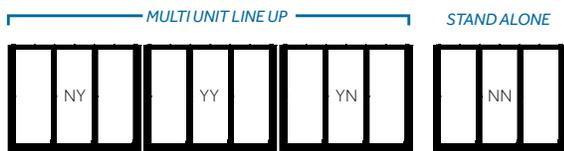

PANELS:
N = 2 ½" (End panel)
Y = 1 ½" (In-line panel)

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.







CURVED GLASS DISPLAY MERCHANDISERS



The innovative curved glass display merchandiser design marries the sophistication of a curved glass display with enhanced performance. The TDM™ Series display merchandisers are ideally suited for high-end interiors that demand premium materials and technical innovation.

TDM™ & TGM™ NOMENCLATURE

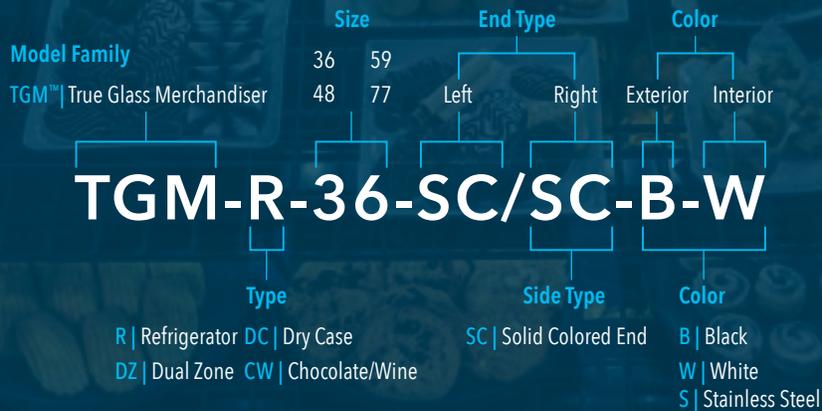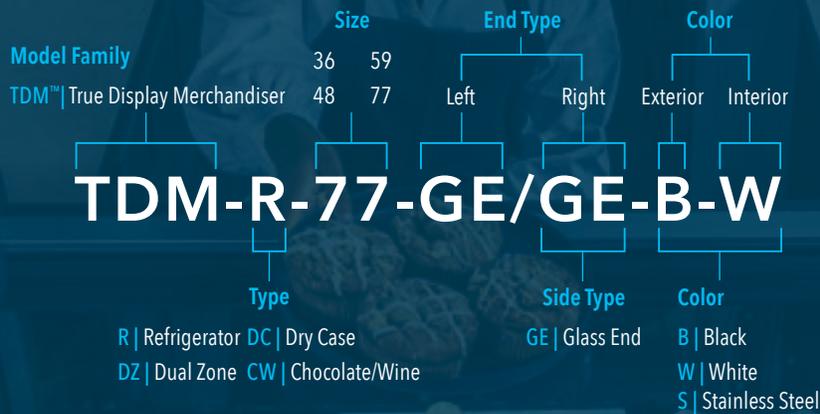



Curved Glass Display Merchandisers | TDM™-R

FRONT-ACCESS REFRIGERATED DISPLAY MERCHANDISERS

Glass & Mirrored Ends

Three (3) tiered levels of adjustable wire cantilever shelves that match cabinet interior color. Chrome plated wire shelves standard on stainless interior units




Front glass swings up for easy cleaning access



Two (2) rear sliding glass doors for back access



Exclusive reversing condenser fan motor. Fan motor reverses during defrost off cycles to help keep condenser coil free from dirt, dust and debris. Keeping coils clean optimizes the unit's performance providing colder holding temperatures and increased energy efficiency. Regularly scheduled thorough cleaning of coils still recommended



TDM-R-36-GE/GE-B-W



TDM-R-36-GE/GE-S-W



TDM-R-48-GE/GE-W-W



TDM-R-59-GE/GE-B-W



TDM-R-77-GE/GE-B-W

Features/Benefits

- Refrigeration system that has two (2) temperature range options. Standard temperature range maintains cabinet temperatures of 33°F to 41°F (.5°C to 5°C), ideally suited for refrigerated bakery and cold deli products. Optional temperature range maintains cabinet temperatures of 42°F to 65°F (5.5°C to 18.3°C), ideally suited for chocolate & wine options.
- True's refrigerated display case combines efficient, high volume merchandising and exceptional refrigeration with an elegant curved glass front for sophisticated presentation of high-end deli, desserts and pastries.
- NSF/ANSI Standard 7 compliant for open food product. Tested and certified for performance at NSF Type II: 80°F (27°C) and 55% relative humidity.
- Exterior - powder coated FDA black rounded front and back, black aluminum aesthetic side and front panels. Color options available at no charge - white or stainless. Curved glass front and side glass panels.
- Interior - powder coated FDA white over CRS material. Color options available (upcharge applies) - black or stainless.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Standard in Clear Glass Ends (GE).
- TDM's have a variety of optional interior/exterior shelving available (see accessory section for details).
- Designed to provide an attractive companion to our TDM-DC "dry case" display merchandiser.



TDM™-R FRONT-ACCESS REFRIGERATED DISPLAY MERCHANDISERS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| GLASS END/GLASS END WITH BLACK EXTERIOR/WHITE INTERIOR | | | | | | | |
| TDM-R-36-GE/GE-B-W | 2 | 3 | ¼ | 10.0 | 540 (245) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TDM-R-48-GE/GE-B-W | 2 | 3 | ½ | 12.0 | 645 (293) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TDM-R-59-GE/GE-B-W | 2 | 3 | ½ | 12.0 | 760 (345) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TDM-R-77-GE/GE-B-W | 2 | 3 | ½ | 12.0 | 845 (384) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |
| GLASS END/GLASS END WITH WHITE EXTERIOR/WHITE INTERIOR | | | | | | | |
| TDM-R-36-GE/GE-W-W | 2 | 3 | ¼ | 10.0 | 540 (245) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TDM-R-48-GE/GE-W-W | 2 | 3 | ½ | 12.0 | 645 (293) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TDM-R-59-GE/GE-W-W | 2 | 3 | ½ | 12.0 | 760 (345) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TDM-R-77-GE/GE-W-W | 2 | 3 | ½ | 12.0 | 845 (384) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |
| GLASS END/GLASS END WITH STAINLESS EXTERIOR/WHITE INTERIOR | | | | | | | |
| TDM-R-36-GE/GE-S-W | 2 | 3 | ¼ | 10.0 | 660 (300) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TDM-R-48-GE/GE-S-W | 2 | 3 | ½ | 12.0 | 645 (293) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TDM-R-59-GE/GE-S-W | 2 | 3 | ½ | 12.0 | 760 (345) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TDM-R-77-GE/GE-S-W | 2 | 3 | ½ | 12.0 | 850 (386) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |
| GLASS END/GLASS END WITH STAINLESS EXTERIOR/STAINLESS INTERIOR | | | | | | | |
| TDM-R-36-GE/GE-S-S | 2 | 3 | ¼ | 10.0 | 660 (300) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TDM-R-48-GE/GE-S-S | 2 | 3 | ½ | 12.0 | 645 (293) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TDM-R-59-GE/GE-S-S | 2 | 3 | ½ | 12.0 | 760 (345) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TDM-R-77-GE/GE-S-S | 2 | 3 | ½ | 12.0 | 850 (386) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |

EXTERIORS (Custom color available upon request)

GE



Clear Glass Interior / Clear Glass Exterior with Black Trim

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



Curved Glass Display Merchandisers | TDM™-DZ

FRONT-ACCESS DUAL ZONE DISPLAY MERCHANDISERS

Glass & Mirrored Ends


Three (3) tiered levels of adjustable wire cantilever shelves that match cabinet interior color. Chrome plated wire shelves standard on stainless interior units



Front glass swings up for easy cleaning access



Two (2) rear sliding glass doors for back access



Exclusive reversing condenser fan motor. Fan motor reverses during defrost off cycles to help keep condenser coil free from dirt, dust and debris. Keeping coils clean optimizes the unit's performance providing colder holding temperatures and increased energy efficiency. Regularly scheduled thorough cleaning of coils still recommended



TDM-DZ-59-GE/GE-B-W



TDM-DZ-48-GE/GE-S-W



TDM-DZ-59-GE/GE-S-S



TDM-DZ-77-GE/GE-B-W

Features/Benefits

- Refrigeration system that has two (2) temperature range options. Standard temperature range maintains cabinet temperatures of 33°F to 41°F (5°C to 5°C), ideally suited for refrigerated bakery and cold deli products. Optional temperature range maintains cabinet temperatures of 42°F to 65°F (5.5°C to 18.3°C), ideally suited for chocolate & wine options.
- True's combination "refrigerated" and "dry" display case combines efficient, high volume merchandising and exceptional refrigeration with an elegant curved glass front for sophisticated presentation of high-end deli, desserts and pastries.
- NSF/ANSI Standard 7 compliant for open food product. Tested and certified for performance at NSF Type II: 80°F (27°C) and 55% relative humidity.
- Exterior - powder coated FDA black rounded front and back, black aluminum aesthetic side and front panels. Color options available at no charge - white or stainless. Curved glass front and side glass panels.
- Interior - powder coated FDA white over CRS material. Color options available (upcharge applies) - black or stainless.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Standard in Clear Glass Ends (GE).
- TDM's have a variety of optional interior/exterior shelving available (see accessory section for details).
- Designed to provide an attractive companion to our TDM-R "refrigerated" or TDM-DC "dry case" display merchandiser.



TDM™-DZ FRONT-ACCESS DUAL ZONE DISPLAY MERCHANDISERS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| GLASS END/GLASS END WITH BLACK EXTERIOR/WHITE INTERIOR | | | | | | | |
| TDM-DZ-48-GE/GE-B-W | 2 | 6 | ¼ | 10.0 | 690 (313) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TDM-DZ-59-GE/GE-B-W | 2 | 6 | ¼ | 10.0 | 770 (350) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TDM-DZ-77-GE/GE-B-W | 2 | 6 | ¼ | 10.0 | 795 (361) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |
| GLASS END/GLASS END WITH WHITE EXTERIOR/WHITE INTERIOR | | | | | | | |
| TDM-DZ-48-GE/GE-W-W | 2 | 6 | ¼ | 10.0 | 690 (313) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TDM-DZ-59-GE/GE-W-W | 2 | 6 | ¼ | 10.0 | 770 (350) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TDM-DZ-77-GE/GE-W-W | 2 | 6 | ¼ | 10.0 | 920 (418) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |
| GLASS END/GLASS END WITH STAINLESS EXTERIOR/WHITE INTERIOR | | | | | | | |
| TDM-DZ-48-GE/GE-S-W | 2 | 6 | ¼ | 10.0 | 665 (302) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TDM-DZ-59-GE/GE-S-W | 2 | 6 | ¼ | 10.0 | 680 (309) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TDM-DZ-77-GE/GE-S-W | 2 | 6 | ¼ | 10.0 | 920 (418) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |
| GLASS END/GLASS END WITH STAINLESS EXTERIOR/STAINLESS INTERIOR | | | | | | | |
| TDM-DZ-48-GE/GE-S-S | 2 | 6 | ¼ | 10.0 | 665 (302) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TDM-DZ-59-GE/GE-S-S | 2 | 6 | ¼ | 10.0 | 680 (309) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TDM-DZ-77-GE/GE-S-S | 2 | 6 | ¼ | 10.0 | 920 (418) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |

EXTERIORS (Custom color available upon request)

GE



Clear Glass Interior / Clear Glass Exterior with Black Trim

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



FRONT-ACCESS DRY DISPLAY MERCHANDISERS

Glass & Mirrored Ends


Three (3) tiered levels of adjustable wire cantilever shelves that match cabinet interior color. Chrome plated wire shelves standard on stainless interior units



Front glass swings up for easy cleaning access



Two (2) rear sliding glass doors for back access



TDM-DC-48-GE/GE-B-W



TDM-DC-36-GE/GE-B-W



TDM-DC-48-GE/GE-S-S



TDM-DC-59-GE/GE-B-W



TDM-DC-77-GE/GE-W-W

Features/Benefits

- True's "dry" display case combines efficient, high volume merchandising with an elegant curved glass front for sophisticated presentation of high-end desserts and pastries.
- Cabinet is NSF/ANSI Standard 2 certified to hold open food product.
- Exterior - powder coated FDA black rounded front and back, black aluminum aesthetic side and front panels. Color options available at no charge - white or stainless. Curved glass front and side glass panels.
- Interior - powder coated FDA white over CRS material. Color options available (upcharge applies) - black or stainless.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Standard in Clear Glass Ends (GE).
- TDM's have a variety of optional interior/exterior shelving available (see accessory section for details).
- Designed to provide an attractive companion to our TDM-R "refrigerated" display merchandiser. TDM-DC "dry case" cabinets do not require refrigeration



TDM™-DC FRONT-ACCESS DRY DISPLAY MERCHANDISERS

| Model | # of Doors | # of Shelves | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|------------|--------------|------|-------------------------|---------------------------------|---------------------------------|
| GLASS END/GLASS END WITH BLACK EXTERIOR/WHITE INTERIOR | | | | | | |
| TDM-DC-36-GE/GE-B-W | 2 | 3 | 7.0 | 485 (220) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TDM-DC-48-GE/GE-B-W | 2 | 3 | 7.0 | 580 (264) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TDM-DC-59-GE/GE-B-W | 2 | 3 | 7.0 | 665 (302) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TDM-DC-77-GE/GE-B-W | 2 | 3 | 7.0 | 685 (311) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |
| GLASS END/GLASS END WITH WHITE EXTERIOR/WHITE INTERIOR | | | | | | |
| TDM-DC-36-GE/GE-W-W | 2 | 3 | 7.0 | 485 (220) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TDM-DC-48-GE/GE-W-W | 2 | 3 | 7.0 | 580 (264) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TDM-DC-59-GE/GE-W-W | 2 | 3 | 7.0 | 665 (302) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TDM-DC-77-GE/GE-W-W | 2 | 3 | 7.0 | 685 (311) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |
| GLASS END/GLASS END WITH STAINLESS EXTERIOR/WHITE INTERIOR | | | | | | |
| TDM-DC-36-GE/GE-S-W | 2 | 3 | 7.0 | 490 (223) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TDM-DC-48-GE/GE-S-W | 2 | 3 | 7.0 | 580 (264) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TDM-DC-59-GE/GE-S-W | 2 | 3 | 7.0 | 665 (302) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TDM-DC-77-GE/GE-S-W | 2 | 3 | 7.0 | 830 (377) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |
| GLASS END/GLASS END WITH STAINLESS EXTERIOR/STAINLESS INTERIOR | | | | | | |
| TDM-DC-36-GE/GE-S-S | 2 | 3 | 7.0 | 485 (220) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TDM-DC-48-GE/GE-S-S | 2 | 3 | 7.0 | 580 (264) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TDM-DC-59-GE/GE-S-S | 2 | 3 | 7.0 | 665 (302) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TDM-DC-77-GE/GE-S-S | 2 | 3 | 7.0 | 830 (377) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |

EXTERIORS (Custom color available upon request)

GE




Clear Glass Interior / Clear Glass Exterior with Black Trim

FIXED GLASS REFRIGERATED MERCHANDISERS

Solid Colored & Mirrored Ends

Two (2) rear sliding glass doors for back access



Curved glass front and side glass panels



Three (3) tiered levels of adjustable wire cantilever shelves that match cabinet interior color. Chrome plated wire shelves standard on stainless interior units



Exclusive reversing condenser fan motor. Fan motor reverses during defrost off cycles to help keep condenser coil free from dirt, dust and debris. Keeping coils clean optimizes the unit's performance providing colder holding temperatures and increased energy efficiency. Regularly scheduled thorough cleaning of coils still recommended



TGM-R-34-SC/SC-B-S



TGM-R-36-SC/SC-W-W



TGM-R-59-SC/SC-S-W



TGM-R-77-SC/SC-B-W

Features/Benefits

- Refrigeration system that has two (2) temperature range options. Standard temperature range maintains cabinet temperatures of 33°F to 41°F (.5°C to 5°C), ideally suited for refrigerated bakery and cold deli products. Optional temperature range maintains cabinet temperatures of 42°F to 65°F (5.5°C to 18.3°C), ideally suited for chocolate & wine options.
- True's refrigerated display case combines efficient, high volume merchandising and exceptional refrigeration with an elegant curved glass front for sophisticated presentation of high-end deli, desserts and pastries.
- NSF/ANSI Standard 7 compliant for open food product. Tested and certified for performance at NSF Type II: 80°F (27°C) and 55% relative humidity.
- Exterior - powder coated FDA black rounded front and back, solid wood sides with aluminum cover and front panels. Color options available (upcharge may apply) - white or stainless.
- Interior - powder coated FDA white over CRS material. Color options available (upcharge applies) - black or stainless.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Standard in Solid Colored Ends (SC).
- TGM's have a variety of optional interior/exterior shelving available (see accessory section for details).
- Designed to provide an attractive companion to our TDM-DC "dry case" display merchandiser.



TGM™-R FIXED GLASS REFRIGERATED MERCHANDISERS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID COLORED END/SOLID COLORED END WITH BLACK EXTERIOR/WHITE INTERIOR | | | | | | | |
| TGM-R-36-SC/SC-B-W | 2 | 6 | ¼ | 10.0 | 580 (264) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TGM-R-48-SC/SC-B-W | 2 | 6 | ½ | 12.0 | 685 (311) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TGM-R-59-SC/SC-B-W | 2 | 6 | ½ | 12.0 | 760 (345) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TGM-R-77-SC/SC-B-W | 2 | 6 | ½ | 12.0 | 935 (425) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |
| SOLID COLORED END/SOLID COLORED END WITH WHITE EXTERIOR/WHITE INTERIOR | | | | | | | |
| TGM-R-36-SC/SC-W-W | 2 | 6 | ¼ | 10.0 | 580 (264) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TGM-R-48-SC/SC-W-W | 2 | 6 | ½ | 12.0 | 685 (311) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TGM-R-59-SC/SC-W-W | 2 | 6 | ½ | 12.0 | 760 (345) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TGM-R-77-SC/SC-W-W | 2 | 6 | ½ | 12.0 | 935 (425) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |
| SOLID COLORED END/SOLID COLORED END WITH STAINLESS EXTERIOR/WHITE INTERIOR | | | | | | | |
| TGM-R-36-SC/SC-S-W | 2 | 6 | ¼ | 10.0 | 580 (264) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TGM-R-48-SC/SC-S-W | 2 | 6 | ½ | 12.0 | 685 (311) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TGM-R-59-SC/SC-S-W | 2 | 6 | ½ | 12.0 | 760 (345) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TGM-R-77-SC/SC-S-W | 2 | 6 | ½ | 12.0 | 855 (388) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |
| SOLID COLORED END/SOLID COLORED END WITH STAINLESS EXTERIOR/STAINLESS INTERIOR | | | | | | | |
| TGM-R-36-SC/SC-S-S | 2 | 6 | ¼ | 10.0 | 580 (264) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TGM-R-48-SC/SC-S-S | 2 | 6 | ½ | 12.0 | 685 (311) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TGM-R-59-SC/SC-S-S | 2 | 6 | ½ | 12.0 | 760 (345) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TGM-R-77-SC/SC-S-S | 2 | 6 | ½ | 12.0 | 855 (388) | 77¼ x 39 x 49½ | 1963 x 991 x 1248 |

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



FIXED GLASS DUAL ZONE MERCHANDISERS

Solid Colored & Mirrored Ends

Two (2) rear sliding glass doors for back access




Three (3) tiered levels of adjustable wire cantilever shelves that match cabinet interior color. Chrome plated wire shelves standard on stainless interior units



Curved glass front and side glass panels

Exclusive reversing condenser fan motor. Fan motor reverses during defrost off cycles to help keep condenser coil free from dirt, dust and debris. Keeping coils clean optimizes the unit's performance providing colder holding temperatures and increased energy efficiency. Regularly scheduled thorough cleaning of coils still recommended



TGM-DZ-59-SC/SC-B-W



TGM-DZ-48-SC/SC-S-W



TGM-DZ-59-SC/SC-W-W



TGM-DZ-77-SC/SC-B-W

Features/Benefits

- Refrigeration system that has two (2) temperature range options. Standard temperature range maintains cabinet temperatures of 33°F to 41°F (.5°C to 5°C), ideally suited for refrigerated bakery and cold deli products. Optional temperature range maintains cabinet temperatures of 42°F to 65°F (5.5°C to 18.3°C), ideally suited for chocolate & wine options.
- True's combination "refrigerated" and "dry" glass merchandiser combines efficient, high volume merchandising and exceptional refrigeration with an elegant curved glass front for sophisticated presentation of high-end deli, desserts and pastries.
- NSF/ANSI Standard 7 compliant for open food product. Tested and certified for performance at NSF Type II: 80°F (27°C) and 55% relative humidity.
- Exterior - powder coated FDA black rounded front and back, solid wood sides with aluminum cover and front panels. Color options available (upcharge may apply) - white or stainless.
- Interior - powder coated FDA white over CRS material. Color options available (upcharge applies) - black or stainless.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Standard in Solid Colored Ends (SC).
- TGM's have a variety of optional interior/exterior shelving available (see accessory section for details).
- Designed to provide an attractive companion to our TGM-R "refrigerated" or TGM-DC "dry case" display merchandiser.



TGM™-DZ FIXED GLASS DUAL ZONE MERCHANDISERS

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID COLORED END/SOLID COLORED END WITH BLACK EXTERIOR/WHITE INTERIOR | | | | | | | |
| TGM-DZ-48-SC/SC-B-W | 2 | 6 | ¼ | 10.0 | 710 (323) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TGM-DZ-59-SC/SC-B-W | 2 | 6 | ¼ | 10.0 | 800 (363) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TGM-DZ-77-SC/SC-B-W | 2 | 6 | ¼ | 10.0 | 940 (427) | 77¼ x 39 x 49½ | 1962 x 991 x 1248 |
| SOLID COLORED END/SOLID COLORED END WITH WHITE EXTERIOR/WHITE INTERIOR | | | | | | | |
| TGM-DZ-48-SC/SC-W-W | 2 | 6 | ¼ | 10.0 | 665 (302) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TGM-DZ-59-SC/SC-W-W | 2 | 6 | ¼ | 10.0 | 800 (363) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TGM-DZ-77-SC/SC-W-W | 2 | 6 | ¼ | 10.0 | 940 (427) | 77¼ x 39 x 49½ | 1962 x 991 x 1248 |
| SOLID COLORED END/SOLID COLORED END WITH STAINLESS EXTERIOR/WHITE INTERIOR | | | | | | | |
| TGM-DZ-48-SC/SC-S-W | 2 | 6 | ¼ | 10.0 | 710 (323) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TGM-DZ-59-SC/SC-S-W | 2 | 6 | ¼ | 10.0 | 770 (350) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TGM-DZ-77-SC/SC-S-W | 2 | 6 | ¼ | 10.0 | 940 (427) | 77¼ x 39 x 49½ | 1962 x 991 x 1248 |
| SOLID COLORED END/SOLID COLORED END WITH STAINLESS EXTERIOR/STAINLESS INTERIOR | | | | | | | |
| TGM-DZ-48-SC/SC-S-S | 2 | 6 | ¼ | 10.0 | 665 (302) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TGM-DZ-59-SC/SC-S-S | 2 | 6 | ¼ | 10.0 | 800 (363) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TGM-DZ-77-SC/SC-S-S | 2 | 6 | ¼ | 10.0 | 940 (427) | 77¼ x 39 x 49½ | 1962 x 991 x 1248 |

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



FIXED GLASS DRY MERCHANDISERS

Sold Colored & Mirrored Ends

Two (2) rear sliding glass doors for back access



Curved glass front and side glass panels



Three (3) tiered levels of adjustable wire cantilever shelves that match cabinet interior color. Chrome plated wire shelves standard on stainless interior units



TGM-DC-48-SC/SC-B-W



TGM-DC-36-SC/SC-B-W



TGM-DC-48-SC/SC-W-W



TGM-DC-59-SC/SC-S-S



TDM-DC-77-SC/SC-S-W

Features/Benefits

- True's "dry" display case combines efficient, high volume merchandising with an elegant curved glass front for sophisticated presentation of high-end desserts and pastries.
- Cabinet is NSF/ANSI Standard 2 certified to hold open food product.
- Exterior - powder coated FDA black rounded front and back, solid wood sides with aluminum cover and front panels. Color options available (upcharge may apply) - white or stainless.
- Interior - powder coated FDA white over CRS material. Color options available (upcharge applies) - black or stainless.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
- Standard in Solid Colored Ends (SC).
- TDM's have a variety of optional interior/exterior shelving available (see accessory section for details).
- Designed to provide an attractive companion to our TGM-R "refrigerated" display merchandiser. TGM-DC "dry case" cabinets do not require refrigeration




TGM™-DC FIXED GLASS DRY MERCHANDISERS

| Model | # of Doors | # of Shelves | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|------------|--------------|------|-------------------------|---------------------------------|---------------------------------|
| SOLID COLORED END/SOLID COLORED END WITH BLACK EXTERIOR/WHITE INTERIOR | | | | | | |
| TGM-DC-36-SC/SC-B-W | 2 | 6 | 7.0 | 540 (245) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TGM-DC-48-SC/SC-B-W | 2 | 6 | 7.0 | 660 (300) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TGM-DC-59-SC/SC-B-W | 2 | 6 | 7.0 | 660 (300) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TGM-DC-77-SC/SC-B-W | 2 | 6 | 7.0 | 825 (375) | 77¼ x 39 x 49½ | 1962 x 991 x 1248 |
| SOLID COLORED END/SOLID COLORED END WITH WHITE EXTERIOR/WHITE INTERIOR | | | | | | |
| TGM-DC-36-SC/SC-W-W | 2 | 6 | 7.0 | 540 (245) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TGM-DC-48-SC/SC-W-W | 2 | 6 | 7.0 | 660 (300) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TGM-DC-59-SC/SC-W-W | 2 | 6 | 7.0 | 660 (300) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TGM-DC-77-SC/SC-W-W | 2 | 6 | 7.0 | 825 (375) | 77¼ x 39 x 49½ | 1962 x 991 x 1248 |
| SOLID COLORED END/SOLID COLORED END WITH STAINLESS EXTERIOR/WHITE INTERIOR | | | | | | |
| TGM-DC-36-SC/SC-S-W | 2 | 6 | 7.0 | 540 (245) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TGM-DC-48-SC/SC-S-W | 2 | 6 | 7.0 | 660 (300) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TGM-DC-59-SC/SC-S-W | 2 | 6 | 7.0 | 660 (300) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TGM-DC-77-SC/SC-S-W | 2 | 6 | 7.0 | 825 (375) | 77¼ x 39 x 49½ | 1962 x 991 x 1248 |
| SOLID COLORED END/SOLID COLORED END WITH STAINLESS EXTERIOR/STAINLESS INTERIOR | | | | | | |
| TGM-DC-36-SC/SC-S-S | 2 | 6 | 7.0 | 540 (245) | 36¼ x 39 x 49½ | 921 x 991 x 1248 |
| TGM-DC-48-SC/SC-S-S | 2 | 6 | 7.0 | 660 (300) | 48¼ x 39 x 49½ | 1226 x 991 x 1248 |
| TGM-DC-59-SC/SC-S-S | 2 | 6 | 7.0 | 660 (300) | 59¼ x 39 x 49½ | 1505 x 991 x 1248 |
| TGM-DC-77-SC/SC-S-S | 2 | 6 | 7.0 | 825 (375) | 77¼ x 39 x 49½ | 1962 x 991 x 1248 |

REFRIGERATED DELI CASES

White & Stainless Exterior

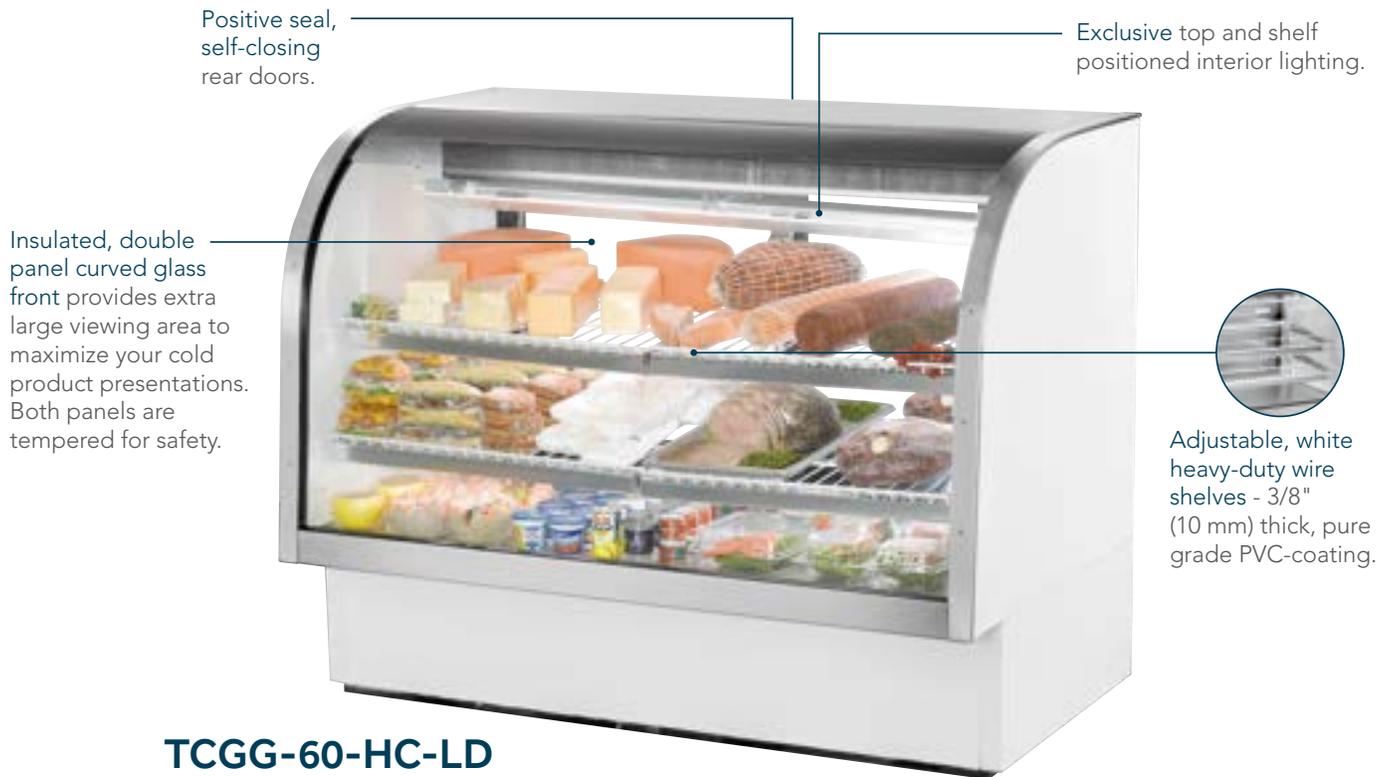

TCGG-60-HC-LD



TCGG-36-HC-LD



TCGG-48-HC-LD



TCGG-60-S-HC-LD



TCGG-77-S-HC-LD

Features/Benefits

- Refrigerator holds ideal 38°F to 40°F (3.3°C to 4.5°C) case temperature for fresher deli products.
 - Exterior - durable and permanent no peel or chip powder coated steel with stainless steel cabinet top and trim.
 - Interior - attractive, clear aluminum sides and top, stainless steel floor with coved corners.
 - LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.
 - Energy efficient, "Low-E", thermal insulated glass rear doors provide maximum insulation.
 - 4 amp exterior scale receptacle.
 - Automatic defrost time clock.
 - Central electrical connections.
 - Space saving design.
 - Self-contained system.
 - Optional lighted and non-lighted stainless steel mezzanine shelves available.
 - Optional 2-1/2" (64mm) castors or 6" (153mm) legs available.
- Stainless Steel models have...**
- Stainless steel interior and exterior, stainless steel floor with coved corners.



TCGG™ REFRIGERATED DELI CASES

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---------------------------|------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| WHITE EXTERIOR | | | | | | | |
| TCGG-36-HC-LD | 2 | 2 | 1/3 | 3.3 | 400 (182) | 36¼ x 35¼ x 47¾ | 921 x 896 x 1213 |
| TCGG-48-HC-LD | 2 | 2 | 1/3 | 3.3 | 550 (250) | 48¼ x 35¼ x 47¾ | 1226 x 896 x 1213 |
| TCGG-60-HC-LD | 2 | 4 | 1/2 | 5.3 | 550 (250) | 60¼ x 35¼ x 47¾ | 1531 x 896 x 1213 |
| TCGG-72-HC-LD | 2 | 2 | 1/2 | 5.3 | 725 (329) | 72¼ x 35¼ x 47¾ | 1836 x 896 x 1213 |
| STAINLESS EXTERIOR | | | | | | | |
| TCGG-36-S-HC-LD | 2 | 2 | 1/3 | 3.3 | 400 (182) | 36¼ x 35¼ x 47¾ | 921 x 896 x 1213 |
| TCGG-48-S-HC-LD | 2 | 2 | 1/3 | 3.3 | 465 (211) | 48¼ x 35¼ x 47¾ | 1226 x 896 x 1213 |
| TCGG-60-S-HC-LD | 2 | 4 | 1/2 | 5.3 | 555 (252) | 60¼ x 35¼ x 47¾ | 1531 x 896 x 1213 |
| TCGG-72-S-HC-LD | 2 | 2 | 1/2 | 5.3 | 730 (331) | 72¼ x 35¼ x 47¾ | 1836 x 896 x 1213 |


Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.





CONVERTIBLE REFRIGERATOR/FREEZER

TRUE FLEXTMP™ cabinets offer the option for frozen or refrigerated products by simply flipping a switch. This gives retailers the flexibility to change the temperature range as needed for any scenario.

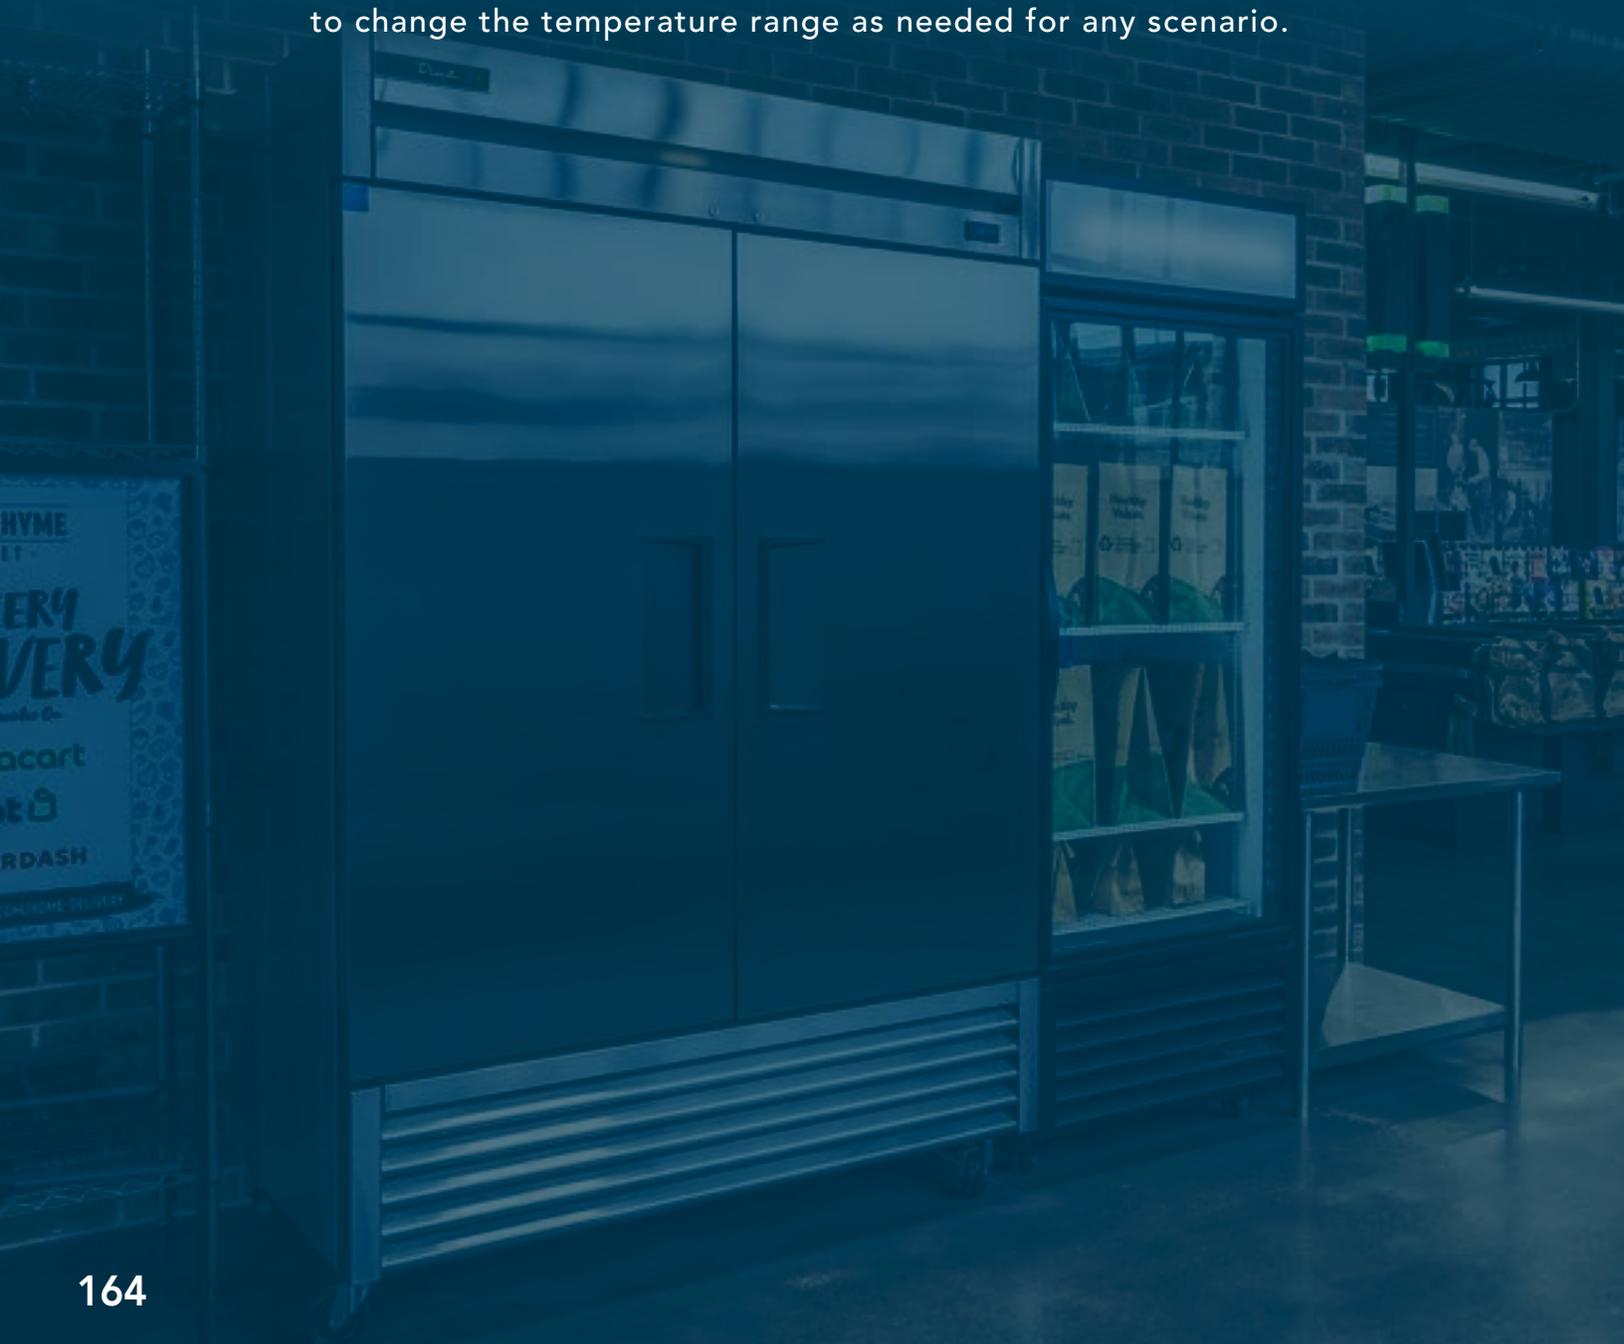



Convertible Refrigerator/Freezer | FLX


CONVERTIBLE REFRIGERATOR/FREEZER

Solid & Glass Doors



Exterior digital temperature displays

Flexibility at the flip of a switch



T-23F-FLX-HC



TUC-27F-FLX-HC



T-23FG-FLX-HC-FGD01



GDM-43FG-FLX-HC



T-49F-FLX-HC



T-49FG-FLX-HC-FGD01

Features/Benefits

- Easily converts from freezer to refrigerator with the flip of a switch.
- Factory balanced, environmentally-friendly R290 Hydrocarbon forced-air refrigeration system.
- Freezer mode maintains -10°F (-23.3°C) product temperatures.
- Refrigerator mode maintains 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Large evaporator and coil heater permit short defrost cycle on freezers.
- Automatic defrost system.
- Energy efficient, thermal insulated glass doors on ~FDG01 models.
- Adjustable, heavy-duty, PVC-coated wire shelves.
- LED interior lighting. Safety shielded.
- A "no-stoop", lower shelf on reach-in models.
- Compressor performs in the coolest, most grease-free area of kitchen for ease of compressor load.
- Compressor can be serviced easily, and accessed by a single repairman.



FLX REACH-IN REFRIGERATOR/FREEZER

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---------------------|------------|--------------|-------|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| T-19F-FLX-HC | 1 | 3 | ½ | 3.7 | 255 (116) | 27 x 24½ x 75¼ | 686 x 623 x 1912 |
| T-23F-FLX-HC | 1 | 3 | ½ | 3.7 | 295 (134) | 27 x 29½ x 78¾ | 686 x 750 x 1991 |
| T-49F-FLX-HC | 2 | 6 | 1 | 9.6 | 480 (218) | 54½ x 29½ x 78¾ | 1375 x 750 x 1991 |
| GLASS DOORS | | | | | | | |
| T-23FG-FLX-HC~FGD01 | 1 | 3 | ½ | 6.2 | 330 (150) | 27 x 29¾ x 78¾ | 686 x 756 x 1991 |
| T-49FG-FLX-HC~FGD01 | 2 | 6 | (2) ½ | 9.5 | 650 (295) | 54½ x 29¾ x 78¾ | 1375 x 756 x 1991 |

† Depth does not include 1¾" (35 mm) for door handles or ½" (13 mm) for system mechanical components.

* Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs (3¼" (83mm) castor height for T-19F-HC).

FLX GLASS DOOR MERCHANDISER REFRIGERATOR/FREEZER

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|----------------------|------------|--------------|-------|------|-------------------------|---------------------------------|---------------------------------|
| GLASS DOORS | | | | | | | |
| GDM-26F-FLX-HC~TSL01 | 1 | 4 | ½ | 4.4 | 340 (155) | 30 x 29¾ x 78¾ | 762 x 759 x 1998 |
| GDM-43F-FLX-HC~TSL01 | 2 | 8 | (2) ½ | 9.5 | 550 (250) | 47¾ x 29¾ x 78¾ | 1196 x 759 x 1998 |
| GDM-49F-FLX-HC~TSL01 | 2 | 8 | (2) ½ | 9.5 | 568 (258) | 54½ x 29¾ x 78¾ | 1375 x 759 x 1998 |

† Depth does not include 1¾" (42 mm) for door handles.

FLX UNDERCOUNTER REFRIGERATOR/FREEZER

| Model | Doors/Drawers | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------|---------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TUC-27F-FLX-HC | 1/0 | 2 | ¼ | 2.3 | 190 (87) | 27½ x 30½ x 29¾ | 702 x 766 x 756 |

† Depth does not include 1" (26mm) for rear bumpers.

* Height does not include 6¼" (159mm) for castors or 6" (153mm) for optional legs.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.





MILK COOLERS



True Milk Coolers provide safer, better-tasting milk with colder holding temperatures for less spoilage. Each features conveniently designed self-service drop-front and flip-top doors. True's forced-air advantage allows milk products to remain cold even with access doors open.





MILK COOLERS

Single & Dual-Sided



All stainless steel self-service doors feature convenient drop front and "hold-open" flip-up top. Standard with door locks.

Dual sided units available for convenient access to product from both sides of unit.

4" (102mm) diameter castors standard equipment (legs available)

Exterior digital temperature displays

TMC-58-DS-SS-HC



TMC-34-S-DS-SS-HC



TMC-49-HC



TMC-49-S-DS-SS-HC



TMC-58-S-SS-HC

Features/Benefits

- High capacity, factory balanced, forced-air refrigeration system maintains milk temperatures of 33°F to 38°F (.5°C to 3.3°C). Colder holding temperatures provide better tasting milk, increased sales and less product waste..
- Exterior - white or stainless steel exterior front, sides, back and top.
- Interior - Stainless steel walls and reinforced floor.
- Standard with heavy duty floor racks and convenient clean out drain.
- Entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- Magnetic door gaskets of one piece construction, removable without tools for ease of cleaning.
- All stainless steel self-service doors feature convenient drop front and "hold-open" flip-up top. Door support bumpers standard.
- NSF/ANSI Standard 7 compliant for the storage and/or display of packaged or bottled product.
- Convenient clean out drain with ½" (13mm) NPT-PVC drain plug.
- Condensing unit accessed from behind back grill, slides out for easy cleaning and maintenance.



TMC™ SINGLE-SIDED MILK COOLERS

| Model | # of Doors | Capacity - Milk Crates | # of Floor Racks | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W** D† H* (in) | Cabinet Dimensions W** D† H* (mm) |
|--|------------|------------------------|------------------|----|------|-------------------------|-----------------------------------|-----------------------------------|
| WHITE & STAINLESS STEEL EXTERIOR/CLEAR ALUMINUM INTERIOR | | | | | | | | |
| TMC-34-HC | 2 | 8 | 2 | ½ | 2.7 | 305 (139) | 34 x 33 x 41½ | 864 x 839 x 1058 |
| TMC-49-HC | 2 | 12 | 3 | ½ | 2.7 | 380 (173) | 49 x 33 x 41½ | 1245 x 839 x 1058 |
| TMC-58-HC | 2 | 16 | 3 | ½ | 2.7 | 425 (193) | 58 x 33 x 41½ | 1474 x 839 x 1058 |
| STAINLESS STEEL EXTERIOR/CLEAR ALUMINUM INTERIOR | | | | | | | | |
| TMC-34-S-HC | 2 | 8 | 2 | ½ | 2.7 | 290 (132) | 34 x 33 x 41½ | 864 x 839 x 1058 |
| TMC-49-S-HC | 2 | 12 | 3 | ½ | 2.7 | 365 (166) | 49 x 33 x 41½ | 1245 x 839 x 1058 |
| TMC-58-S-HC | 2 | 16 | 3 | ½ | 2.7 | 410 (186) | 58 x 33 x 41½ | 1474 x 839 x 1058 |
| WHITE & STAINLESS STEEL EXTERIOR/STAINLESS STEEL INTERIOR | | | | | | | | |
| TMC-34-SS-HC | 2 | 8 | 2 | ½ | 2.7 | 360 (164) | 34 x 33 x 41½ | 864 x 839 x 1058 |
| TMC-49-SS-HC | 2 | 12 | 3 | ½ | 2.7 | 395 (180) | 49 x 33 x 41½ | 1245 x 839 x 1058 |
| TMC-58-SS-HC | 2 | 16 | 3 | ½ | 2.7 | 440 (200) | 58 x 33 x 41½ | 1474 x 839 x 1058 |
| STAINLESS STEEL EXTERIOR/STAINLESS STEEL INTERIOR | | | | | | | | |
| TMC-34-S-SS-HC | 2 | 8 | 2 | ½ | 2.7 | 345 (157) | 34 x 33 x 41½ | 864 x 839 x 1058 |
| TMC-49-S-SS-HC | 2 | 12 | 3 | ½ | 2.7 | 430 (195) | 49 x 33 x 41½ | 1245 x 839 x 1058 |
| TMC-58-S-SS-HC | 2 | 16 | 3 | ½ | 2.7 | 445 (202) | 58 x 33 x 41½ | 1474 x 839 x 1058 |

**Width does not include ½" (4mm) each side for lid pins.

† Depth does not include 1" (26 mm) each for side bumpers.

* Height does not include 5½" (130 mm) for castors.

note: Milk crate dimensions: L=13" (331mm)/D=13 (331mm)/H=11½"(296mm).

TMC™ DUAL-SIDED MILK COOLERS

| Model | # of Doors | Capacity - Milk Crates | # of Floor Racks | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W** D† H* (in) | Cabinet Dimensions W** D† H* (mm) |
|--|------------|------------------------|------------------|----|------|-------------------------|-----------------------------------|-----------------------------------|
| WHITE & STAINLESS STEEL EXTERIOR/CLEAR ALUMINUM INTERIOR | | | | | | | | |
| TMC-34-DS-HC | 4 | 8 | 2 | ½ | 2.7 | 320 (146) | 34 x 33 x 41½ | 864 x 839 x 1058 |
| TMC-49-DS-HC | 4 | 12 | 3 | ½ | 2.7 | 395 (180) | 49 x 33 x 41½ | 1245 x 839 x 1058 |
| TMC-58-DS-HC | 4 | 16 | 3 | ½ | 2.7 | 440 (200) | 58 x 33 x 41½ | 1474 x 839 x 1058 |
| STAINLESS STEEL EXTERIOR/CLEAR ALUMINUM INTERIOR | | | | | | | | |
| TMC-34-S-DS-HC | 4 | 8 | 2 | ½ | 2.7 | 360 (164) | 34 x 33 x 41½ | 864 x 839 x 1058 |
| TMC-49-S-DS-HC | 4 | 12 | 3 | ½ | 2.7 | 405 (184) | 49 x 33 x 41½ | 1245 x 839 x 1058 |
| TMC-58-S-DS-HC | 4 | 16 | 3 | ½ | 2.7 | 485 (220) | 58 x 33 x 41½ | 1474 x 839 x 1058 |
| WHITE & STAINLESS STEEL EXTERIOR/STAINLESS STEEL INTERIOR | | | | | | | | |
| TMC-34-DS-SS-HC | 4 | 8 | 2 | ½ | 2.7 | 350(159) | 34 x 33 x 41½ | 864 x 839 x 1058 |
| TMC-49-DS-SS-HC | 4 | 12 | 3 | ½ | 2.7 | 400 (182) | 49 x 33 x 41½ | 1245 x 839 x 1058 |
| TMC-58-DS-SS-HC | 4 | 16 | 3 | ½ | 2.7 | 460 (209) | 58 x 33 x 41½ | 1474 x 839 x 1058 |
| STAINLESS STEEL EXTERIOR/STAINLESS STEEL INTERIOR | | | | | | | | |
| TMC-34-S-DS-SS-HC | 4 | 8 | 2 | ½ | 2.7 | 355 (162) | 34 x 33 x 41½ | 864 x 839 x 1058 |
| TMC-49-S-DS-SS-HC | 4 | 12 | 3 | ½ | 2.7 | 425 (193) | 49 x 33 x 41½ | 1245 x 839 x 1058 |
| TMC-58-S-DS-SS-HC | 4 | 16 | 3 | ½ | 2.7 | 485 (220) | 58 x 33 x 41½ | 1474 x 839 x 1058 |

**Width does not include ½" (4mm) each side for lid pins.

† Depth does not include 1" (26 mm) each for side bumpers.

* Height does not include 5½" (130 mm) for castors.

note: Milk crate dimensions: L=13" (331mm)/D=13 (331mm)/H=11½"(296mm).

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.





HEATED CABINETS



Heated holding cabinets provide a consistent heat designed to keep baked and cooked food warm. Low-velocity fans evenly circulate air to keep the food warm, while the top vent can be adjusted to control the humidity levels, so food doesn't dry out.




TRUVE

Bottom Mount Reach-Ins | TH Series

HEATED CABINETS

Solid & Glass Doors

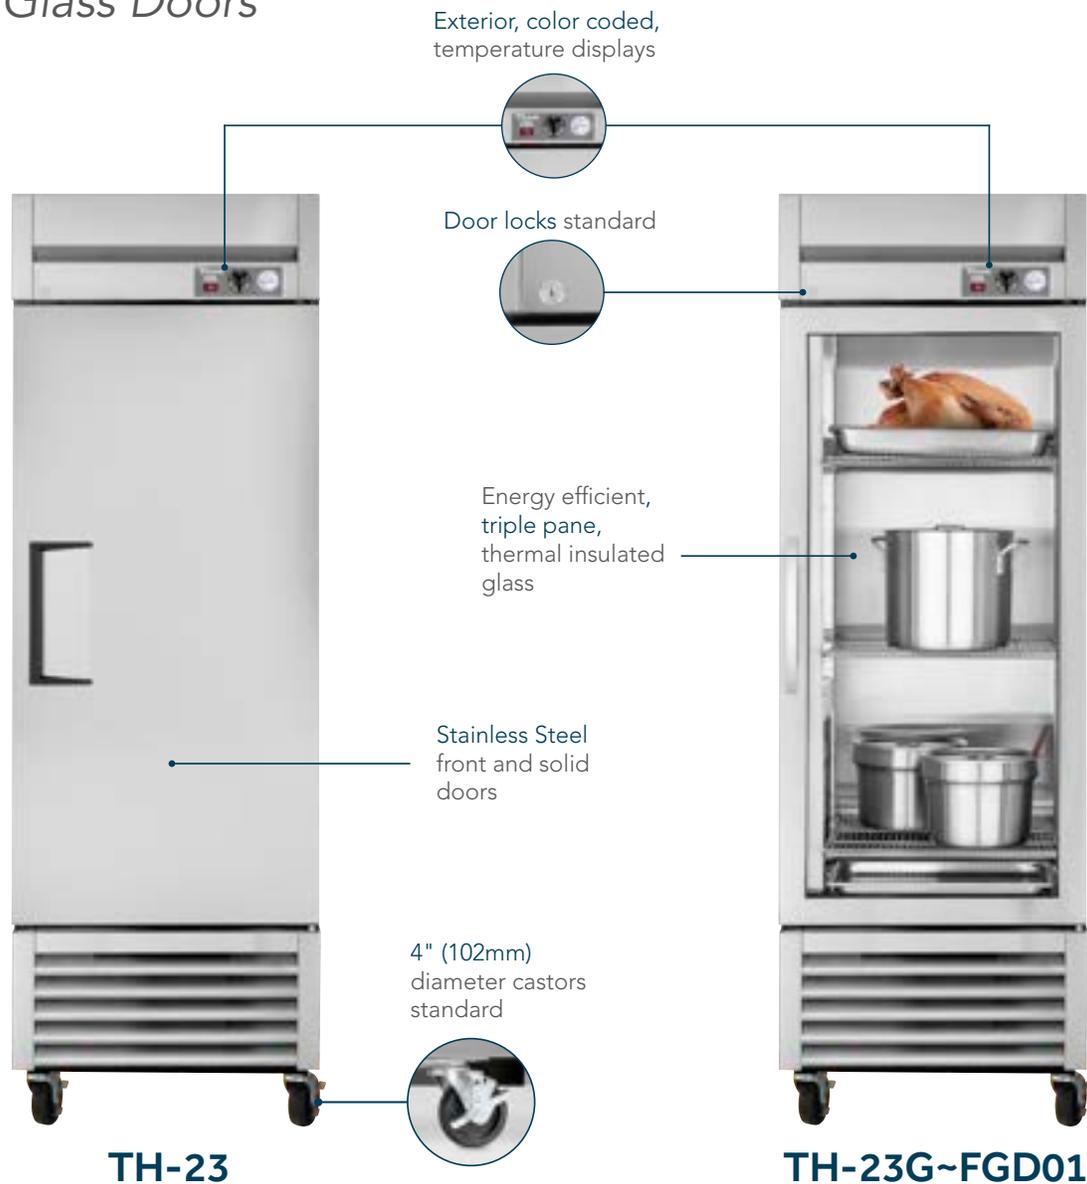

Features/Benefits

- Powerful forced-air heating provides holding temperatures of 80°F (22.7°C) to 180°F (82.2°C) uniformly throughout the cabinet.
- Low velocity fans assure even temperature throughout cabinet. A vent is located at the top of the cabinet for positive humidity control.
- Heater - sheathed for corrosion resistance.
- 12" x 20" (305mm x 508mm) water pan standard for contents requiring high humidity.
- Adjustable dial control is a standard feature for low humidity application (turn counter clockwise to ventilate).
- Adjustable, heavy-duty chrome-plated shelves.
- Positive seal self-closing doors with factory tested (over 1,000,000 times) lifetime guaranteed door hinges and torsion type closure system.
- Incandescent interior lighting, safety shielded.
- Self-contained system - simple installation. Equipped with 9-foot cord.
- Stainless Steel front. Anodized quality aluminum ends. Corrosion resistant GalFan coated steel back.
- Bun tray rack (optional) - solid door heated cabinet interior accommodates this option (glass door model does not accommodate this option).



TH SERIES HEATED CABINETS

| Model | # of Doors | # of Shelves | Watts | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------|------------|--------------|-------|------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | | | |
| TH-23 | 1 | 3 | 850 | 7.8 | 260 (118) | 27 x 29½ x 78¾ | 686 x 750 x 1991 |
| GLASS DOORS | | | | | | | |
| TH-23G~FGD01 | 1 | 3 | 850 | 7.8 | 290 (132) | 27 x 29½ x 78¾ | 686 x 750 x 1991 |

† Depth does not include 1¾" (35 mm) for door handles (glass door model only).
 * Height does not include 5" (127mm) for castors or 6" (153mm) for optional legs.
 * Height does not include 1" (26mm) for ventilator cap.

Top Mount Reach-Ins | SPEC SERIES® Heated Cabinets

STR/STA/STG REACH-IN & PASS-THRU HEATED CABINETS

Solid & Glass, Full & Half Doors

Lifetime guaranteed bolt style door locks



Lifetime guaranteed heavy-duty, all metal working door handles




STR2H-2S

Exterior digital temperature display standard for easy visibility



Positive seal self-closing door with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, four (4) per door section



5" (127 mm) diameter plate castors - locks provided on front set



STG1H-2HS



STR2H-2S



STA2H-2G



STG2HPT-2S-2S

Features/Benefits

- Cabinet designed to provide holding temperatures of 140°F to 180°F (60°C to 82.2°C). Heating system controlled by exterior on/off switch and electronic temperature control.
- One (1) stainless steel (for corrosion resistance) heating element per section for uniform generation of electric heat. 1500 Watts per heating element.
- ANSI/NSF Standard 4 compliant for open food product.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units.
- Incandescent interior lighting.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door models.
- Extruded, aluminum door frames on glass doors.
- STR & STA Series Exterior - Stainless steel door, front & sides.
- STG Series Exterior - stainless steel doors & front, with matching aluminum sides.
- STR Series Interior - Stainless steel side walls, back, floor, door liner, & ceiling.
- STA & STG Series Interior - Aluminum side walls & back. Stainless steel floor & ceiling.
- Self-contained system.



STR/STA/STG REACH-IN HEATED CABINETS

| Model | # of Doors | # of Shelves STA/STG models | Watts | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------------|------------|--------------------------------|-------|----------------------------|------------------------------------|------------------------------------|
| SOLID DOORS | | | | | | |
| STR1H-1S† | 1 | 3 | 1500 | 350 (159) | 27½ x 33¾ x 77¾ | 699 x 858 x 1975 |
| STR2H-2S†† | 2 | 6 | 3000 | 570 (259) | 52½ x 33¾ x 77¾ | 1337 x 858 x 1975 |
| SOLID HALF DOORS | | | | | | |
| STR1H-2HS† | 2 | 3 | 1500 | 385 (175) | 27½ x 33¾ x 77¾ | 699 x 858 x 1975 |
| STR2H-4HS†† | 4 | 6 | 3000 | 650 (295) | 52½ x 33¾ x 77¾ | 1337 x 858 x 1975 |
| GLASS DOORS | | | | | | |
| STR1H-1G† | 1 | 3 | 1500 | 370 (158) | 27½ x 33¾ x 77¾ | 699 x 858 x 1975 |
| STR2H-2G†† | 2 | 6 | 3000 | N/A | 52½ x 33¾ x 77¾ | 1337 x 858 x 1975 |
| GLASS HALF DOORS | | | | | | |
| STR1H-2HG† | 2 | 3 | 1500 | 370 (168) | 27½ x 33¾ x 77¾ | 699 x 858 x 1975 |
| STR2H-4HG†† | 4 | 6 | 3000 | 650 (295) | 52½ x 33¾ x 77¾ | 1337 x 858 x 1975 |

† Depth does not include 1½" (39 mm) for door handles.

* Height does not include 6½" (156mm) for castors or 6" (153mm) for optional legs.

* Height does not include ¼" (7mm) for system mechanical components.

† Requires 208-240/60 single phase, 15 amp dedicated outlet for single section heated cabinets.

†† Requires 208-240/60 single phase, 20 amp dedicated circuit for two section heated cabinets. Two section heated cabinets require hard wiring.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

STR/STA/STG PASS-THRU HEATED CABINETS

| Model | # of Doors | # of Shelves STA/STG models | Watts | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------------|-------------|--------------------------------|-------|----------------------------|------------------------------------|------------------------------------|
| SOLID DOORS | | | | | | |
| STR1HPT-1S-1S† | 1 fr / 1 bk | 3 | 1500 | 400 (182) | 27½ x 36½ x 77¾ | 699 x 918 x 1975 |
| STR2HPT-2S-2S†† | 2 fr / 2 bk | 6 | 3000 | 680 (309) | 52½ x 36½ x 77¾ | 1337 x 918 x 1975 |
| SOLID HALF DOORS | | | | | | |
| STR1HPT-1G-1S† | 1 fr / 1 bk | 3 | 1500 | 400 (182) | 27½ x 36½ x 77¾ | 699 x 918 x 1975 |
| STR2HPT-2G-2S†† | 2 fr / 2 bk | 6 | 3000 | 650 (295) | 52½ x 36½ x 77¾ | 1337 x 918 x 1975 |

† Depth does not include 1½" (39 mm) for door handles.

* Height does not include 6½" (156mm) for castors or 6" (153mm) for optional legs.

* Height does not include ¼" (7mm) for system mechanical components.

† Requires 208-240/60 single phase, 15 amp dedicated outlet for single section heated cabinets.

†† Requires 208-240/60 single phase, 20 amp dedicated circuit for two section heated cabinets. Two section heated cabinets require hard wiring.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

Series Shelving

STR Series Shelving - (1) interior kit option included per full section at no charge.

(4) different interior kits available.

STA Series Shelving - (3) heavy-duty, chrome-plated wire shelves per section.

(4) different interior kits available.

STG Series Shelving - (3) heavy-duty, PVC-coated wire shelves per section.

(4) different interior kits available.

See "Spec Series accessories" (pg. 211) for additional details.

Top Mount Reach-Ins | SPEC SERIES® Heated Cabinets

STR/STA/STG ROLL-IN & ROLL-THRU HEATED CABINETS

Solid, Full Doors



STA1HRT-1S-1S



STG2HRT-2S-2S



STR2HRI-2S



STR1HRI89-1S

Features/Benefits

- Cabinet designed to provide holding temperatures of 140°F to 180°F (60°C to 82.2°C). Heating system controlled by exterior on/off switch and electronic temperature control.
- Accepts roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 66"H (686mm x 737mm x 1,677mm). STR/STA/STG1RRI89-1S and STR/STA/STG2RRI89-2S accept roll-in rack (inboard castor) with maximum dimensions of 27"W x 29"D x 72"H (686mm x 737mm x 1,829mm) (supplied by others).
- One (1) stainless steel (for corrosion resistance) heating element per section for uniform generation of electric heat. 1500 Watts per heating element.
- ANSI/NSF Standard 4 compliant for open food product.
- Pilasters and tray slides/shelving are factory installed at no charge on STR units.
- Positive seal self-closing door with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, four (4) per door section.
- Incandescent interior lighting.
- Energy efficient, "Low-E", thermal insulated glass doors on glass door models.
- Extruded, aluminum door frames on glass doors.
- STR & STA Series Exterior - Stainless steel door, front & sides.
- STG Series Exterior - stainless steel doors & front, with matching aluminum sides.
- STR Series Interior - Stainless steel side walls, back, floor, door liner, & ceiling.
- STA & STG Series Interior - Aluminum side walls & back. Stainless steel floor & ceiling.
- Self-contained system.



STR/STA/STG ROLL-IN HEATED CABINETS

| Model | # of Doors | Watts | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-----------------------------|------------|-------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | |
| STR1HRI-1S‡ | 1 | 2000 | 445 (202) | 35 x 34¾ x 83¾ | 889 x 883 x 1975 |
| STR2HRI-2S | 2 | 4000 | 760 (345) | 68 x 34¾ x 83¾ | 1723 x 883 x 1975 |
| SOLID DOORS 89" HIGH | | | | | |
| STR1HRI89-1S | 1 | 2000 | 380 (173) | 35 x 34¾ x 88¾ | 889 x 883 x 2255 |

† Depth does not include 4¼" (108 mm) for ramp.

* Height does not include ¼" (7mm) for system mechanical components.

‡ Requires 115/208-240/60/1 Hz, single phase, 20 amp dedicated outlet.

note: STR/STA/STG2HRI-2S requires hard wiring.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.

STR/STA/STG ROLL-THRU HEATED CABINETS

| Model | # of Doors | Watts | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------------|-------------|-------|-------------------------|---------------------------------|---------------------------------|
| SOLID DOORS | | | | | |
| STR1HRT-1S-1S‡ | 1 fr / 1 bk | 2000 | 480 (218) | 35 x 37½ x 83¾ | 889 x 953 x 1975 |
| STR2HRT-2S-2S | 2 fr / 2 bk | 4000 | 825 (375) | 68 x 37½ x 83¾ | 1337 x 953 x 1975 |
| SOLID HALF DOORS | | | | | |
| STR1HRT89-1S-1S‡ | 1 fr / 1 bk | 2000 | 480 (218) | 35 x 37½ x 88¾ | 889 x 953 x 2255 |

† Depth does not include 4¼" (108 mm) for ramp.

* Height does not include ¼" (7mm) for system mechanical components.

‡ Requires 115/208-240/60/1 Hz, single phase, 20 amp dedicated outlet.

note: STR/STA/STG2HRT-2S-2S requires hard wiring.

note: Crated weight listed on the chart is for STR model, STA & STG versions may have different weights.



BAR REFRIGERATION



True's line of bar refrigerators offers multiple options to choose from. Whether it's temperature range, door type, or lighting color, True Bar refrigerators can be customized to fit the functionality and style of any bar.

TBR™/TDR™ NOMENCLATURE

Model Family

TBR™ | True Bar Refrigerator

TDR™ | True Draft Refrigerator

Type

RI | Reach-In

PT | Pass Thru

RO | Reach-In Panel Ready

PO | Pass Thru Panel Ready

Refrigeration System Side

L | Left

R | Right

Front Side Cabinet Type

S | Solid

G | Glass

1 | Sliding Glass

TBR72-RISZ1-L-B-GGG-1

Length

32" | 36" | One Section

48" | 52" | 60" | Two Section

72" | 84" | Three Section

92" | 108" | Four Section

Temperature

SZ1 | Single Zone (35°F)

SZ2 | Single Zone (55°F)

SZ3 | Single Zone (45°F)

Main Cabinet Finish

B | Black (Black Cabinet/
SS Countertop)

Z | Black (Black Cabinet/
Black Countertop*)

S | Stainless Steel

X | Custom

Voltage

1 | 115/60 Hz

2 | 220-40 / 50-60 Hz

***NOTE:** Black countertops not offered on the 108" models.



BAR REFRIGERATION REACH-IN & PASS-THRU, BLACK EXTERIOR

Solid & Glass, Swing & Slide Doors



TBR48-RISZ1-L-B-SS-1



TBR60-RISZ1-L-B-GG-1



TBR72-RISZ1-L-B-SSS-1



TBR108-RISZ1-L-B-GGGG-1

Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
 - Exterior - Black, powder coated cold-rolled steel with stainless steel countertop.
 - Interior - stainless steel floor and sides.
 - White LED Interior Lighting standard on solid door models. (14-color TruLumina® optional)
 - NSF/ANSI Standard 7 compliant for open food product.
 - Front Air Intake & Front Air Discharge.
 - 24" (610mm) depth makes for easy placement in tight areas. Conserves valuable work space.
 - Positive seal doors. (Excludes slide door models)
 - Each cabinet designed to accommodate a variety of beer kegs.
 - Leg levelers standard with 7 other castor/leg options for various heights.
 - Three (3) interior access ports.
 - All TBR models also available in right side compressor versions.
- Glass door models only...**
- Energy efficient, "Low-E", thermal glass doors.
 - 14-color TruLumina® standard on all glass door models.
- Pass-Thru models only...**
- Designed for convenient front and rear access for serving.



TBR™ BAR REFRIGERATION REACH-IN, BLACK EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS & LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TBR32-RISZ1-L-B-S-1 | 1 | 3 | ½ | 1.8 | 240 (109) | 32 x 24⅞ x 34¾ | 813 x 631 x 881 |
| TBR36-RISZ1-L-B-S-1 | 1 | 3 | ½ | 1.8 | 255 (116) | 36 x 24⅞ x 34¾ | 914 x 631 x 881 |
| TBR48-RISZ1-L-B-SS-1 | 2 | 6 | ½ | 1.8 | 320 (145) | 48 x 24⅞ x 34¾ | 1219 x 631 x 881 |
| TBR52-RISZ1-L-B-SS-1 | 2 | 6 | ½ | 1.8 | 355 (161) | 52 x 24⅞ x 34¾ | 1321 x 631 x 881 |
| TBR60-RISZ1-L-B-SS-1 | 2 | 6 | ¾ | 3.2 | 380 (173) | 60 x 24⅞ x 34¾ | 1524 x 631 x 881 |
| TBR72-RISZ1-L-B-SSS-1 | 3 | 9 | ¼ | 3.2 | 435 (198) | 72 x 24⅞ x 34¾ | 1829 x 631 x 881 |
| TBR84-RISZ1-L-B-SSS-1 | 3 | 9 | ¼ | 3.2 | 470 (214) | 84 x 24⅞ x 34¾ | 2134 x 631 x 881 |
| TBR92-RISZ1-L-B-SSSS-1 | 4 | 12 | ¼ | 3.2 | 510 (232) | 92 x 24⅞ x 34¾ | 2337 x 631 x 881 |
| TBR108-RISZ1-L-B-SSSS-1 | 4 | 12 | ¼ | 3.2 | 595 (270) | 108 x 24⅞ x 34¾ | 2744 x 631 x 881 |
| GLASS SWING DOORS & LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TBR32-RISZ1-L-B-G-1 | 1 | 3 | ½ | 1.8 | 245 (112) | 32 x 24⅞ x 34¾ | 813 x 631 x 881 |
| TBR36-RISZ1-L-B-G-1 | 1 | 3 | ½ | 1.8 | 285 (130) | 36 x 24⅞ x 34¾ | 915 x 631 x 881 |
| TBR48-RISZ1-L-B-GG-1 | 2 | 6 | ½ | 1.8 | 335 (152) | 48 x 24⅞ x 34¾ | 1219 x 631 x 881 |
| TBR52-RISZ1-L-B-GG-1 | 2 | 6 | ½ | 1.8 | 350 (159) | 52 x 24⅞ x 34¾ | 1321 x 631 x 881 |
| TBR60-RISZ1-L-B-GG-1 | 2 | 6 | ¾ | 3.2 | 390 (177) | 60 x 24⅞ x 34¾ | 1524 x 631 x 881 |
| TBR72-RISZ1-L-B-GGG-1 | 3 | 9 | ¼ | 3.2 | 445 (202) | 72 x 24⅞ x 34¾ | 1829 x 631 x 881 |
| TBR84-RISZ1-L-B-GGG-1 | 3 | 9 | ¼ | 3.2 | 470 (214) | 84 x 24⅞ x 34¾ | 2134 x 631 x 881 |
| TBR92-RISZ1-L-B-GGGG-1 | 4 | 12 | ¼ | 3.2 | 510 (232) | 92 x 24⅞ x 34¾ | 2337 x 631 x 881 |
| TBR108-RISZ1-L-B-GGGG-1 | 4 | 12 | ¼ | 3.2 | 610 (277) | 108 x 24⅞ x 34¾ | 2744 x 631 x 881 |
| GLASS SLIDE DOORS & LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TBR48-RISZ1-L-B-11-1 | 2 | 6 | ½ | 1.8 | 325 (148) | 48 x 24⅞ x 34¾ | 1219 x 631 x 881 |
| TBR52-RISZ1-L-B-11-1 | 2 | 6 | ½ | 1.8 | 350 (159) | 52 x 24⅞ x 34¾ | 1321 x 631 x 881 |
| TBR60-RISZ1-L-B-11-1 | 2 | 6 | ¾ | 3.2 | 385 (175) | 60 x 24⅞ x 34¾ | 1524 x 631 x 881 |
| TBR72-RISZ1-L-B-111-1 | 3 | 9 | ¼ | 3.2 | 445 (202) | 72 x 24⅞ x 34¾ | 1829 x 631 x 881 |

† Depth does not include 1½" (35mm) for swing door handles, ¾" (16mm) for slide door handles.

TBR™ BAR REFRIGERATION PASS-THRU, BLACK EXTERIOR


| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS (FRONT & REAR), LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TBR36-PTSZ1-L-B-S-S-1 | 2 | 3 | ½ | 1.8 | 265 (121) | 36 x 27 x 34¾ | 915 x 684 x 881 |
| TBR60-PTSZ1-L-B-SS-SS-1 | 4 | 6 | ¼ | 3.2 | 395 (180) | 60 x 27 x 34¾ | 684 x 684 x 881 |
| TBR84-PTSZ1-L-B-SSS-SSS-1 | 6 | 9 | ¼ | 3.2 | 470 (214) | 84 x 27 x 34¾ | 2134 x 684 x 881 |
| GLASS SWING DOORS (FRONT & REAR), LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TBR36-PTSZ1-L-B-G-G-1 | 2 | 3 | ½ | 1.8 | 265 (121) | 36 x 27 x 34¾ | 915 x 684 x 881 |
| TBR60-PTSZ1-L-B-GG-GG-1 | 4 | 6 | ¼ | 3.2 | 395 (180) | 60 x 27 x 34¾ | 1524 x 684 x 881 |
| TBR84-PTSZ1-L-B-GGG-GGG-1 | 3 | 9 | ¼ | 3.2 | 555 (252) | 84 x 24⅞ x 34¾ | 2134 x 631 x 881 |
| GLASS SLIDE DOORS (FRONT & REAR), LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TBR60-PTSZ1-L-B-11-11-1 | 2 | 6 | ¼ | 3.2 | 395 (180) | 60 x 24⅞ x 34¾ | 1524 x 631 x 881 |

† Depth does not include 1½" (35mm) for swing door handles, ¾" (16mm) for slide door handles.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



BAR REFRIGERATION REACH-IN & PASS-THRU, STAINLESS EXTERIOR *Solid & Glass, Swing & Slide Doors*

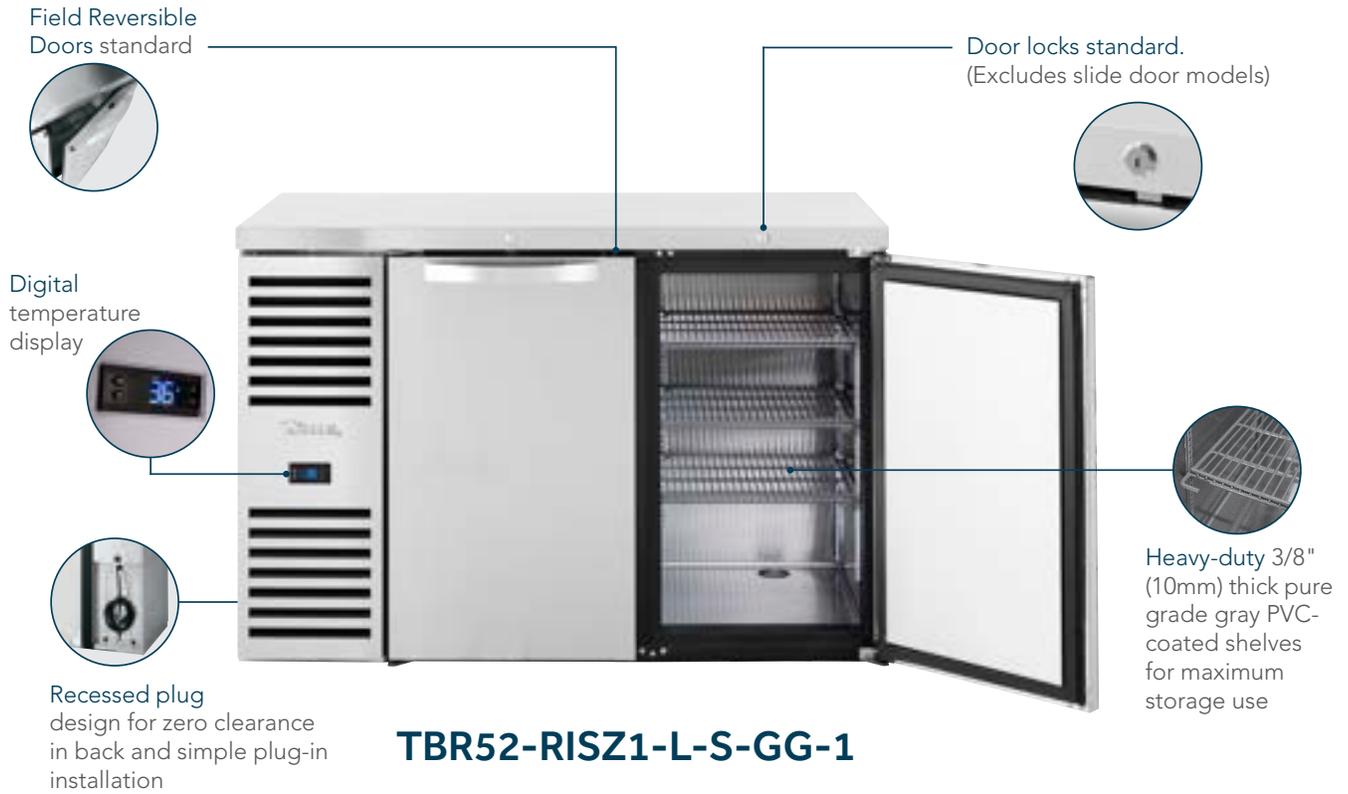

TBR48-RISZ1-L-S-GG-1



TBR52-RISZ1-L-S-11-1



TBR60-RISZ1-L-S-SS-1



TBR72-RISZ1-L-S-GGG-1

Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
 - Exterior - Stainless steel exterior for those who appreciate the value of stainless.
 - Interior - stainless steel floor and sides.
 - White LED Interior Lighting standard on solid door models. (optional 14-color TruLumina®)
 - NSF/ANSI Standard 7 compliant for open food product.
 - Front Air Intake & Front Air Discharge.
 - 24" (610mm) depth makes for easy placement in tight areas. Conserves valuable work space.
 - Positive seal doors. (Excludes slide door models)
 - Each cabinet designed to accommodate a variety of beer kegs. See our beer keg footprint brochure on our website.
 - Leg levelers standard with 7 other castor/leg options for various heights.
 - Three (3) interior access ports.
 - All TBR models also available in right side compressor versions.
- Glass door models only...**
- Energy efficient, "Low-E", thermal glass doors.
 - 14-color TruLumina® standard on all glass door models.
- Pass-Thru models only...**
- Designed for convenient front and rear access for serving.



TBR™ BAR REFRIGERATION REACH-IN, STAINLESS EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS & LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TBR32-RISZ1-L-S-S-1 | 1 | 3 | ½ | 1.8 | 240 (109) | 32 x 24¾ x 34¾ | 813 x 631 x 881 |
| TBR36-RISZ1-L-S-S-1 | 1 | 3 | ½ | 1.8 | 290 (132) | 36 x 24¾ x 34¾ | 914 x 631 x 881 |
| TBR48-RISZ1-L-S-SS-1 | 2 | 6 | ½ | 1.8 | 335 (152) | 48 x 24¾ x 34¾ | 1219 x 631 x 881 |
| TBR52-RISZ1-L-S-SS-1 | 2 | 6 | ½ | 1.8 | 355 (161) | 52 x 24¾ x 34¾ | 1321 x 631 x 881 |
| TBR60-RISZ1-L-S-SS-1 | 2 | 6 | ¾ | 3.2 | 395 (180) | 60 x 24¾ x 34¾ | 1524 x 631 x 881 |
| TBR72-RISZ1-L-S-SSS-1 | 3 | 9 | ¾ | 3.2 | 440 (200) | 72 x 24¾ x 34¾ | 1829 x 631 x 881 |
| TBR84-RISZ1-L-S-SSS-1 | 3 | 9 | ¾ | 3.2 | 470 (214) | 84 x 24¾ x 34¾ | 2134 x 631 x 881 |
| TBR92-RISZ1-L-S-SSSS-1 | 4 | 12 | ¾ | 3.2 | 510 (232) | 92 x 24¾ x 34¾ | 2337 x 631 x 881 |
| TBR108-RISZ1-L-S-SSSS-1 | 4 | 12 | ¾ | 3.2 | 630 (286) | 108 x 24¾ x 34¾ | 2744 x 631 x 881 |
| GLASS SWING DOORS & LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TBR32-RISZ1-L-S-G-1 | 1 | 3 | ½ | 1.8 | 290 (132) | 32 x 24¾ x 34¾ | 813 x 631 x 881 |
| TBR36-RISZ1-L-S-G-1 | 1 | 3 | ½ | 1.8 | 290 (132) | 36 x 24¾ x 34¾ | 915 x 631 x 881 |
| TBR48-RISZ1-L-S-GG-1 | 2 | 6 | ½ | 1.8 | 335 (152) | 48 x 24¾ x 34¾ | 1219 x 631 x 881 |
| TBR52-RISZ1-L-S-GG-1 | 2 | 6 | ½ | 1.8 | 365 (166) | 52 x 24¾ x 34¾ | 1321 x 631 x 881 |
| TBR60-RISZ1-L-S-GG-1 | 2 | 6 | ¾ | 3.2 | 395 (180) | 60 x 24¾ x 34¾ | 1524 x 631 x 881 |
| TBR72-RISZ1-L-S-GGG-1 | 3 | 9 | ¾ | 3.2 | 440 (200) | 72 x 24¾ x 34¾ | 1829 x 631 x 881 |
| TBR84-RISZ1-L-S-GGG-1 | 3 | 9 | ¾ | 3.2 | 470 (214) | 84 x 24¾ x 34¾ | 2134 x 631 x 881 |
| TBR92-RISZ1-L-S-GGGG-1 | 4 | 12 | ¾ | 3.2 | 510 (232) | 92 x 24¾ x 34¾ | 2337 x 631 x 881 |
| TBR108-RISZ1-L-S-GGGG-1 | 4 | 12 | ¾ | 3.2 | 610 (277) | 108 x 24¾ x 34¾ | 2744 x 631 x 881 |
| GLASS SLIDE DOORS & LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TBR48-RISZ1-L-S-11-1 | 2 | 6 | ½ | 1.8 | 330 (150) | 48 x 24¾ x 34¾ | 1219 x 631 x 881 |
| TBR52-RISZ1-L-S-11-1 | 2 | 6 | ½ | 1.8 | 350 (159) | 52 x 24¾ x 34¾ | 1321 x 631 x 881 |
| TBR60-RISZ1-L-S-11-1 | 2 | 6 | ¾ | 3.2 | 395 (180) | 60 x 24¾ x 34¾ | 1524 x 631 x 881 |
| TBR72-RISZ1-L-S-111-1 | 3 | 9 | ¾ | 3.2 | 450 (205) | 72 x 24¾ x 34¾ | 1829 x 631 x 881 |

† Depth does not include 1½" (35mm) for swing door handles, ¾" (16mm) for slide door handles.

TBR™ BAR REFRIGERATION PASS-THRU, STAINLESS EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS (FRONT & REAR), LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TBR36-PTSZ1-L-S-S-S-1 | 2 | 3 | ½ | 1.8 | 290 (132) | 36 x 27 x 34¾ | 915 x 684 x 881 |
| TBR60-PTSZ1-L-S-SS-SS-1 | 4 | 6 | ¾ | 3.2 | 395 (180) | 60 x 27 x 34¾ | 1524 x 684 x 881 |
| TBR84-PTSZ1-L-S-SSS-SSS-1 | 6 | 9 | ¾ | 3.2 | 470 (214) | 84 x 27 x 34¾ | 2134 x 684 x 881 |
| GLASS SWING DOORS (FRONT & REAR), LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TBR36-PTSZ1-L-S-G-G-1 | 2 | 3 | ½ | 1.8 | 290 (132) | 36 x 27 x 34¾ | 915 x 684 x 881 |
| TBR60-PTSZ1-L-S-GG-GG-1 | 4 | 6 | ¾ | 3.2 | 395 (180) | 60 x 27 x 34¾ | 1524 x 684 x 881 |
| TBR84-PTSZ1-L-S-GGG-GGG-1 | 3 | 9 | ¾ | 3.2 | 535 (243) | 84 x 24¾ x 34¾ | 2134 x 631 x 881 |
| GLASS SLIDE DOORS (FRONT & REAR), LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TBR60-PTSZ1-L-S-11-11-1 | 2 | 6 | ¾ | 3.2 | 395 (180) | 60 x 24¾ x 34¾ | 1524 x 631 x 881 |

† Depth does not include 1½" (35mm) for swing door handles, ¾" (16mm) for slide door handles.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



BACK BAR REACH-IN, STAINLESS TOP, BLACK & STAINLESS EXTERIOR *Solid & Glass, Swing Doors*



TBB-2G-HC-LD



TBB-1-HC



TBB-2G-S-HC



TBB-3G-HC



TBB-4PT-S

Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
- Exterior - Black, powder coated cold-rolled steel with stainless steel countertop.
- Interior - Stainless steel floor with 1/2" (13mm) lip & heavy galvanized steel walls.
- Recessed handles on solid door models.
- LED interior lighting.
- Air vents on side to maximize flow of fresh air through condenser.
- Positive seal doors.
- Self-contained installation.
- Available with optional legs or 2 1/2" (64mm) or 4" (102mm) diameter castors (TBB-1 & TBB-1-S: 4" diameter castors standard equipment; 2 1/2" (64mm) diameter castors & legs not available).

Glass door models have...

- Energy efficient, "Low-E", thermal glass doors.
- Extruded, aluminum door frames on glass doors.
- LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

Pass-Thru models have...

- Designed for convenient front and rear access for serving.

Stainless Steel models have...

- Heavy duty stainless steel exterior and countertop.



TBB® BACK BAR REACH-IN, STAINLESS TOP, BLACK EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------------|------------|--------------|------|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS | | | | | | | |
| TBB-1-HC | 1 | 2 | 1/10 | 1.4 | 210 (96) | 23½ x 31¾ x 38¾ | 597 x 810 x 985 |
| TBB-2-HC | 2 | 4 | ¼ | 2.8 | 360 (164) | 58¾ x 27¾ x 37 | 1496 x 705 x 940 |
| TBB-3-HC | 2 | 4 | ¼ | 2.8 | 400 (182) | 69½ x 27¾ x 37 | 1756 x 705 x 940 |
| TBB-4-HC | 3 | 6 | ¼ | 2.8 | 485 (220) | 90¾ x 27¾ x 37 | 2296 x 705 x 940 |
| GLASS SWING DOORS | | | | | | | |
| TBB-2G-HC-LD | 2 | 4 | ¼ | 2.8 | 365 (166) | 58¾ x 27¾ x 37 | 1496 x 705 x 940 |
| TBB-3G-HC-LD | 2 | 4 | ¼ | 2.8 | 440 (200) | 69½ x 27¾ x 37 | 1756 x 705 x 940 |
| TBB-4G-HC-LD | 3 | 6 | ¼ | 2.8 | 595 (270) | 90¾ x 27¾ x 37 | 2296 x 705 x 940 |

† Depth does not include 1¾" (35mm) for door handle (glass door models) or 1" (26mm) for rear bumpers (excludes TBB-1-HC).
 note: TBB-2G-HC-LD not available with door locks.

TBB® BACK BAR PASS-THRU, STAINLESS TOP, BLACK EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|-------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS (FRONT & REAR) | | | | | | | |
| TBB-4PT-HC | 3 fr / 3 bk | 6 | ¼ | 2.9 | 580 (263) | 90¾ x 31 x 37 | 2296 x 788 x 940 |

TBB® BACK BAR REACH-IN, STAINLESS TOP, STAINLESS EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------------|------------|--------------|------|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS | | | | | | | |
| TBB-1-S-HC | 1 | 2 | 1/10 | 1.4 | 210 (96) | 23½ x 31¾ x 38¾ | 597 x 810 x 985 |
| TBB-2-S-HC | 2 | 4 | ¼ | 2.8 | 385 (175) | 58¾ x 27¾ x 37 | 1496 x 705 x 940 |
| TBB-3-S-HC | 2 | 4 | ¼ | 2.8 | 415 (189) | 69½ x 27¾ x 37 | 1756 x 705 x 940 |
| TBB-4-S-HC | 3 | 6 | ¼ | 2.8 | 530 (241) | 90¾ x 27¾ x 37 | 2296 x 705 x 940 |
| GLASS SWING DOORS | | | | | | | |
| TBB-2G-S-HC-LD | 2 | 4 | ¼ | 2.8 | 395 (180) | 58¾ x 27¾ x 37 | 1496 x 705 x 940 |
| TBB-3G-S-HC-LD | 2 | 4 | ¼ | 2.8 | 440 (200) | 69½ x 27¾ x 37 | 1756 x 705 x 940 |
| TBB-4G-S-HC-LD | 3 | 6 | ¼ | 2.8 | 595 (270) | 90¾ x 27¾ x 37 | 2296 x 705 x 940 |

† Depth does not include 1¾" (35mm) for door handle (glass door models) or 1" (26mm) for rear bumpers (excludes TBB-1-S-HC).
 note: TBB-2G-S-HC-LD not available with door locks.

TBB® BACK BAR PASS-THRU, STAINLESS TOP, STAINLESS EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|-------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS (FRONT & REAR) | | | | | | | |
| TBB-4PT-S-HC | 3 fr / 3 bk | 6 | ¼ | 2.9 | 585 (266) | 90¾ x 31 x 37 | 2296 x 788 x 940 |

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.





Bar Refrigeration | TBB[®]24

BACK BAR REACH-IN, STAINLESS TOP, BLACK & STAINLESS EXTERIOR *Solid & Glass, Swing Doors*

TBB24 models feature a finished stainless steel top (SFT) providing an excellent work or storage area, or a black sub-top (BST) feature designed to slide under existing cabinetry providing a built-in look



Door locks - standard



3/8" (10mm) thick, heavy-duty, PVC-coated wire shelving. Two shelves per door on two door models. Three door models feature two shelves for the right door and two long shelves which span both the left and center doors



TBB24-48-2G-Z1-SFT-B-1



TBB24-48-2S-Z1-BST-S-1



TBB24-60-2S-Z1-SFT-B-1



TBB24-60-2G-Z1-SFT-S-1



TBB24-72-3G-Z1-BST-B-1

Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
 - 24" (610mm) depth makes for easy placement in tight areas. Conserves valuable work space.
 - Exterior - Black, powder coated cold-rolled steel with stainless steel countertop or black sub-top..
 - Interior - Stainless steel floor with heavy gauge galvanized steel walls.
 - Recessed handles on solid door models.
 - Interior LED lighting.
 - NSF/ANSI Standard 7 compliant for packaged and bottle product.
 - Air vents on side to maximize flow of fresh air through condenser.
 - Optional wine racks, wine or beer organizers available.
 - Positive seal doors.
 - Self-contained system.
 - Ideal for bottle beer or can accommodate a variety of beer kegs.
 - Available with optional legs or 2½" (64mm) or 4" (102mm) diameter castors.
- Glass door models have...**
- Energy efficient, "Low-E", thermal glass doors.
 - Extruded, aluminum door frames on glass doors.
 - Glass doors fitted with flat top door handles.
- Stainless Steel models have...**
- Heavy duty stainless steel exterior and countertop.



TBB[®]24 BACK BAR REACH-IN, STAINLESS FINISHED TOP, BLACK EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------------|------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS | | | | | | | |
| TBB24-48-2S-Z1-SFT-B-1 | 2 | 4 | 1/5 | 1.8 | 290 (132) | 48 7/8 x 24 7/8 x 34 3/4 | 1220 x 632 x 882 |
| TBB24-60-2S-Z1-SFT-B-1 | 2 | 4 | 1/4 | 3.2 | 345 (157) | 60 7/8 x 24 7/8 x 34 3/4 | 1525 x 632 x 882 |
| TBB24-72-3S-Z1-SFT-B-1 | 3 | 6 | 1/4 | 3.2 | 415 (189) | 72 7/8 x 24 7/8 x 34 3/4 | 1829 x 632 x 882 |
| GLASS SWING DOORS | | | | | | | |
| TBB24-48-2G-Z1-SFT-B-1 | 2 | 4 | 1/5 | 1.8 | 290 (132) | 48 7/8 x 24 7/8 x 34 3/4 | 1220 x 632 x 882 |
| TBB24-60-2G-Z1-SFT-B-1 | 2 | 4 | 1/4 | 3.2 | 345 (157) | 60 7/8 x 24 7/8 x 34 3/4 | 1525 x 632 x 882 |
| TBB24-72-3G-Z1-SFT-B-1 | 3 | 6 | 1/4 | 3.2 | 415 (189) | 72 7/8 x 24 7/8 x 34 3/4 | 1829 x 632 x 882 |

† Depth does not include 1 1/2" (39mm) for flat top door handle (glass door models).

* Height does not include 1/4" (7mm) for leg levelers.

TBB[®]24 BACK BAR REACH-IN, STAINLESS FINISHED TOP, STAINLESS EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------------|------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS | | | | | | | |
| TBB24-48-2S-Z1-SFT-S-1 | 2 | 4 | 1/5 | 1.8 | 290 (132) | 48 7/8 x 24 7/8 x 34 3/4 | 1220 x 632 x 882 |
| TBB24-60-2S-Z1-SFT-S-1 | 2 | 4 | 1/4 | 3.2 | 345 (157) | 60 7/8 x 24 7/8 x 34 3/4 | 1525 x 632 x 882 |
| TBB24-72-3S-Z1-SFT-S-1 | 3 | 6 | 1/4 | 3.2 | 415 (189) | 72 7/8 x 24 7/8 x 34 3/4 | 1829 x 632 x 882 |
| GLASS SWING DOORS | | | | | | | |
| TBB24-48-2G-Z1-SFT-S-1 | 2 | 4 | 1/5 | 1.8 | 290 (132) | 48 7/8 x 24 7/8 x 34 3/4 | 1220 x 632 x 882 |
| TBB24-60-2G-Z1-SFT-S-1 | 2 | 4 | 1/4 | 3.2 | 345 (157) | 60 7/8 x 24 7/8 x 34 3/4 | 1525 x 632 x 882 |
| TBB24-72-3G-Z1-SFT-S-1 | 3 | 6 | 1/4 | 3.2 | 415 (189) | 72 7/8 x 24 7/8 x 34 3/4 | 1829 x 632 x 882 |

† Depth does not include 1 1/2" (39mm) for flat top door handle (glass door models).

* Height does not include 1/4" (7mm) for leg levelers.

TBB[®]24 BACK BAR REACH-IN, BLACK SUB-TOP, BLACK EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------------|------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS | | | | | | | |
| TBB24-48-2S-Z1-BST-B-1 | 2 | 4 | 1/5 | 1.8 | 290 (132) | 48 7/8 x 24 7/8 x 34 1/4 | 1220 x 632 x 870 |
| TBB24-60-2S-Z1-BST-B-1 | 2 | 4 | 1/4 | 3.2 | 345 (157) | 60 7/8 x 24 7/8 x 34 1/4 | 1525 x 632 x 870 |
| TBB24-72-3S-Z1-BST-B-1 | 3 | 6 | 1/4 | 3.2 | 415 (189) | 72 7/8 x 24 7/8 x 34 1/4 | 1829 x 632 x 870 |
| GLASS SWING DOORS | | | | | | | |
| TBB24-48-2G-Z1-BST-B-1 | 2 | 4 | 1/5 | 1.8 | 290 (132) | 48 7/8 x 24 7/8 x 34 1/4 | 1220 x 632 x 870 |
| TBB24-60-2G-Z1-BST-B-1 | 2 | 4 | 1/4 | 3.2 | 345 (157) | 59 7/8 x 23 3/4 x 34 1/4 | 1521 x 616 x 870 |
| TBB24-72-3G-Z1-BST-B-1 | 3 | 6 | 1/4 | 3.2 | 415 (189) | 72 7/8 x 24 7/8 x 34 1/4 | 1829 x 632 x 870 |

† Depth does not include 1 1/2" (39mm) for flat top door handle (glass door models).

* Height does not include 1/4" (7mm) for leg levelers.

TBB[®]24 BACK BAR REACH-IN, BLACK SUB-TOP, STAINLESS EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--------------------------|------------|--------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS | | | | | | | |
| TBB24-48-2S-Z1-BST-S-1 | 2 | 4 | 1/5 | 1.8 | 290 (132) | 48 7/8 x 24 7/8 x 34 1/4 | 1220 x 632 x 870 |
| TBB24-60-2S-Z1-BST-S-1 | 2 | 4 | 1/4 | 3.2 | 345 (157) | 60 7/8 x 24 7/8 x 34 1/4 | 1525 x 632 x 870 |
| TBB24-72-3S-Z1-BST-S-1 | 3 | 6 | 1/4 | 3.2 | 415 (189) | 72 7/8 x 24 7/8 x 34 1/4 | 1829 x 632 x 870 |
| GLASS SWING DOORS | | | | | | | |
| TBB24-48-2G-Z1-BST-S-1 | 2 | 4 | 1/5 | 1.8 | 290 (132) | 48 7/8 x 24 7/8 x 34 1/4 | 1220 x 632 x 870 |
| TBB24-60-2G-Z1-BST-S-1 | 2 | 4 | 1/4 | 3.2 | 345 (157) | 60 7/8 x 24 7/8 x 34 1/4 | 1525 x 632 x 870 |
| TBB24-72-3G-Z1-BST-S-1 | 3 | 6 | 1/4 | 3.2 | 415 (189) | 72 7/8 x 24 7/8 x 34 1/4 | 1829 x 632 x 870 |

† Depth does not include 1 1/2" (39mm) for flat top door handle (glass door models).

* Height does not include 1/4" (7mm) for leg levelers.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



DRAFT REFRIGERATION REACH-IN & PASS-THRU, BLACK EXTERIOR

Solid & Glass, Swing Doors



TDR32-RISZ1-L-B-S-1



TDR60-RISZ1-L-B-SS-1



TDR84-RISZ1-L-B-SSS-1



TDR108-RISZ1-L-B-SSSS-1

Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
 - Exterior - Black, powder coated cold-rolled steel with stainless steel countertop.
 - Interior - stainless steel floor and sides.
 - Insulated and chilled draft columns.
 - Fan motors direct large volume of cold air into draft columns.
 - White LED Interior Lighting for excellent visibility. (optional 14-color TruLumina® on glass and solid door combos)
 - NSF/ANSI Standard 7 compliant for packaged and bottled product.
 - Zero clearance recessed plug and front breathing.
 - 24" (610mm) depth makes for easy placement in tight areas. Conserves valuable work space.
 - Positive seal doors.
 - Each cabinet designed to accommodate a variety of beer kegs. See keg brochure on website for details.
 - Leg levelers standard with 7 other castor/leg options for various heights.
 - Three (3) interior access ports.
 - All TDR models also available in right side compressor versions.
- Glass door models only...**
- Shelves included.
 - Energy efficient, "Low-E", thermal glass doors.
 - 14-color TruLumina® lighting standard.
- Pass-Thru models only...**
- Designed for convenient front and rear access for serving.



TDR™ DRAFT REFRIGERATION, BLACK EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS & LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TDR32-RISZ1-L-B-S-1 | 1 | 0 | ½ | 1.8 | 240 (109) | 32 x 24⅞ x 34¾ | 813 x 631 x 881 |
| TDR36-RISZ1-L-B-S-1 | 1 | 0 | ½ | 1.8 | 270 (123) | 36 x 24⅞ x 34¾ | 914 x 631 x 881 |
| TDR48-RISZ1-L-B-SS-1 | 2 | 0 | ½ | 1.8 | 310 (141) | 48 x 24⅞ x 34¾ | 1219 x 631 x 881 |
| TDR52-RISZ1-L-B-SS-1 | 2 | 0 | ½ | 1.8 | 320 (146) | 52 x 24⅞ x 34¾ | 1321 x 631 x 881 |
| TDR60-RISZ1-L-B-SS-1 | 2 | 0 | ¼ | 3.2 | 330 (150) | 60 x 24⅞ x 34¾ | 1524 x 631 x 881 |
| TDR72-RISZ1-L-B-SSS-1 | 3 | 0 | ¼ | 3.2 | 395 (180) | 72 x 24⅞ x 34¾ | 1829 x 631 x 881 |
| TDR84-RISZ1-L-B-SSS-1 | 3 | 0 | ¼ | 3.2 | 440 (200) | 84 x 24⅞ x 34¾ | 2134 x 631 x 881 |
| TDR92-RISZ1-L-B-SSSS-1 | 4 | 0 | ¼ | 3.2 | 475 (215) | 92 x 24⅞ x 34¾ | 2337 x 631 x 881 |
| TDR108-RISZ1-L-B-SSSS-1 | 4 | 0 | ¼ | 3.2 | 535 (243) | 108 x 24⅞ x 34¾ | 2744 x 631 x 881 |
| COMBO SOLID & GLASS SWING DOORS, LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TDR48-RISZ1-L-B-SG-1 | 2 | 3 | ½ | 1.8 | 320 (146) | 48 x 24⅞ x 34¾ | 1219 x 631 x 881 |
| TDR52-RISZ1-L-B-SG-1 | 2 | 3 | ½ | 1.8 | 365 (166) | 52 x 24⅞ x 34¾ | 1321 x 631 x 881 |

† Depth does not include 1½" (39mm) for swing door handles.

* Height does not include 15¾" (400mm) for draft tower.

TDR™ DRAFT REFRIGERATION PASS-THRU, BLACK EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|------------|--------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS & LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TDR36-PTSZ1-L-B-S-S-1 | 2 | 0 | ½ | 1.8 | 270 (122) | 36 x 24⅞ x 34¾ | 914 x 631 x 881 |
| TDR60-PTSZ1-L-B-SS-SS-1 | 4 | 0 | ¼ | 3.2 | 365 (166) | 60 x 24⅞ x 34¾ | 1524 x 631 x 881 |
| TDR84-PTSZ1-L-B-SSS-SSS-1 | 6 | 0 | ¼ | 3.2 | 490 (222) | 84 x 24⅞ x 34¾ | 2134 x 631 x 881 |

† Depth does not include 1½" (39mm) for swing door handles.

* Height does not include 15¾" (400mm) for draft tower.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



DRAFT REFRIGERATION REACH-IN & PASS-THRU, STAINLESS EXTERIOR *Solid & Glass, Swing Doors*



TDR36-RISZ1-L-S-S-1



TDR52-RISZ1-L-S-SG-1



TDR72-RISZ1-L-S-SSS-1



TDR92-RISZ1-L-S-SSSS-1

Features/Benefits

- Maintains cold 33°F to 38°F (0.5°C to 3.3°C) product temperatures.
 - Exterior - Black, powder coated cold-rolled steel with stainless steel countertop.
 - Interior - stainless steel floor and sides.
 - Insulated and chilled draft columns.
 - Fan motors direct large volume of cold air into draft columns.
 - White LED Interior Lighting for excellent visibility. (optional 14-color TruLumina® on glass and solid door combos)
 - NSF/ANSI Standard 7 compliant for packaged and bottled product.
 - Zero clearance recessed plug and front breathing.
 - 24" (610mm) depth makes for easy placement in tight areas. Conserves valuable work space.
 - Positive seal doors.
 - Each cabinet designed to accommodate a variety of beer kegs. See keg brochure on website for details.
 - Leg levelers standard with 7 other castor/leg options for various heights.
 - Three (3) interior access ports.
 - All TDR models also available in right side compressor versions.
- Glass door models only...**
- Shelves included.
 - Energy efficient, "Low-E", thermal glass doors.
 - 14-color TruLumina® lighting standard.
- Pass-Thru models only...**
- Designed for convenient front and rear access for serving.



TDR™ DRAFT REFRIGERATION REACH-IN, STAINLESS EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|--|------------|--------------|----|------|-------------------------|---|---------------------------------|
| SOLID SWING DOORS & LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TDR32-RISZ1-L-S-S-1 | 1 | 0 | ½ | 1.8 | 240 (109) | 32 x 24 ⁷ / ₈ x 34 ³ / ₄ | 813 x 631 x 881 |
| TDR36-RISZ1-L-S-S-1 | 1 | 0 | ½ | 1.8 | 270 (123) | 36 x 24 ⁷ / ₈ x 34 ³ / ₄ | 914 x 631 x 881 |
| TDR48-RISZ1-L-S-SS-1 | 2 | 0 | ½ | 1.8 | 320 (146) | 48 x 24 ⁷ / ₈ x 34 ³ / ₄ | 1219 x 631 x 881 |
| TDR52-RISZ1-L-S-SS-1 | 2 | 0 | ½ | 1.8 | 355 (161) | 52 x 24 ⁷ / ₈ x 34 ³ / ₄ | 1321 x 631 x 881 |
| TDR60-RISZ1-L-S-SS-1 | 2 | 0 | ¼ | 3.2 | 330 (150) | 60 x 24 ⁷ / ₈ x 34 ³ / ₄ | 1524 x 631 x 881 |
| TDR72-RISZ1-L-S-SSS-1 | 3 | 0 | ¼ | 3.2 | 395 (179) | 72 x 24 ⁷ / ₈ x 34 ³ / ₄ | 1829 x 631 x 881 |
| TDR84-RISZ1-L-S-SSS-1 | 3 | 0 | ¼ | 3.2 | 440 (200) | 84 x 24 ⁷ / ₈ x 34 ³ / ₄ | 2134 x 631 x 881 |
| TDR92-RISZ1-L-S-SSSS-1 | 4 | 0 | ¼ | 3.2 | 475 (215) | 92 x 24 ⁷ / ₈ x 34 ³ / ₄ | 2337 x 631 x 881 |
| TDR108-RISZ1-L-S-SSSS-1 | 4 | 0 | ¼ | 3.2 | 535 (243) | 108 x 24 ⁷ / ₈ x 34 ³ / ₄ | 2744 x 631 x 881 |
| COMBO SOLID & GLASS SWING DOORS, LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TDR48-RISZ1-L-S-SG-1 | 2 | 3 | ½ | 1.8 | 330 (150) | 48 x 24 ⁷ / ₈ x 34 ³ / ₄ | 1219 x 631 x 881 |
| TDR52-RISZ1-L-S-SG-1 | 2 | 3 | ½ | 1.8 | 365 (166) | 52 x 24 ⁷ / ₈ x 34 ³ / ₄ | 1321 x 631 x 881 |

† Depth does not include 1½" (39mm) for swing door handles.

* Height does not include 15¾" (400mm) for draft tower.

TDR™ DRAFT REFRIGERATION PASS-THRU, STAINLESS EXTERIOR

| Model | # of Doors | # of Shelves | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|------------|--------------|----|------|-------------------------|--|---------------------------------|
| SOLID SWING DOORS & LEFT SIDE REFRIGERATION SYSTEM | | | | | | | |
| TDR36-PTSZ1-L-S-S-1 | 2 | 0 | ½ | 1.8 | 270 (122) | 36 x 24 ⁷ / ₈ x 34 ³ / ₄ | 914 x 631 x 881 |
| TDR60-PTSZ1-L-S-SS-SS-1 | 4 | 0 | ¼ | 3.2 | 365 (166) | 60 x 24 ⁷ / ₈ x 34 ³ / ₄ | 1524 x 631 x 881 |
| TDR84-PTSZ1-L-S-SSS-SSS-1 | 6 | 0 | ¼ | 3.2 | 490 (222) | 84 x 24 ⁷ / ₈ x 34 ³ / ₄ | 2134 x 631 x 881 |

† Depth does not include 1½" (39mm) for swing door handles.

* Height does not include 15¾" (400mm) for draft tower.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



DIRECT DRAW BEER DISPENSERS, BLACK & STAINLESS EXTERIORS

Solid Swing Doors



TDD-1-HC



TDD-3-HC



TDD-3CT-HC



TDD-4-S-HC

Features/Benefits

- Provides ice cold products 33°F to 38°F (0.5°C to 3.3°C) (normal ambient conditions).
- Exterior - Black, powder coated cold-rolled steel with stainless steel countertop.
- Interior - Stainless steel floor with ½" (13mm) lip & heavy galvanized steel walls.
- Insulated and chilled draft columns.
- LED interior lighting.
- NSF/ANSI Standard 7 compliant for open food product.
- Air vents on side to maximize flow of fresh air through condenser.
- Positive seal doors.
- Self-contained system.
- Each cabinet designed to accommodate a variety of beer kegs. See keg brochure on website for details.

- Available with optional legs or 2½" (64mm) or 4" (102mm) diameter castors (TDD-1-HC/1-S-HC: 4" (102mm) diameter castors standard equipment; 2½" (64mm) diameter castors & legs not available).

Club-Top models have...

- One, 3/8" (10mm) easy to reach, heavy-duty, black PVC-coated wire refrigerated storage shelf for chilled beer or wine glasses.
- Anodized aluminum glass rail provides convenient storage area for glasses on top.
- Convenient easy-glide lid.
- Flip-lock to secure stainless steel lid.

Stainless Steel models have...

- Stainless steel exterior and countertop for those who appreciate the value of stainless.



TDD™ DIRECT DRAW BEER DISPENSERS, STAINLESS TOP, BLACK EXTERIOR

| Model | # of Doors | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------|------------|------|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS | | | | | | |
| TDD-1-HC | 1 | 1/10 | 1.4 | 205 (93) | 23½ x 31¼ x 39¾ | 597 x 794 x 1010 |
| TDD-2-HC | 2 | ¼ | 2.8 | 330 (150) | 58⅞ x 27⅞ x 37 | 1496 x 689 x 940 |
| TDD-3-HC | 2 | ¼ | 2.8 | 365 (166) | 69⅞ x 27⅞ x 37 | 1756 x 689 x 940 |
| TDD-4-HC | 3 | ¼ | 2.8 | 445 (225) | 90⅝ x 27⅞ x 37 | 2296 x 689 x 940 |

† Depth does not include 1" (26mm) for rear bumpers (excludes TDD-1-HC).

* Height does not include 15¼" (388mm) for draft arm.

TDD™ DIRECT DRAW BEER DISPENSERS, STAINLESS EXTERIOR

| Model | # of Doors | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------|------------|------|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS | | | | | | |
| TDD-1-S-HC | 1 | 1/10 | 1.4 | 215 (98) | 23½ x 31¼ x 39¾ | 597 x 794 x 1010 |
| TDD-2-S-HC | 2 | ¼ | 2.8 | 330 (150) | 58⅞ x 27⅞ x 37 | 1496 x 689 x 940 |
| TDD-3-S-HC | 2 | ¼ | 2.8 | 360 (164) | 69⅞ x 27⅞ x 37 | 1756 x 689 x 940 |
| TDD-4-S-HC | 3 | ¼ | 2.8 | 405 (184) | 90⅝ x 27⅞ x 37 | 2296 x 689 x 940 |

† Depth does not include 1" (26mm) for rear bumpers (excludes TDD-1-S-HC).

* Height does not include 15¼" (388mm) for draft arm.

TDD™ CLUB-TOP DIRECT DRAW BEER DISPENSERS, STAINLESS TOP, BLACK EXTERIOR

| Model | # of Doors | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------|------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS | | | | | | |
| TDD-2CT-HC | 2 | ¼ | 2.8 | 350 (159) | 58⅞ x 27⅞ x 38½ | 1496 x 689 x 940 |
| TDD-3CT-HC | 2 | ¼ | 2.8 | 385 (175) | 69⅞ x 27⅞ x 38½ | 1756 x 689 x 940 |
| TDD-4CT-HC | 3 | ¼ | 2.8 | 465 (211) | 90⅝ x 27⅞ x 38½ | 2296 x 689 x 940 |

† Depth does not include 1" (26mm) for rear bumpers.

* Height does not include 13¾" (350mm) for draft arm.

TDD™ CLUB-TOP DIRECT DRAW BEER DISPENSERS, STAINLESS TOP, STAINLESS EXTERIOR

| Model | # of Doors | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|-------------------|------------|----|------|-------------------------|---------------------------------|---------------------------------|
| SOLID SWING DOORS | | | | | | |
| TDD-2CT-S-HC | 2 | ¼ | 2.8 | 350 (159) | 58⅞ x 27⅞ x 38½ | 1496 x 689 x 940 |
| TDD-3CT-S-HC | 2 | ¼ | 2.8 | 385 (175) | 69⅞ x 27⅞ x 38½ | 1756 x 689 x 940 |
| TDD-4CT-S-HC | 3 | ¼ | 2.8 | 485 (220) | 90⅝ x 27⅞ x 38½ | 2296 x 689 x 940 |

† Depth does not include 1" (26mm) for rear bumpers.

* Height does not include 13¾" (350mm) for draft arm.

TDD™ NITRO KIT MODELS

Sold Separately. See "accessories" section for additional individual nomenclature.

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



HORIZONTAL BOTTLE COOLERS - DEEP WELL & GLASS & PLATE CHILLERS/FROSTERS

Solid Slide Lids

Heavy-duty 3/8" (10mm) thick pure grade PVC-coated adjustable bin dividers for maximum storage use



Heavy-duty PVC-coated wire shelves for maximum flexibility



Huge capacity requires minimum floor space



Largest storage capacity in the industry - meets supply and demand requirements during peak hours

TD-36-12-HC

T-36-GC-S-HC



TD-24-7-HC



TD-50-18-S-HC



TD-80-30-HC



T-36-GC-HC



T-50-GC-S-HC

Features/Benefits

Horizontal Bottle Coolers - Deep Well

- Provides ice cold products 33°F to 38°F (0.5°C to 3.3°C) – very fast pull-down capacity.
- Positive guided, forced air cooling - cools bottles on top first.
- Exterior - Black, powder coated cold-rolled steel with stainless steel countertop and lids.
- Interior - long lasting heavy-duty galvanized steel. Complies with NSF/ANSI Standard 7 for packaged and bottled product.
- LED interior lighting.
- Huge capacity requires minimum floor space.
- Rugged, removable, bottle cap opener and cap catcher included. Field installed.
- Self-contained system.
- Available with optional 6" (153mm) legs or 3" (77mm) or 2½" (64mm) diameter castors.

Glass & Plate Chillers/Frosters

- Save time - load glasses dry and frost even faster with temperature 0°F (-17.8°C) and below.
 - Exterior - Black, powder coated cold-rolled steel with stainless steel countertop and lids.
 - Interior - long lasting heavy-duty galvanized steel.
 - Listed under NSF/ANSI standard 7 for the storage and/or display of packaged or bottled product..
 - Automatic defrost system time-initiated, time-terminated.
 - Self-contained system.
 - Available with optional legs or 3" (77mm) or 2½" (64mm) diameter castors.
 - Available with optional ratchet locks for added security.
- Stainless Steel models have...**
- Stainless steel exterior and countertop for those who appreciate the value of stainless.



TD™ HORIZONTAL BOTTLE COOLERS - DEEP WELL

| Model | # of Lids | # of Dividers | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---------------------------|-----------|---------------|------|------|-------------------------|---------------------------------|---------------------------------|
| BLACK EXTERIOR | | | | | | | |
| TD-24-7-HC | 1 | 2 | 1/10 | 1.4 | 180 (82) | 24½ x 26⅞ x 33½ | 623 x 683 x 850 |
| TD-36-12-HC | 1 | 2 | 1/10 | 1.4 | 230 (105) | 36⅞ x 26⅞ x 33½ | 931 x 683 x 850 |
| TD-50-18-HC | 2 | 3 | 1/5 | 1.9 | 280 (128) | 49½ x 26⅞ x 33½ | 1255 x 683 x 850 |
| TD-65-24-HC | 2 | 4 | 1/5 | 1.9 | 370 (168) | 64½ x 26⅞ x 33½ | 1636 x 683 x 850 |
| TD-80-30-HC | 3 | 6 | 1/4 | 2.8 | 415 (188) | 80⅞ x 26⅞ x 33½ | 2035 x 683 x 850 |
| TD-95-38-HC | 3 | 7 | 1/4 | 3.1 | 480 (218) | 95⅞ x 26⅞ x 33½ | 2416 x 683 x 850 |
| STAINLESS EXTERIOR | | | | | | | |
| TD-24-7-S-HC | 1 | 2 | 1/10 | 1.4 | 180 (82) | 24½ x 26⅞ x 33½ | 623 x 683 x 850 |
| TD-36-12-S-HC | 1 | 2 | 1/10 | 1.4 | 225 (103) | 36¾ x 26⅞ x 33⅜ | 934 x 677 x 848 |
| TD-50-18-S-HC | 2 | 3 | 1/5 | 1.9 | 280 (128) | 49⅞ x 26⅞ x 33⅜ | 1261 x 677 x 848 |
| TD-65-24-S-HC | 2 | 4 | 1/5 | 1.9 | 370 (168) | 64⅞ x 26⅞ x 33⅜ | 1642 x 677 x 848 |
| TD-80-30-S-HC | 3 | 6 | 1/4 | 2.8 | 415 (189) | 80⅞ x 26⅞ x 33½ | 2035 x 683 x 850 |
| TD-95-38-S-HC | 3 | 7 | 1/4 | 3.1 | 470 (214) | 95⅞ x 26⅞ x 33⅜ | 2423 x 677 x 848 |

† Depth does not include 1½" (39mm) for cap catcher or 1" (26mm) for rear bumpers.
 note: 12 oz. bottles refers to 12 oz. longneck bottles.

T-GC™ GLASS & PLATE CHILLERS/FROSTERS

| Model | # of Lids | # of Dividers | HP | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---------------------------|-----------|---------------|-----|------|-------------------------|---------------------------------|---------------------------------|
| BLACK EXTERIOR | | | | | | | |
| T-24-GC-HC | 1 | 3 | 1/5 | 2.3 | 180 (82) | 24½ x 26⅞ x 33½ | 623 x 683 x 850 |
| T-36-GC-HC | 1 | 3 | 1/4 | 2.3 | 240 (109) | 36¾ x 26⅞ x 33⅜ | 934 x 677 x 848 |
| T-50-GC-HC | 2 | 5 | 1/3 | 3.5 | 290 (132) | 49⅞ x 26⅞ x 33⅜ | 1261 x 677 x 848 |
| STAINLESS EXTERIOR | | | | | | | |
| T-24-GC-S-HC | 1 | 3 | 1/5 | 2.3 | 185 (84) | 24½ x 26⅞ x 33½ | 623 x 683 x 850 |
| T-36-GC-S-HC | 1 | 3 | 1/4 | 2.3 | 245 (112) | 36¾ x 26⅞ x 33⅜ | 934 x 677 x 848 |
| T-50-GC-S-HC | 2 | 5 | 1/3 | 3.5 | 290 (132) | 49⅞ x 26⅞ x 33⅜ | 1261 x 677 x 848 |

† Depth does not include 1" (26mm) for rear bumpers.

T-GC™ GLASS LID OPTIONS

| Model |
|-------------------|
| GLASS LIDS "GLID" |
| TD-24-7-HC |
| TD-36-12-HC |
| TD-50-18-HC |
| TD-65-24-HC |
| TD-80-30-HC |
| TD-95-38-HC |

Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.



BAR REFRIGERATION CAN/BOTTLE/BARREL CAPACITY

| Model | Capacity (12oz. Cans) | Capacity (12oz. Bottles) | Capacity (Barrels) |
|---|-----------------------|--------------------------|--------------------|
| TBR - REACH-IN, BLACK EXTERIOR | | | |
| TBR32-RISZ1-L-B-S-1 | 38 - 6pk.12oz. | 21 - 6pk.12oz. | 2 - 1/6 |
| TBR36-RISZ1-L-B-S-1 | 44 - 6pk.12oz. | 27 - 6pk.12oz. | 4 - 1/6 |
| TBR48-RISZ1-L-B-SS-1 | 76 - 6pk.12oz. | 43 - 6pk.12oz. | 6 - 1/6 |
| TBR52-RISZ1-L-B-SS-1 | 78 - 6pk.12oz. | 49 - 6pk.12oz. | 2 - 1/2 |
| TBR60-RISZ1-L-B-SS-1 | 101 - 6pk.12oz. | 63 - 6pk.12oz. | 2 - 1/2 |
| TBR72-RISZ1-L-B-SSS-1 | 125 - 6pk.12oz. | 78 - 6pk.12oz. | 3 - 1/2 |
| TBR84-RISZ1-L-B-SSS-1 | 164 - 6pk.12oz. | 96 - 6pk.12oz. | 3 - 1/2 |
| TBR92-RISZ1-L-B-SSSS-1 | 182 - 6pk.12oz. | 108 - 6pk.12oz. | 4 - 1/2 |
| TBR108-RISZ1-L-B-SSSS-1 | 220 - 6pk.12oz. | 132 - 6pk.12oz. | 4 - 1/2 |
| TBR32-RISZ1-L-B-G-1 | 38 - 6pk.12oz. | 21 - 6pk.12oz. | 2 - 1/6 |
| TBR36-RISZ1-L-B-G-1 | 44 - 6pk.12oz. | 27 - 6pk.12oz. | 4 - 1/6 |
| TBR48-RISZ1-L-B-GG-1 | 76 - 6pk.12oz. | 43 - 6pk.12oz. | 6 - 1/6 |
| TBR52-RISZ1-L-B-GG-1 | 78 - 6pk.12oz. | 49 - 6pk.12oz. | 2 - 1/2 |
| TBR60-RISZ1-L-B-GG-1 | 101 - 6pk.12oz. | 63 - 6pk.12oz. | 2 - 1/2 |
| TBR72-RISZ1-L-B-GGG-1 | 125 - 6pk.12oz. | 78 - 6pk.12oz. | 3 - 1/2 |
| TBR84-RISZ1-L-B-GGG-1 | 164 - 6pk.12oz. | 96 - 6pk.12oz. | 3 - 1/2 |
| TBR92-RISZ1-L-B-GGGG-1 | 182 - 6pk.12oz. | 108 - 6pk.12oz. | 4 - 1/2 |
| TBR108-RISZ1-L-B-GGGG-1 | 220 - 6pk.12oz. | 132 - 6pk.12oz. | 4 - 1/2 |
| TBR48-RISZ1-L-B-11-1 | 68 - 6pk.12oz. | 43 - 6pk.12oz. | 5 - 1/6 |
| TBR52-RISZ1-L-B-11-1 | 78 - 6pk.12oz. | 48 - 6pk.12oz. | 2 - 1/2 |
| TBR60-RISZ1-L-B-11-1 | 100 - 6pk.12oz. | 59 - 6pk.12oz. | 2 - 1/2 |
| TBR72-RISZ1-L-B-111-1 | 120 - 6pk.12oz. | 73 - 6pk.12oz. | 3 - 1/2 |
| TBR - PASS-THRU, BLACK EXTERIOR | | | |
| TBR36-PTSZ1-L-B-S-S-1 | 38 - 6pk.12oz. | 25 - 6pk.12oz. | 6 - 1/6 |
| TBR60-PTSZ1-L-B-SS-SS-1 | 89 - 6pk.12oz. | 57 - 6pk.12oz. | 2 - 1/2 |
| TBR84-PTSZ1-L-B-SSS-SSS-1 | 164 - 6pk.12oz. | 88 - 6pk.12oz. | 3 - 1/2 |
| TBR36-PTSZ1-L-B-G-G-1 | 38 - 6pk.12oz. | 25 - 6pk.12oz. | 6 - 1/6 |
| TBR60-PTSZ1-L-B-GG-GG-1 | 89 - 6pk.12oz. | 57 - 6pk.12oz. | 2 - 1/2 |
| TBR84-PTSZ1-L-B-GGG-GGG-1 | 164 - 6pk.12oz. | 88 - 6pk.12oz. | 3 - 1/2 |
| TBR60-PTSZ1-L-B-11-11-1 | 88 - 6pk.12oz. | 54 - 6pk.12oz. | 2 - 1/2 |
| TBR - REACH-IN, STAINLESS EXTERIOR | | | |
| TBR32-RISZ1-L-S-S-1 | 38 - 6pk.12oz. | 21 - 6pk.12oz. | 2 - 1/6 |
| TBR36-RISZ1-L-S-S-1 | 44 - 6pk.12oz. | 27 - 6pk.12oz. | 4 - 1/6 |
| TBR48-RISZ1-L-S-SS-1 | 76 - 6pk.12oz. | 43 - 6pk.12oz. | 6 - 1/6 |
| TBR52-RISZ1-L-S-SS-1 | 78 - 6pk.12oz. | 49 - 6pk.12oz. | 2 - 1/2 |
| TBR60-RISZ1-L-S-SS-1 | 101 - 6pk.12oz. | 63 - 6pk.12oz. | 2 - 1/2 |
| TBR72-RISZ1-L-S-SSS-1 | 125 - 6pk.12oz. | 78 - 6pk.12oz. | 3 - 1/2 |
| TBR84-RISZ1-L-S-SSS-1 | 164 - 6pk.12oz. | 96 - 6pk.12oz. | 3 - 1/2 |
| TBR92-RISZ1-L-S-SSSS-1 | 182 - 6pk.12oz. | 108 - 6pk.12oz. | 4 - 1/2 |
| TBR108-RISZ1-L-S-SSSS-1 | 220 - 6pk.12oz. | 132 - 6pk.12oz. | 4 - 1/2 |
| TBR32-RISZ1-L-S-G-1 | 38 - 6pk.12oz. | 21 - 6pk.12oz. | 2 - 1/6 |
| TBR36-RISZ1-L-S-G-1 | 44 - 6pk.12oz. | 27 - 6pk.12oz. | 4 - 1/6 |
| TBR48-RISZ1-L-S-GG-1 | 76 - 6pk.12oz. | 43 - 6pk.12oz. | 6 - 1/6 |
| TBR52-RISZ1-L-S-GG-1 | 78 - 6pk.12oz. | 49 - 6pk.12oz. | 2 - 1/2 |
| TBR60-RISZ1-L-S-GG-1 | 101 - 6pk.12oz. | 63 - 6pk.12oz. | 2 - 1/2 |
| TBR72-RISZ1-L-S-GGG-1 | 125 - 6pk.12oz. | 78 - 6pk.12oz. | 3 - 1/2 |
| TBR84-RISZ1-L-S-GGG-1 | 164 - 6pk.12oz. | 96 - 6pk.12oz. | 3 - 1/2 |
| TBR92-RISZ1-L-S-GGGG-1 | 182 - 6pk.12oz. | 108 - 6pk.12oz. | 4 - 1/2 |
| TBR108-RISZ1-L-S-GGGG-1 | 220 - 6pk.12oz. | 132 - 6pk.12oz. | 4 - 1/2 |

note: 12 oz. bottles refers to 12 oz. longneck bottles.

| Model | Capacity (12oz. Cans) | Capacity (12oz. Bottles) | Capacity (Barrels) |
|--|-----------------------|--------------------------|--------------------|
| TBR - REACH-IN, STAINLESS EXTERIOR (CONT.) | | | |
| TBR48-RISZ1-L-S-11-1 | 68 - 6pk.12oz. | 43 - 6pk.12oz. | 5 - 1/6 |
| TBR52-RISZ1-L-S-11-1 | 78 - 6pk.12oz. | 48 - 6pk.12oz. | 2 - 1/2 |
| TBR60-RISZ1-L-S-11-1 | 100 - 6pk.12oz. | 59 - 6pk.12oz. | 2 - 1/2 |
| TBR72-RISZ1-L-S-111-1 | 120 - 6pk.12oz. | 73 - 6pk.12oz. | 3 - 1/2 |
| TBR - PASS THRU, STAINLESS EXTERIOR | | | |
| TBR36-PTSZ1-L-S-S-S-1 | 38 - 6pk.12oz. | 25 - 6pk.12oz. | 6 - 1/6 |
| TBR60-PTSZ1-L-S-SS-SS-1 | 89 - 6pk.12oz. | 57 - 6pk.12oz. | 2 - 1/2 |
| TBR84-PTSZ1-L-S-SSS-SSS-1 | 164 - 6pk.12oz. | 88 - 6pk.12oz. | 3 - 1/2 |
| TBR36-PTSZ1-L-S-G-G-1 | 38 - 6pk.12oz. | 25 - 6pk.12oz. | 6 - 1/6 |
| TBR60-PTSZ1-L-S-GG-GG-1 | 89 - 6pk.12oz. | 57 - 6pk.12oz. | 2 - 1/2 |
| TBR84-PTSZ1-L-S-GGG-GGG-1 | 164 - 6pk.12oz. | 88 - 6pk.12oz. | 3 - 1/2 |
| TBR60-PTSZ1-L-S-11-11-1 | 88 - 6pk.12oz. | 54 - 6pk.12oz. | 2 - 1/2 |
| TDR - REACH-IN, BLACK EXTERIOR | | | |
| TDR32-RISZ1-L-B-S-1 | 38 - 6pk.12oz. | 21 - 6pk.12oz. | 2 - 1/6 |
| TDR36-RISZ1-L-B-S-1 | 44 - 6pk.12oz. | 27 - 6pk.12oz. | 4 - 1/6 |
| TDR48-RISZ1-L-B-SS-1 | 76 - 6pk.12oz. | 43 - 6pk.12oz. | 6 - 1/6 |
| TDR52-RISZ1-L-B-SS-1 | 78 - 6pk.12oz. | 49 - 6pk.12oz. | 2 - 1/2 |
| TDR60-RISZ1-L-B-SS-1 | 101 - 6pk.12oz. | 63 - 6pk.12oz. | 2 - 1/2 |
| TDR72-RISZ1-L-B-SSS-1 | 125 - 6pk.12oz. | 78 - 6pk.12oz. | 2 - 1/2 |
| TDR84-RISZ1-L-B-SSS-1 | 164 - 6pk.12oz. | 96 - 6pk.12oz. | 2 - 1/2 |
| TDR92-RISZ1-L-B-SSSS-1 | 182 - 6pk.12oz. | 108 - 6pk.12oz. | 2 - 1/2 |
| TDR108-RISZ1-L-B-SSSS-1 | 220 - 6pk.12oz. | 132 - 6pk.12oz. | 2 - 1/2 |
| TDR48-RISZ1-L-B-SG-1 | 38 - 6pk.12oz. | 21 - 6pk.12oz. | 3 - 1/6 |
| TDR52-RISZ1-L-B-SG-1 | 38 - 6pk.12oz. | 24 - 6pk.12oz. | 2 - 1/2 |
| TDR - PASS-THRU, BLACK EXTERIOR | | | |
| TDR36-PTSZ1-L-B-S-S-1 | 38 - 6pk.12oz. | 25 - 6pk.12oz. | 6 - 1/6 |
| TDR60-PTSZ1-L-B-SS-SS-1 | 89 - 6pk.12oz. | 57 - 6pk.12oz. | 2 - 1/2 |
| TDR84-PTSZ1-L-B-SSS-SSS-1 | 164 - 6pk.12oz. | 88 - 6pk.12oz. | 6 - 1/2 |
| TDR - REACH-IN, STAINLESS EXTERIOR | | | |
| TDR32-RISZ1-L-S-S-1 | 38 - 6pk.12oz. | 21 - 6pk.12oz. | 2 - 1/6 |
| TDR36-RISZ1-L-S-S-1 | 44 - 6pk.12oz. | 27 - 6pk.12oz. | 4 - 1/6 |
| TDR48-RISZ1-L-S-SS-1 | 76 - 6pk.12oz. | 43 - 6pk.12oz. | 6 - 1/6 |
| TDR52-RISZ1-L-S-SS-1 | 78 - 6pk.12oz. | 49 - 6pk.12oz. | 2 - 1/2 |
| TDR60-RISZ1-L-S-SS-1 | 101 - 6pk.12oz. | 63 - 6pk.12oz. | 2 - 1/2 |
| TDR72-RISZ1-L-S-SSS-1 | 125 - 6pk.12oz. | 78 - 6pk.12oz. | 2 - 1/2 |
| TDR84-RISZ1-L-S-SSS-1 | 164 - 6pk.12oz. | 96 - 6pk.12oz. | 2 - 1/2 |
| TDR92-RISZ1-L-S-SSSS-1 | 182 - 6pk.12oz. | 108 - 6pk.12oz. | 2 - 1/2 |
| TDR108-RISZ1-L-S-SSSS-1 | 220 - 6pk.12oz. | 132 - 6pk.12oz. | 2 - 1/2 |
| TDR48-RISZ1-L-S-SG-1 | 38 - 6pk.12oz. | 21 - 6pk.12oz. | 3 - 1/6 |
| TDR52-RISZ1-L-S-SG-1 | 38 - 6pk.12oz. | 24 - 6pk.12oz. | 2 - 1/2 |
| TDR - PASS-THRU, STAINLESS EXTERIOR | | | |
| TDR36-PTSZ1-L-S-S-S-1 | 38 - 6pk.12oz. | 25 - 6pk.12oz. | 6 - 1/6 |
| TDR60-PTSZ1-L-S-SS-SS-1 | 89 - 6pk.12oz. | 57 - 6pk.12oz. | 2 - 1/2 |
| TDR84-PTSZ1-L-S-SSS-SSS-1 | 164 - 6pk.12oz. | 88 - 6pk.12oz. | 6 - 1/2 |
| TBB - REACH-IN, STAINLESS TOP, BLACK EXTERIOR | | | |
| TBB-1-HC | 30 6-pks12oz. | - | 1 - 1/2 |
| TBB-2-HC | 88 6-pks12oz. | - | 2 - 1/2 |
| TBB-3-HC | 112 6-pks12oz. | - | 3 - 1/2 |
| TBB-4-HC | 152 6-pks12oz. | - | 4 - 1/2 |

note: 12 oz. bottles refers to 12 oz. longneck bottles.

| Model | Capacity (12oz. Cans) | Capacity (12oz. Bottles) | Capacity (Barrels) |
|--|-----------------------|--------------------------|--------------------|
| TBB - REACH-IN, STAINLESS TOP, BLACK EXTERIOR | | | |
| TBB-2G-HC-LD | 88 6-pks.12oz. | - | 2 - 1/2 |
| TBB-3G-HC-LD | 112 6-pks.12oz. | - | 3 - 1/2 |
| TBB-4G-HC-LD | 152 6-pks.12oz. | - | 4 - 1/2 |
| TBB - PASS-THRU, STAINLESS TOP, BLACK EXTERIOR | | | |
| TBB-4PT | 152 6-pks.12oz. | - | 4 - 1/2 |
| TBB - REACH-IN, STAINLESS TOP, STAINLESS EXTERIOR | | | |
| TBB-1-S-HC | 30 6-pks.12oz. | - | 1 - 1/2 |
| TBB-2-S-HC | 88 6-pks.12oz. | - | 2 - 1/2 |
| TBB-3-S-HC | 112 6-pks.12oz. | - | 3 - 1/2 |
| TBB-4-S-HC | 152 6-pks.12oz. | - | 4 - 1/2 |
| TBB-2G-S-HC-LD | 88 6-pks.12oz. | - | 2 - 1/2 |
| TBB-3G-S-HC-LD | 112 6-pks.12oz. | - | 3 - 1/2 |
| TBB-4G-S-HC-LD | 152 6-pks.12oz. | - | 4 - 1/2 |
| TBB - PASS-THRU, STAINLESS TOP, STAINLESS EXTERIOR | | | |
| TBB-4PT-S | 152 6-pks.12oz. | - | 4 - 1/2 |
| TBB24 - 24" (610MM) REACH-IN, STAINLESS TOP, STAINLESS EXTERIOR | | | |
| TBB24-48-2S-Z1-SFT-B-1 | 76 6-pks.12oz. | 43 6-pks.12oz. | 6 - 1/6 |
| TBB24-60-2S-Z1-SFT-B-1 | 89 6-pks.12oz. | 57 6-pks.12oz. | 2 - 1/2 |
| TBB24-72-3S-Z1-SFT-B-1 | 125 6-pks.12oz. | 78 6-pks.12oz. | 3 - 1/2 |
| TBB24-48-2G-Z1-SFT-B-1 | 76 6-pks.12oz. | 43 6-pks.12oz. | 6 - 1/6 |
| TBB24-60-2G-Z1-SFT-B-1 | 89 6-pks.12oz. | 57 6-pks.12oz. | 2 - 1/2 |
| TBB24-72-3G-Z1-SFT-B-1 | 125 6-pks.12oz. | 78 6-pks.12oz. | 3 - 1/2 |
| TBB24 - 24" (610MM) REACH-IN, STAINLESS TOP, STAINLESS EXTERIOR | | | |
| TBB24-48-2S-Z1-SFT-S-1 | 76 6-pks.12oz. | 43 6-pks.12oz. | 6 - 1/6 |
| TBB24-60-2S-Z1-SFT-S-1 | 89 6-pks.12oz. | 57 6-pks.12oz. | 2 - 1/2 |
| TBB24-72-3S-Z1-SFT-S-1 | 125 6-pks.12oz. | 78 6-pks.12oz. | 3 - 1/2 |
| TBB24-48-2G-Z1-SFT-S-1 | 76 6-pks.12oz. | 43 6-pks.12oz. | 6 - 1/6 |
| TBB24-60-2G-Z1-SFT-S-1 | 89 6-pks.12oz. | 57 6-pks.12oz. | 2 - 1/2 |
| TBB24-72-3G-Z1-SFT-S-1 | 125 6-pks.12oz. | 78 6-pks.12oz. | 3 - 1/2 |
| TBB24 - 24" (610MM) REACH-IN, BLACK SUB-TOP, BLACK EXTERIOR | | | |
| TBB24-48-2S-Z1-BST-B-1 | 76 6-pks.12oz. | 43 6-pks.12oz. | 6 - 1/6 |
| TBB24-60-2S-Z1-BST-B-1 | 89 6-pks.12oz. | 57 6-pks.12oz. | 2 - 1/2 |
| TBB24-72-3S-Z1-BST-B-1 | 125 6-pks.12oz. | 78 6-pks.12oz. | 3 - 1/2 |
| TBB24-48-2G-Z1-BST-B-1 | 76 6-pks.12oz. | 43 6-pks.12oz. | 6 - 1/6 |
| TBB24-60-2G-Z1-BST-B-1 | 89 6-pks.12oz. | 57 6-pks.12oz. | 2 - 1/2 |
| TBB24-72-3G-Z1-BST-B-1 | 125 6-pks.12oz. | 78 6-pks.12oz. | 3 - 1/2 |
| TBB24 - 24" (610MM) REACH-IN, BLACK SUB-TOP, STAINLESS EXTERIOR | | | |
| TBB24-48-2S-Z1-BST-S-1 | 76 6-pks.12oz. | 43 6-pks.12oz. | 6 - 1/6 |
| TBB24-60-2S-Z1-BST-S-1 | 89 6-pks.12oz. | 57 6-pks.12oz. | 2 - 1/2 |
| TBB24-72-3S-Z1-BST-S-1 | 125 6-pks.12oz. | 78 6-pks.12oz. | 3 - 1/2 |
| TBB24-48-2G-Z1-BST-S-1 | 76 6-pks.12oz. | 43 6-pks.12oz. | 6 - 1/6 |
| TBB24-60-2G-Z1-BST-S-1 | 89 6-pks.12oz. | 57 6-pks.12oz. | 2 - 1/2 |
| TBB24-72-3G-Z1-BST-S-1 | 125 6-pks.12oz. | 78 6-pks.12oz. | 3 - 1/2 |
| TDD - STAINLESS TOP, BLACK EXTERIOR | | | |
| TDD-1-HC | - | - | 1 - 1/2 |
| TDD-2-HC | - | - | 2 - 1/2 |
| TDD-3-HC | - | - | 3 - 1/2 |
| TDD-4-HC | - | - | 4 - 1/2 |

note: 12 oz. bottles refers to 12 oz. longneck bottles.

| Model | Capacity (12oz. Cans) | Capacity (12oz. Bottles) | Capacity (Barrels) |
|--|-----------------------|--------------------------|--------------------|
| TDD - STAINLESS EXTERIOR | | | |
| TDD-1-S-HC | - | - | 1 - 1/2 |
| TDD-2-S-HC | - | - | 2 - 1/2 |
| TDD-3-S-HC | - | - | 3 - 1/2 |
| TDD-4-S-HC | - | - | 4 - 1/2 |
| TDD - CLUB-TOP, STAINLESS TOP, BLACK EXTERIOR | | | |
| TDD-2CT-HC | - | - | 2 - 1/2 |
| TDD-3CT-HC | - | - | 3 - 1/2 |
| TDD-4CT-HC | - | - | 4 - 1/2 |
| TDD - CLUB-TOP, STAINLESS TOP, STAINLESS EXTERIOR | | | |
| TDD-2CT-S-HC | - | - | 2 - 1/2 |
| TDD-3CT-S-HC | - | - | 3 - 1/2 |
| TDD-4CT-S-HC | - | - | 4 - 1/2 |
| TD - HORIZONTAL BOTTLE COOLER - DEEP WELL | | | |
| TD-24-7-HC | 6 Cases | 4.5 Cases | - |
| TD-36-12-HC | 14.5 Cases | 11 Cases | - |
| TD-50-18-HC | 24 Cases | 16.5 Cases | - |
| TD-65-24-HC | 32.5 Cases | 22 Cases | - |
| TD-80-30-HC | 42 Cases | 30 Cases | - |
| TD-95-38-HC | 55 Cases | 37.5 Cases | - |
| TD-24-7-S-HC | 6 Cases | 4.5 Cases | - |
| TD-36-12-S-HC | 14.5 Cases | 11 Cases | - |
| TD-50-18-S-HC | 24 Cases | 16.5 Cases | - |
| TD-65-24-S-HC | 32.5 Cases | 22 Cases | - |
| TD-80-30-S-HC | 42 Cases | 30 Cases | - |
| TD-95-38-S-HC | 55 Cases | 37.5 Cases | - |
| T-GC - GLASS & PLATE CHILLERS/FROSTERS | | | |
| T-24-GC-HC | 85 | 90 | - |
| T-36-GC-HC | 172 | 180 | - |
| T-50-GC-HC | 240 | 250 | - |
| T-24-GC-S-HC | 85 | 90 | - |
| T-36-GC-S-HC | 172 | 180 | - |
| T-50-GC-S-HC | 240 | 250 | - |


note: 12 oz. bottles refers to 12 oz. longneck bottles.



Bar Refrigeration | Keg Configurations

TBB®/TDD™ KEG CONFIGURATIONS

Common Draft Beer Keg Footprints

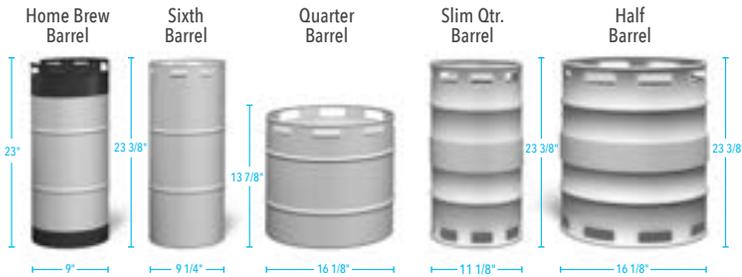


*Above dimensions may vary slightly as a result of differences between keg manufacturers.

DRAFT BEER KEG SPECIFICATIONS*

| Size | Home Brew Barrel | Sixth Barrel | Quarter Barrel | Slim Quarter Barrel | Half Barrel |
|-------------------|------------------|--------------|----------------|---------------------|-------------|
| Gallons | 5.00 | 5.16 | 7.75 | 7.75 | 15.50 |
| Ounces | 640 | 611 | 992 | 992 | 1984 |
| # of 12 oz. Beers | 53 | 55 | 82 | 82 | 165 |
| Weight (Full) | 49 lbs. | 58 lbs. | 87 lbs. | 87 lbs. | 161 lbs. |


TBB/TDD-1*

19-3/4" interior width X 24-9/32" interior depth

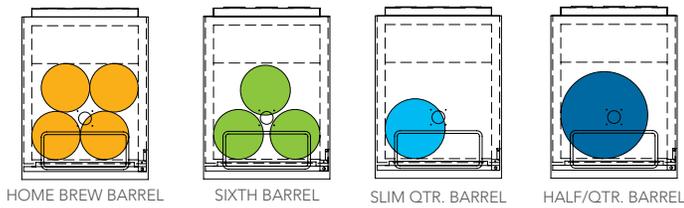


TBB/TDD-2*

43" interior width X 22" interior depth

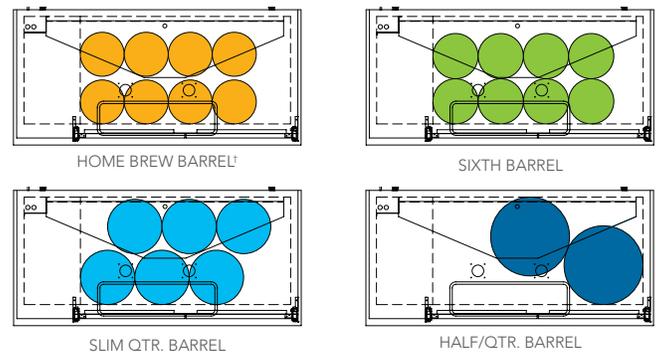


TBB/TDD-3*

53-1/4" interior width X 22" interior depth

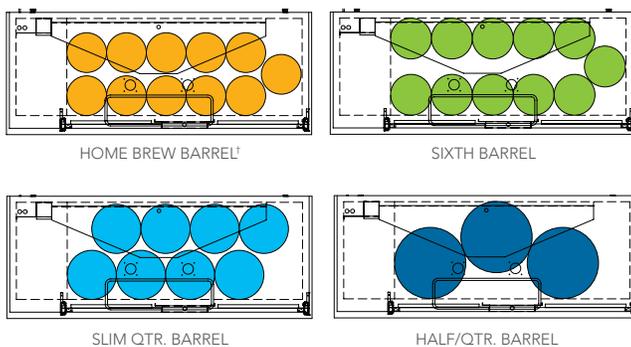

TBB/TDD-4*

72-1/4" interior width X 22" interior depth

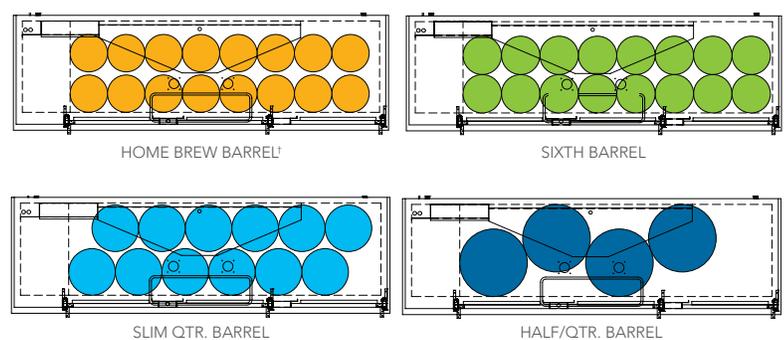

● Half/Quarter Barrel ● Slim Quarter Barrel ● Sixth Barrel ● Home Brew Barrel

* Top view shown. Please consult your beer distributor for specific sizes.
†25-25/32" usable interior height.







TBB[®]24 KEG CONFIGURATIONS

Common Draft Beer Keg Footprints





TBB24-48*

36-5/16" interior width X 18-3/4" interior depth






TBB24-60*

48-5/16" interior width X 18-3/4" interior depth



TBB24-72*

60-5/16" interior width X 18-3/4" interior depth

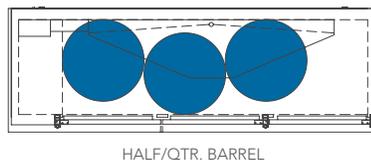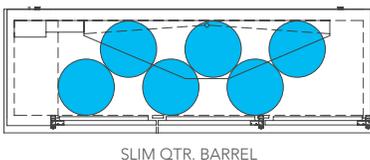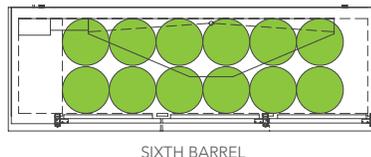

● Half/Quarter Barrel ● Slim Quarter Barrel ● Sixth Barrel ● Home Brew Barrel


* Top view shown. Please consult your beer distributor for specific sizes.
† 25-25/32" usable interior height.



Bar Refrigeration | Keg Configurations

TBR™/TDR™ KEG CONFIGURATIONS

Common Draft Beer Keg Footprints

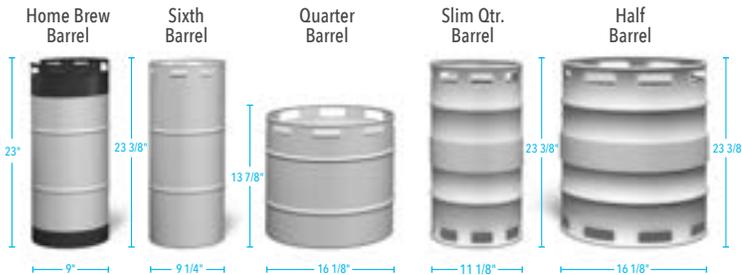



DRAFT BEER KEG SPECIFICATIONS*

| Size | Home Brew Barrel | Sixth Barrel | Quarter Barrel | Slim Quarter Barrel | Half Barrel |
|-------------------|------------------|--------------|----------------|---------------------|-------------|
| Gallons | 5.00 | 5.16 | 7.75 | 7.75 | 15.50 |
| Ounces | 640 | 611 | 992 | 992 | 1984 |
| # of 12 oz. Beers | 53 | 55 | 82 | 82 | 165 |
| Weight (Full) | 49 lbs. | 58 lbs. | 87 lbs. | 87 lbs. | 161 lbs. |

*Above dimensions may vary slightly as a result of differences between keg manufacturers.



TBR/TDR-32*

16-13/32" interior width X 18-3/4" interior depth

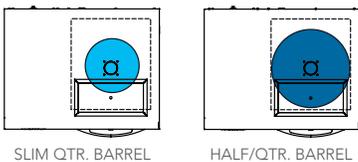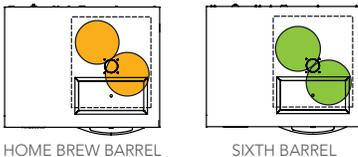



TBR/TDR-36*

20-13/32" interior width X 18-3/4" interior depth

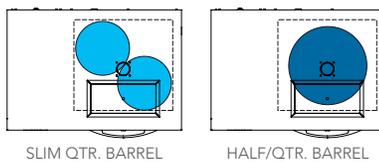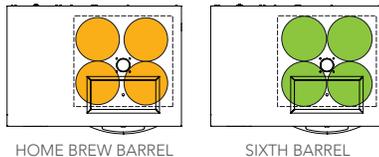



TBR/TDR-48*

32-13/32" interior width X 18-3/4" interior depth

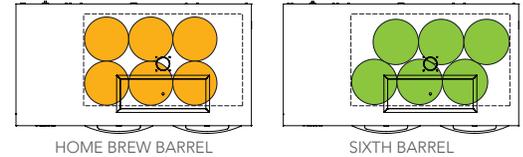



TBR/TDR-52*

36-13/32" interior width X 18-3/4" interior depth

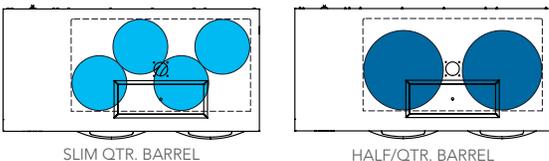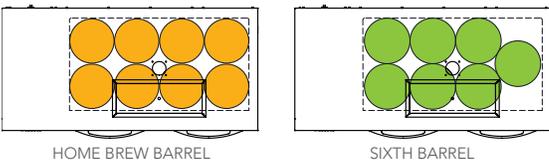

TBR/TDR-60*

44-13/32" interior width X 18-3/4" interior depth

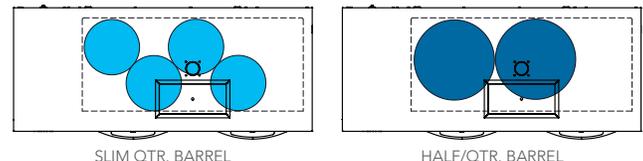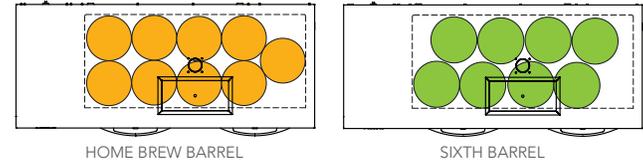

● Half/Quarter Barrel ● Slim Quarter Barrel ● Sixth Barrel ● Home Brew Barrel


* Top view shown. Please consult your beer distributor for specific sizes.

†25-25/32" usable interior height.




TBR/TDR-72*

56-13/32" interior width X 18-3/4" interior depth

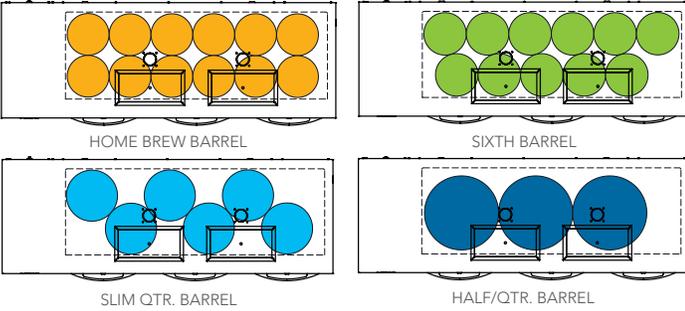


TBR/TDR-84*

68-13/32" interior width X 18-3/4" interior depth

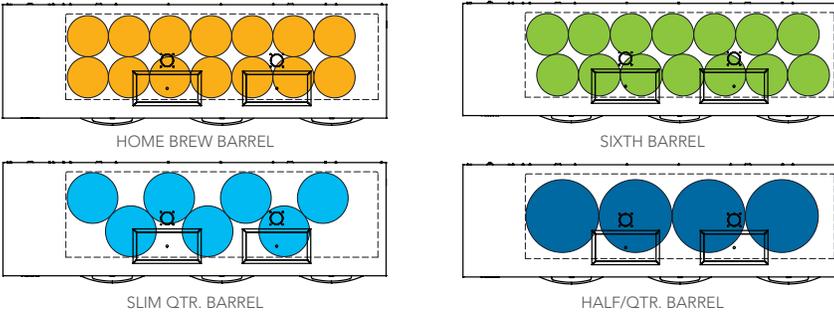


TBR/TDR-92*

76-13/32" interior width X 18-3/4" interior depth

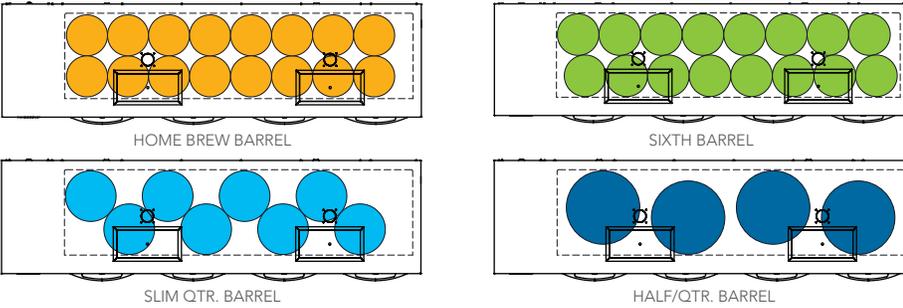

TBR/TDR-108*

92-13/32" interior width X 18-3/4" interior depth

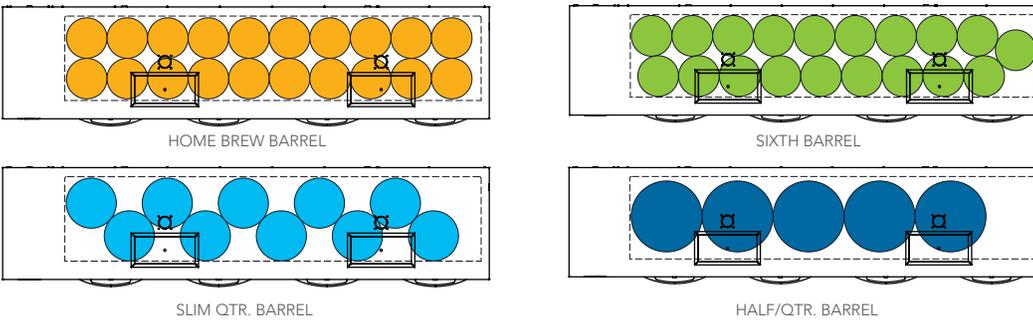

● Half/Quarter Barrel ● Slim Quarter Barrel ● Sixth Barrel ● Home Brew Barrel

* Top view shown. Please consult your beer distributor for specific sizes.
† 25-25/32" usable interior height.



Bar Refrigeration | Panel Ready Doors

TBR™/TDR™ PANEL READY DOORS

Match your style and decor!

True's line of refrigerated bar equipment now offers the option of Panel Ready Doors* which allow you to **enhance any bar with a custom look to match your cabinetry.**



TBR52-ROSZ1-R-B-SG-1

Please scan the QR code to access the TBR | TDR Bar Refrigeration Installation Manual and refer to the "Overlay Panel Specifications" (Pages 15-20).



Please Note

- True **does not** manufacture custom overlay panels.
- True cabinets with panel ready doors will ship **without** finished panels in place. (See black cabinet shown above).
- **Detailed drawings and measurements** are provided in the install manuals for aftermarket production of overlay panels.

Your cabinet will come without finished front panels but **ready for custom after-market panel installation** to further customize the look and style of your equipment.

Available on all TBR and TDR models.

*Custom overlay panels not sold by True. Cabinet ships ready for custom panel installation.





COMMERCIAL ICE MACHINES



With durable construction, True Ice® machines are built to thrive in any environment while maximizing ice production and reducing energy consumption. Additionally, True Ice® will change the game when it comes to ease of use and serviceability. Equipped with a smart board and 4.3" touch screen, True Ice® machines allow for diagnosing service issues, monitoring ice levels and simple yet effective cleaning routines.

TRUE ICE® NOMENCLATURE

Model Family

- TCI | True Cubed Ice
- TFI | True Flaked Ice
- TNI | True Nugget Ice
- TGI | True Gourmet Ice

Ice Capacity (x100 lb/day)

Electrical Configuration

- 1 | 115V/60Hz/1Ø
- 2 | 230V/60Hz/1Ø
- 3 | 230V/50Hz/1Ø
- 4 | 230V/60Hz/3Ø
- 5 | 480V/60Hz/3Ø

Cube Size

- H | Half
- F | Full
- L | Large

TCIM-422-HA1-A

Style

- M | Modular
- U | Undercounter
- D | Dispenser

Width (in.)

Condenser Type

- A | Air
- W | Water
- R | Remote





MODULAR CUBED ICE MACHINE & SLOPED FRONT STORAGE BINS

TrueTech™ Aluminum Front & Sides

Sanitizes and purifies surrounding air from bin & food zone



4-3/8" (112 mm) front display – largest in the industry



True Monitoring Solutions™

- Remote monitoring capabilities with easy back-end data access
- Location based performance enhancement plus low level ice protection
- Remote shut off

TCIM-630-HA1-A



TCIM-430-HA1-A



TCIM-522-HA1-A



TCIM-622-HA1-A



TCIM-630-HA1-A

* models shown mounted on slope front storage bins (TIB). TIB sold separately.

Features/Benefits

- Wide operating range: 35°F (1.7°C) to 110°F (43.3°C) ambient temperature. 35°F (1.7°C) to 100°F (37.7°C) water temperature.
- Construction - TrueTech™ aluminum front and sides, all plastic interior and single piece case for both 22" (559 mm) & 30" units (762 mm).
- Ultra quiet fan operation.
- Simple touch operation.
- Advanced diagnostics which allows for predictive and proactive measures.
- Built-in alarms & push notifications.
- Programmable ice production.
- Time of flight ice sensor eliminates the need for bin & dispenser thermostats.
- High & low pressure transducers for gauge-free servicing.
- Micro channel condenser for superior efficiency.
- No harvest assist necessary.
- Sanitary evaporator fully insulated & sealed for efficiency and cleanliness.
- High performance copper evaporator plate.

Sloped Front Storage bins

- Tru-tech™ aluminum exterior with heavy duty plastic lid and frame.
- All plastic interior plus 100% antimicrobial plastic liner.
- Fully insulated with environmentally friendly high-density polyurethane foam.
- Slow Close Lid/Hinge design.
- Removable Ice Baffle.
- Magnascoop® included for easy ice scoop storage.
- 3" Adjustable legs.
- Adapter top for 22" machine head on 30" bin.



TCIM MODULAR CUBED ICE MACHINE

| Model | Ice Production per 24hr - lb. (kg.)† | Ice Production per 24hr - lb. (kg.)* | Potable Water Consumption* | Electical Consumption* | Peak Heat of Rejection (BTU/hr) | Amps | Crated Weight lb. (kg.) | Cabinet Dimensions W D H* (in) | Cabinet Dimensions W D H* (mm) |
|--------------------------|--------------------------------------|--------------------------------------|----------------------------|--------------------------------|---------------------------------|------|-------------------------|--------------------------------|--------------------------------|
| ALUMINUM EXTERIOR | | | | | | | | | |
| TCIM-422 | 443 (201) | 376 (171) | 14.8 gal/100lb (56L/46 kg) | 4.05 kWh/100lb (4.05 kWh/46kg) | 5700 | 15 | 165 (75) | 22 x 24 x 22 | 559 x 610 x 559 |
| TCIM-430 | 447 (203) | 375 (170) | 14.3 gal/100lb (55L/46 kg) | 4.00 kWh/100lb (4.00 kWh/46kg) | 5800 | 15 | 180 (82) | 30 x 24 x 22 | 767 x 610 x 559 |
| TCIM-522 | 550 (249) | 500 (227) | 14.0 gal/100lb (53L/46 kg) | 3.90 kWh/100lb (3.90 kWh/46kg) | 7600 | 15 | 164 (75) | 22 x 24 x 22 | 559 x 610 x 559 |
| TCIM-530 | 560 (254) | 500 (227) | 14.2 gal/100lb (54L/46 kg) | 3.90 kWh/100lb (3.90 kWh/46kg) | 7400 | 15 | 180 (82) | 30 x 24 x 22 | 767 x 610 x 559 |
| TCIM-622 | 640 (290) | 565 (256) | 14.3 gal/100lb (55L/46 kg) | 4.02 kWh/100lb (4.02 kWh/46kg) | 8500 | 15 | 200 (91) | 22 x 24 x 27 | 559 x 610 x 686 |
| TCIM-630 | 640 (290) | 580 (263) | 14.0 gal/100lb (53L/46 kg) | 3.8 kWh/100lb (3.8 kWh/46kg) | 8200 | 15 | 194 (88) | 30 x 24 x 22 | 767 x 610 x 559 |

† at 70°F (21.1°C) air/50°F (10°C) water.

* at 90°F (33.2°C) air/70°F (21.1°C) water.


Water pressure: 20 psi (138 kPa) - 100psi (689 kPa).

TIB SLOPE FRONT STORAGE BINS

| Model | Capacity Weight lb. (kg.) | Crated Weight lb. (kg.) | Cabinet Dimensions W D† H* (in) | Cabinet Dimensions W D† H* (mm) |
|---|---------------------------|-------------------------|---------------------------------|---------------------------------|
| ALUMINUM EXTERIOR WITH PLASTIC LID & FRAME | | | | |
| TIB-422 | 365 (166) | 140 (64) | 22 x 34 x 50 | 559 x 864 x 1270 |
| TIB-530 | 450 (205) | 175 (80) | 30 x 34 x 50 | 762 x 864 x 1270 |



TIB-530

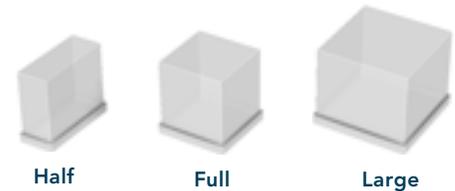

| Full Ice Cube Dimensions - inches (mm) | |
|--|---|
| Half | 7/16" x 1-1/8" x 7/8" (11.1 x 28.6 x 22.2) |
| Full | 7/8" x 7/8" x 7/8" (22.2 x 22.2 x 22.2) |
| Large | 1-1/8" x 1-1/8" x 7/8" (28.6 x 28.6 x 22.2) |




Environmentally friendly R290 hydrocarbon refrigeration system for the best in food preservation.





ACCESSORIES

True offers a large variety of accessories to compliment our cabinets, meeting the needs of our customers to customize their equipment for function and practicality in the busiest of locations.

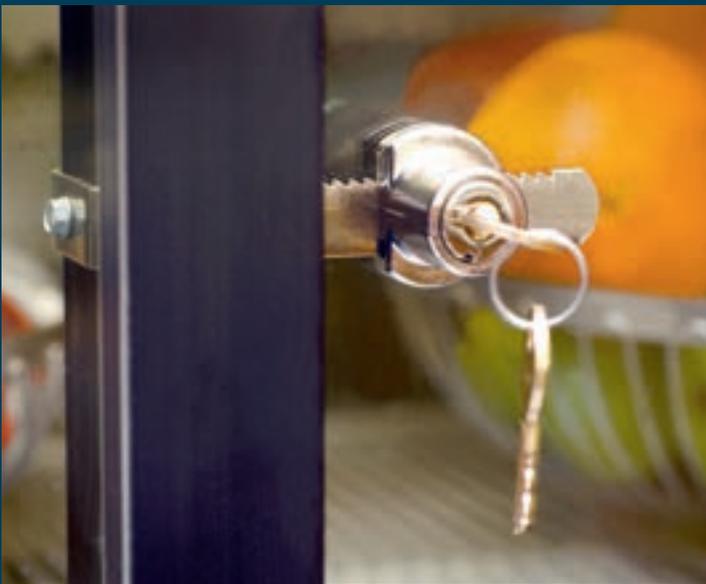


OEM Parts

Original Equipment Manufacturing Parts



Our experienced Global Customer Support Team combined with same day shipping gets you the parts you need when you need them.

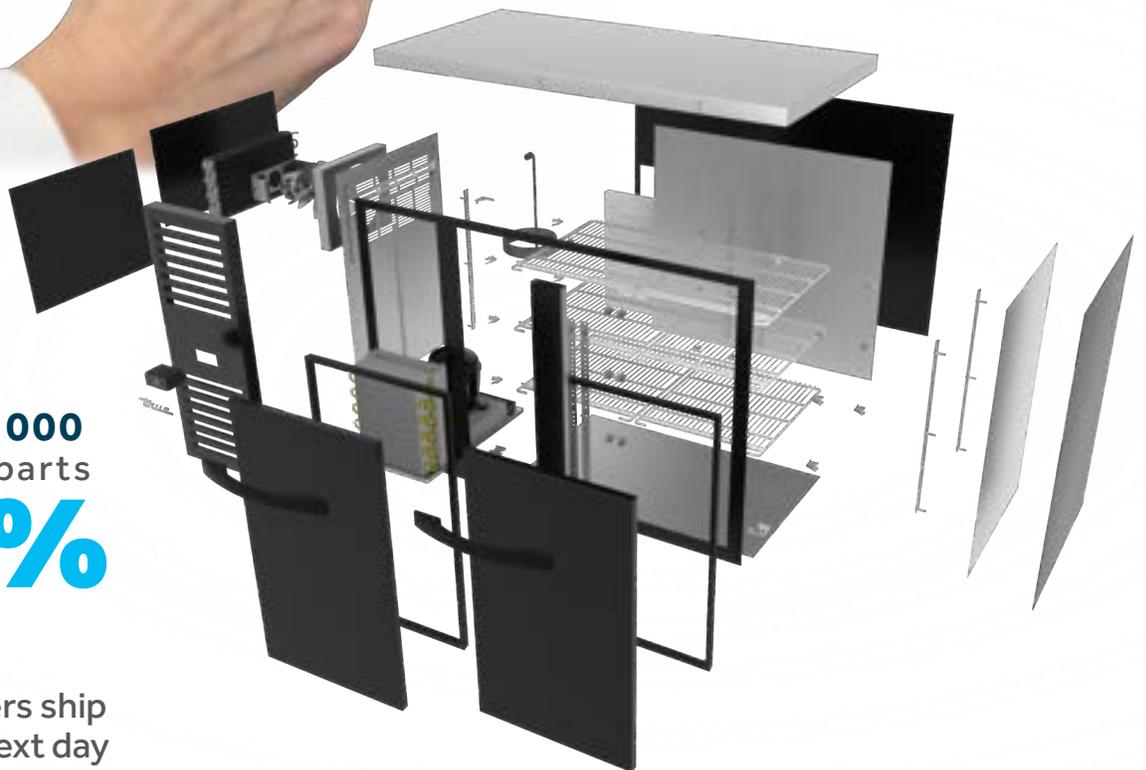

With over **100,000** ready-to-ship parts

80%

of True Parts orders ship out the same or next day

SPEC SERIES® OPTIONS

Legs & Castors

Description

- 6" (153mm) Legs (set of 4) - (stainless steel)
- 6" (153mm) Legs (set of 6) - (stainless steel)
- 6" (153mm) Legs (set of 4) - for one & two section units
- 6" (153mm) Seismic/Flanged Legs (set of 4) - for one & two section units
- 5" (127mm) Castors (set of 4) - for one & two section units w/brake
- 5" (127mm) Castors (set of 6) - 3 with brake & 3 without brake
- 3¼" (83mm) Castors (set of 4) - for one & two section units w/brake
- 3¼" (83mm) Castors (set of 6) - 3 with brake & 3 without brake



6" (153mm) Leg



6" (153mm) Seismic Leg



5" (127mm) Castor



¾" (83mm) Castor

Shelving


Description

- PVC coated shelf
- Chrome plated shelf
- Stainless steel shelf

note: When ordering STR/STA/STG Series shelves please indicate model type and section in unit that shelf will be in (left, center, or right).



PVC coated wire shelf



Chrome shelf

Hasp Lock

Description

- Single section hasp lock
- Double section hasp lock

note: Hasp locks not available on two section units with all right or all left hinges.



Single section hasp lock



Double section hasp lock

Accessories | Spec Series® Options

Interior Kit Options

Description

- Spec Kit #1 - (9) sets of #1 type tray slides and pilasters
- Spec. Kit #2 - (1) set of #2 type tray slides and pilasters (equips 1/2 section only)
- Spec. Kit #3 - (6) sets of universal type tray slides and pilasters
- Spec. Kit #4 - (3) chrome shelves and shelf supports**
(heated cabinets include wall mounted pilasters and shelf clips)
- #1 Type Tray Slide for (1) 18" x 26" (458mm x 661mm) or
(2) 14" x 18" (356mm x 458mm) pans - per set of 2 (STR/STA/STG)
- #2 Type Tray Slide for 18" x 26" (458mm x 661mm) pans per set of 2,
equips 1/2 section (STR/STA/STG)
- #3 Universal Type Tray Slide for (1) 18" x 26" (458mm x 661mm) or (2) 12" x 20" (305mm x 508mm)
or (2) 14" x 18" (356mm x 458mm) pans - per set of 2 (STR/STA/STG)
- #4 (1) Chrome shelf and shelf supports

note: when ordering interior kits for STR/STA/STG-Series units please indicate...

1. Model type
 2. Interior kit type and quantity (#1 type, #2 type, #3 type, #4 type)
 3. Section in unit that kit will be in (left, center, or right)
 4. Location in section that kit will be used in (top half, bottom half, full section)*
- * Pilasters are specific to interior kit type and are only available in half section and full section sizes.

** On refrigerators and freezers, shelves mounted with pilaster/clip assembly available in lieu of standard shelf support system if ordered with cabinet from factory.

† Pilasters and tray slides/shelving for STR series are factory installed at no charge. (please note: lead time is required depending on cabinet availability). Tray slides for STA/STG to be field installed.

| Tray Slide | Spacings | | | | |
|-------------------------------------|---------------|---------------|-------------|-------------|-------------|
| | 2" 51mm | 3" 77mm | 4" 102mm | 5" 127mm | 6" 153mm |
| #1 Tray Slides | | | | | |
| Behind full door length | 28 | 19 | 14 | 11 | 10 |
| Behind upper half door | 13 | 9 | 7 | 5 | 5 |
| Behind lower half door | 13 | 9 | 7 | 5 | 5 |
| #2 Tray Slides 39mm O.C. | 2" 51mm | 3" 77mm | 4" 102mm | 5" 127mm | 6" 153mm |
| Behind full door length | 38 | | | | |
| Behind upper half door | 18 | not available | | | |
| Behind lower half door | 18 | not available | | | |
| Universal Tray Slides | 2" 51mm | 3" 77mm | 4" 102mm | 5" 127mm | 6" 153mm |
| Behind full door length | | | 14 | 11 | 9 |
| Behind upper half door | not available | | 6 | 5 | 4 |
| Behind lower half door | not available | | 6 | 5 | 4 |



TYPE 1

16 ga. Stainless Steel
For Bottom Support of:
(1) 18" x 26" (458mm x 661mm) pan or
(2) 14" x 18" (356mm x 458mm) pan

Angle type tray slide



TYPE 2

Chrome Plated Steel Rod Type
For Rim Support of:
(1) 18" x 26" (458mm x 661mm) pan
note: One pair of #2 tray slides
accommodates one half section.
for light duty applications only.
Not available for ST()1DT-2HS-HC


Rod type tray slide



TYPE 3

16 ga. Stainless Steel
Angle Type for Bottom Support of:
(1) 18" x 26" (458mm x 661mm) pan or
(2) 14" x 18" (356mm x 458mm) pans or
(2) 12" x 20" (305mm x 508mm) pans

Universal tray slide



TYPE 4

Chrome Shelves:
Standard in STR & STA Series
refrigerators & freezers.
Stainless steel shelves also available.
PVC Coated Shelves:
Standard in STG refrigerators & freezers.

Chrome and PVC coated shelves with supports

Security Options - Reach-In & Pass Thru's

SECURITY PACKAGE 1

Reach-In/Pass-Thru Refrigerators & Freezers

Reach-In/Pass-Thru Heated Cabinets

Includes all correctional options below
 Tamper-proof Rainshield, Stainless Breaker Covers, Light Cover, Locking Hasp(s), Non-Removable Doors, Control Cover, Top Screen/Guards, Security Screws (includes/Requires Top Screen), Welded Tray Slides*, & Seismic/Flanged Legs. Remove Hinge Covers & True Logo.

SECURITY PACKAGE 2

Reach-In/Pass-Thru Refrigerators & Freezers

Reach-In/Pass-Thru Heated Cabinets

Includes the following, Tamper-proof Rainshield, Stainless Breaker Covers, Locking Hasp(s), Control Cover, & Seismic/Flanged Legs. Remove Hinge Covers & True Logo.

SECURITY PACKAGE 3

Reach-In/Pass-Thru Refrigerators & Freezers

Reach-In/Pass-Thru Heated Cabinets

Tamper-proof Rainshield, Locking Hasp(s) only (Padlock not included).

*12 sets of welded universal tray slides per door opening. Sold separately. Contact Factory for details.
 note: Individual security options or alternative combinations are available if needed. Contact Factory for details.

note: The inclusion of all options on the models listed above adheres to the Chapter XIV section 1400 American Correctional Food Service Association Standard Number 1 Equipment Specifications Correctional Package Correctional Food Service requirements.

note: Hasp locks not available on two section units with all-right or all left hinges.



Mesh screening



Hinged locking thermostat control cover



Tamper proof rain shield (standard)



Locking hasp



Seismic/flanged leg



Stainless steel thermal breaker (interior)



Heavy duty, security light cover (interior)



Tray slides & pilaster in fixed/welded rack



Hinges without covers



Security screws

Security Options - Roll-In & Roll Thru's

SECURITY PACKAGE 1

Roll-In/Roll-Thru Refrigerators & Freezers

Roll-In/Roll-Thru Heated Cabinets

Includes all correctional options below
 Tamper-proof Rainshield, Stainless Breaker Covers, Light Cover, Locking Hasp(s), Non-Removable Doors, Control Cover, Top Screen/Guards, & Security Screws (includes/Requires Top Screen). Remove Hinge Covers & True Logo.

SECURITY PACKAGE 2

Roll-In/Roll-Thru Refrigerators & Freezers

Roll-In/Roll-Thru Heated Cabinets

Includes the following, Tamper-proof Rainshield, Stainless Breaker Covers, Locking Hasp(s), & Control Cover. Remove Hinge Covers & True Logo.

SECURITY PACKAGE 3

Roll-In/Roll-Thru Refrigerators & Freezers

Roll-In/Roll-Thru Heated Cabinets

Tamper-proof Rainshield, Locking Hasp(s) only (Padlock not included).

note: Individual security options or alternative combinations are available if needed. Contact Factory for details.

note: The inclusion of all options on the models listed above adheres to the Chapter XIV section 1400 American Correctional Food Service Association Standard Number 1 Equipment Specifications Correctional Package Correctional Food Service requirements.

note: Hasp locks not available on two section units with all-right or all left hinges.



STR2R-2S Security Package

SHELVING

PVC Coated Wire Shelves

Description

Standard Shelves

Wire Cantilever Shelves

Description

FLM-27/FLM-27F White

FLM-27/FLM-27F Black

FLM-54/54F/FLM-81/81F White

FLM-54/54F/FLM-81/81F Black

TCGG-36/-S-LD (with light assembly)

TCGG-48/-S-LD (with light assembly)

TCGG-60/-S-LD (with light assembly)(left side)

TCGG-60/-S-LD (with light assembly)(right side)

TCGG-72/-S-LD (with light assembly)

Solid Cantilever Shelves

Description

FLM-27/FLM-27F White

FLM-27/FLM-27F Black

FLM-27/FLM-27F Stainless Steel

FLM-54/54F/FLM-81/81F White

FLM-54/54F/FLM-81/81F Stainless Steel

TVM Shelves

TOAM-30GS-HC-White

TOAM-30GS-HC-Black

TOAM-30GS-HC-Stainless Steel

Chrome Plated Shelves

Description

Chrome Shelves for TH-23 & TH-23G~FGD01


Price Strips

Description

Price Strips



Wire Shelf

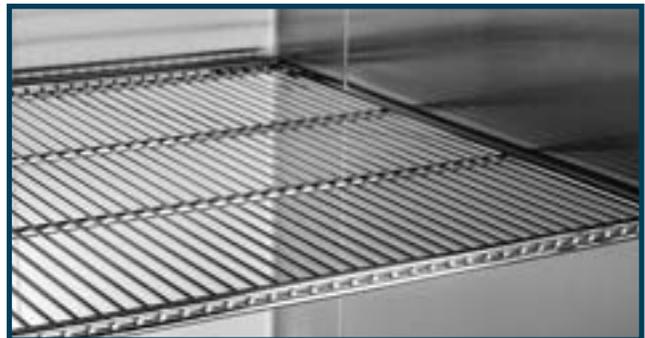

Chrome Shelf



Stainless Steel Cantilever Shelf



Price Strip mounted on wire shelf

Note: Lighted shelves for display cases are limited to the number of receptacles included with the cabinet. Order by model number.

Shelf Organizers

| Description | |
|-----------------------------|--|
| 20 oz. TrueFlex** | |
| 20 oz. TrueTrac** | |
| 1 liter TrueTrac® | |
| True Flex-Pack® (TVM-30-HC) | |
| True Flex-Pack® (TVM-36-HC) | |

* Most cooler sizes will utilize the TrueFlex® Organizers
 TrueFlex® Organizers not available for the following models (TrueTrac® required)
 GDM-10PT-HC~TSL01, GDM-33CPT-54-LD, GDM-33SSL-56-HC-LD, GDM-35SL-RF-HC-LD, GDM-41SL-54-HC-LD, GDM-41SL-60-HHC-LD, GDM-41SL-HC-LD.
 TrueFlex® & TrueTrac® organizers are not available for 10SSL-HC~TSL01.
 TrueFlex® organizers available for all back bar models.
 TrueFlex® organizers require existing or optional shelf for installation.
 **For GDM-35SLRF-HC, GDM-33CPT-LD, & GDM-33CPT-54-LD models only.

TrueFlex® Beer Organizers

| Description | Quantity |
|--------------------------------|----------|
| 27" (686MM) DEEP MODELS | |
| TBB-2-HC | 26 |
| TBB-3-HC | 34 |
| TBB-4-HC | 46 |
| 24" (610MM) DEEP MODELS | |
| TBB24-48-HC | 20 |
| TBB24-60-HC | 28 |
| TBB24-72-HC | 36 |

Wine Shelves

| Description |
|--|
| GDM-23-HC~TSL01, GDM-45-HC-LD |
| GDM-47-HC-LD, TSD-47-HD |
| GDM-69-HC-LD, GDM-72-HC~TSL01, T-72-HC, TSD-69, TBB-2-HC, TBB-3-HC, TBB-4-HC |
| FLM-27/FLM-27F White |
| FLM-27/FLM-27F Black |
| FLM-27/FLM-27F Gray |
| FLM-54/54F/FLM-81-81F White |
| FLM-54/54F/FLM-81-81F Black |
| FLM-54/54F/FLM-81-81F Gray |

Sliding Wine Racks

| Description |
|------------------|
| GDM-23-HC~TSL01 |
| GDM-23W-HC~TSL01 |



TrueTrac® (standard with 3/4" (19mm) price strip)



TrueFlex® Organizer



TrueFlex® Beer Organizer



Wine rack



Sliding wine rack

RACKS & BASKETS

Bun Tray Racks

| Description | Dimensions (W x D x H) |
|---|---|
| Full Door T, TH, TS* | 20 $\frac{7}{8}$ x 24 x 51 (531 x 610 x 1296) |
| Half Door T, TH, TS, TPP-AT-44, 60, -67, -93, -119 TUC/TWT-44-HC, 60-32-HC, -67-HC** | 20 $\frac{7}{8}$ x 24 x 22 $\frac{1}{2}$ (531 x 610 x 572) |
| T-35-HC, 35G-HC~FGD01, T-43-HC Full Door | 16 x 24 x 51 (407 x 610 x 1296) |
| T-35-HC, 35G-HC~FGD01, T-43-HC Half Door | 16 x 24 x 22 $\frac{1}{2}$ (407 x 610 x 572) |
| Bun Tray Runner, Standard | 19 $\frac{3}{4}$ x 1 $\frac{1}{2}$ x 1 $\frac{1}{16}$ (502 x 39 x 27) |
| Bun Tray Runner, Universal*** | 19 $\frac{3}{4}$ x 5 $\frac{1}{4}$ x 2 $\frac{1}{4}$ (502 x 134 x 58) |

Full door racks do not fit in half door models.

Not designed for TSD or GDM models.

* Not available for freezer models, T-12-HC/T-19-HC/-19G-HC~FGD01/T-35-HC/ T-35G-HC~FGD01, TH-23G~FGD01 or T-23DT-HC freezer section.

** Not available for freezer models, T-12-HC/T-19-HC/-19G-HC~FGD01/T-35-HC/ T-35G-HC~FGD01, TH-23G~FGD01 or T-23DT-HC freezer section. Not available for TPP/deep TUC/TWT-60-HC, 60-32-HC (left door).

***Two (2) universal runners accommodate (1) 18" x 26" (458mm x 661mm) or (1) 20" x 12" (505mm x 305mm) pan.

Full Door Bun Tray Rack can utilize 32 universal runners maximum to hold 16 pans. Half Door Bun Tray Rack can utilize 12 universal runners maximum to hold 6 pans.

note: Full door rack features 44 standard runners to hold 22 sheet pans. Maximum capacity is 32, 18" x 26" (458mm x 661mm) sheet pans. Half door bun tray rack features 22 standard runners to hold 11 sheet pans. Maximum capacity is 13, 18" x 26" (458mm x 661mm) sheet pans.

note: In T-Freezers the backguards will have to be removed prior to installing bun tray racks.

Novelty Basket

| Description | Dimensions (W x D x H) |
|---|---|
| GDM- & T- models 23-HC, 23F-HC, 43F-HC, 49-HC, 49F-HC, 72-HC, 72F-HC (3 dividers std.) | 19 $\frac{1}{4}$ x 21 $\frac{3}{4}$ x 5 (489 x 553 x 127) |
| Extra dividers (each) | |
| GDM-12-HC~TSL01, 12F-HC~TSL01 & T-models 12-HC, 12F-HC, 12FG-HC~FGD01, | 19 $\frac{1}{4}$ x 17 $\frac{1}{2}$ x 5 (489 x 435 x 127) |
| Extra dividers (each) | |

note: Basic models listed; consult factory for specific model compatibility.

Hanging Novelty Basket

| Description |
|---|
| GDM-10-HC~TSL01/10F-HC~TSL01/12-HC~TSL01/12F-HC~TSL01 (set of 3, includes dividers) |
| Extra dividers (each) |




Full Bun Tray Rack



Half Bun Tray Rack



Novelty Basket (sits on wire shelf)

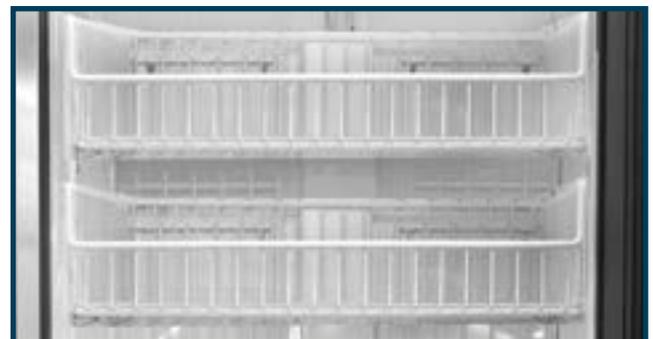


Hanging Novelty Basket

FLAT LID OPTIONS

TSSU Models

| Description | Number of Lids | Number of Pans |
|----------------|----------------|----------------|
| TSSU-27-08-HC | 1 | 8 |
| TSSU-36-08-HC | 1 | 8 |
| TSSU-48-08-HC | 1 | 8 |
| TSSU-48-10-HC | 1 | 10 |
| TSSU-48-12-HC | 1 | 12 |
| TSSU-60-08-HC | 1 | 8 |
| TSSU-60-10-HC | 1 | 10 |
| TSSU-60-12-HC | 1 | 12 |
| TSSU-60-16-HC* | 2 | 8 / 8 |
| TSSU-72-08-HC | 1 | 8 |
| TSSU-72-10-HC | 1 | 10 |
| TSSU-72-12-HC | 1 | 12 |
| TSSU-72-16-HC* | 2 | 8 / 8 |
| TSSU-72-18-HC* | 2 | 10 / 8 |

*Unit now becomes a split top with two pan openings.
 note: Flat lids are factory installed, contact customer service for lead time.

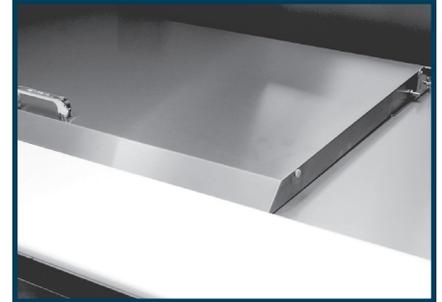

TSSU flat lid option

TSSU Mega Top Models

| Description | Number of Lids | Number of Pans |
|---------------------|----------------|----------------|
| TSSU-27-12M-B/-C-HC | 1 | 12 |
| TSSU-36-12M-B-HC | 1 | 12 |
| TSSU-48-12M-B-HC | 1 | 12 |
| TSSU-48-15M-B-HC | 1 | 15 |
| TSSU-48-18M-B-HC | 1 | 18 |
| TSSU-60-12M-B-HC | 1 | 12 |
| TSSU-60-15M-B-HC | 1 | 15 |
| TSSU-60-18M-B-HC | 1 | 18 |
| TSSU-60-24M-B-ST-HC | 2 | 12 / 12 |
| TSSU-72-12M-B-HC | 1 | 12 |
| TSSU-72-15M-B-HC | 1 | 15 |
| TSSU-72-18M-B-HC | 1 | 18 |
| TSSU-72-24M-B-ST-HC | 2 | 12 / 12 |
| TSSU-72-30M-B-ST-HC | 2 | 12 / 18 |

note: Flat lids are factory installed, contact customer service for lead time.



Bracket hardware utilizes existing screw holes.

TFP Models

| Description | Number of Lids | Number of Pans |
|----------------|----------------|----------------|
| TFP-32-12M | 1 | 12 |
| TFP-32-12M-D-2 | 1 | 12 |
| TFP-48-18M | 1 | 18 |
| TFP-48-18M-D-4 | 1 | 18 |
| TFP-64-24M | 2 | 24 |
| TFP-64-24M-D-2 | 2 | 24 |
| TFP-64-24M-D-4 | 2 | 24 |
| TFP-72-30M | 2 | 30 |
| TFP-72-30M-D-2 | 2 | 30 |
| TFP-72-30M-D-6 | 2 | 30 |

note: Flat lids are factory installed, contact customer service for lead time.

PLEXIGLASS LID OPTION

TSSU Model

| Description |
|-------------|
| TSSU-27 |



Plexiglass Lid Option (TSSU-27)

Accessories | Prep Table Options • Shelf Kits

FOOD & PIZZA PREP OPTIONS

SneezeGuard

Description

| |
|-----------------|
| TSSU-27-HC |
| TSSU-36-HC |
| TSSU-48-HC |
| TSSU-60-HC |
| TSSU-72-HC |
| TSSU-27 Mega-HC |
| TSSU-36 Mega-HC |
| TSSU-48 Mega-HC |
| TSSU-60 Mega-HC |
| TSSU-72 Mega-HC |

note: Not available for dual sided models.



SneezeGuard

Garnish Racks

Description

Number of Racks

| Description | Number of Racks |
|------------------|---|
| TPP-AT-44-HC | 1 |
| TPP-AT-60-HC | 1 |
| TPP-AT-67-HC | 1 |
| TPP-AT2-93-HC | 1 set (of 2) |
| TPP-AT-119-HC | 1 set (of 2) |
| Garnish Rack Pan | 18 $\frac{3}{4}$ " x 12 $\frac{7}{8}$ " (477mm x 327mm) |




Garnish Rack

Crumb Catcher

Description

| |
|------------|
| TSSU-27-HC |
| TSSU-36-HC |
| TSSU-48-HC |
| TSSU-60-HC |
| TSSU-72-HC |

note: All size crumb catchers require right side bracket (item number 224096) and left side bracket (item number 224097)

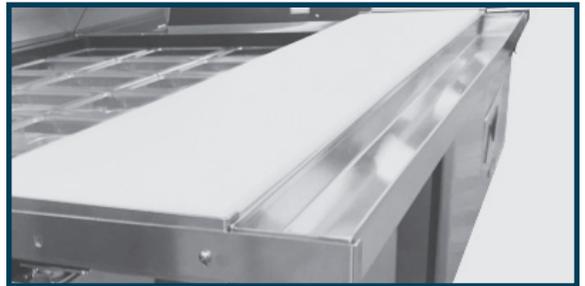

Crumb Catcher

Integrated Toppings Catcher

Description

| |
|---------------|
| TPP-AT-44-HC |
| TPP-AT-60-HC |
| TPP-AT-67-HC |
| TPP-AT2-93-HC |
| TPP-AT-119-HC |



Integrated Toppings Catcher

SHELF KITS

Basic Overshelf

Description

Dimensions (W x D x H)

| | |
|--------------------|--|
| TSSU/TUC/TWT-27-HC | 25 $\frac{1}{2}$ x 9 x 14 $\frac{3}{8}$ (639 x 229 x 366) |
| TSSU/TUC/TWT-36-HC | 34 $\frac{1}{8}$ x 9 x 14 $\frac{3}{8}$ (866 x 229 x 366) |
| TSSU/TUC/TWT-48-HC | 46 $\frac{1}{8}$ x 9 x 14 $\frac{3}{8}$ (1170 x 229 x 366) |
| TSSU/TUC/TWT-60-HC | 58 $\frac{1}{8}$ x 9 x 14 $\frac{3}{8}$ (1475 x 229 x 366) |

Made of heavy-gauge stainless steel.

note: Overshelf not available for TWT/TUC-60-32. Overshelf not available for dual sided models.
note: Height dimension from countertop to shelf top.



Basic Overshelf (TSSU/TUC/TWT)

SHELF KITS (cont.)

Sandwich/Salad Service Shelf (TSSU/TUC/TWT)

| Description | Dimensions (W x D x H) |
|-----------------------|---|
| TSSU-36/TUC/TWT-36-HC | 36 $\frac{3}{8}$ x 12 x 14 $\frac{1}{4}$ (913 x 305 x 326) |
| TSSU/TUC/TWT-48-HC | 48 $\frac{3}{8}$ x 12 x 14 $\frac{1}{4}$ (1236 x 305 x 326) |
| TSSU/TUC/TWT-60-HC | 60 $\frac{3}{8}$ x 12 x 14 $\frac{1}{4}$ (1540 x 305 x 326) |
| TSSU/TUC/TWT-72-HC | 72 $\frac{3}{8}$ x 12 x 14 $\frac{1}{4}$ (1845 x 305 x 326) |

Made of heavy-gauge stainless steel.

Sandwich/salad service shelf not available for Non Dual Sided Mega-Tops.

note: Service shelf not available for TSSU-60-16-HC, TSSU-60-16-DS-ST-HC, TUC/TWT-60-32-HC.

note: For use with dual sided, mega-top units, pan lids must be removed, lids will not hinge open.

note: Height dimension from countertop to shelf top.



Sandwich/Salad Service Shelf (TSSU/TUC/TWT)

Pizza Prep Service Shelf

| Description | Dimensions (W x D x H) |
|---------------|---|
| TPP-AT-44-HC | 44 x 17 $\frac{7}{8}$ x 18 $\frac{1}{8}$ (1118 x 455 x 461) |
| TPP-AT-60-HC | 60 $\frac{3}{8}$ x 17 $\frac{7}{8}$ x 18 $\frac{1}{8}$ (1540 x 455 x 461) |
| TPP-AT-67-HC | 67 $\frac{3}{8}$ x 17 $\frac{7}{8}$ x 18 $\frac{1}{8}$ (1718 x 455 x 461) |
| TPP-AT2-93-HC | 93 $\frac{3}{8}$ x 17 $\frac{7}{8}$ x 18 $\frac{1}{8}$ (2379 x 455 x 461) |

Made of heavy-gauge stainless steel.

note: Height dimension from countertop to shelf top.



Pizza Prep Service Shelf (TPP only)


OverShelf Kits (Single/Double)

| Description | Dimensions (W x D x H*) |
|--|--|
| SINGLE OVERSHELVES | |
| TSSU/TUC/TWT-27 & Mega-HC | 27 $\frac{3}{8}$ x 16 x 20 $\frac{1}{2}$ (702 x 407 x 509) |
| TSSU/TUC/TWT-36 & Mega-HC | 36 $\frac{3}{8}$ x 16 x 20 $\frac{1}{2}$ (624 x 407 x 509) |
| TSSU/TUC/TWT-48 & Mega-HC | 48 $\frac{3}{8}$ x 16 x 20 $\frac{1}{2}$ (1229 x 407 x 509) |
| TSSU/TUC/TWT-60 & Mega-HC | 60 $\frac{3}{8}$ x 16 x 20 $\frac{1}{2}$ (1534 x 407 x 509) |
| TSSU/TUC/TWT-72 & Mega-HC | 72 $\frac{3}{8}$ x 16 x 20 $\frac{1}{2}$ (1839 x 407 x 509) |
| TPP/TUC/TWT-44-HC | 44 $\frac{3}{8}$ x 16 x 20 $\frac{1}{2}$ (1134 x 407 x 509) |
| TPP-AT-60, TUC/TWT-60-32-HC | 60 $\frac{3}{8}$ x 16 x 20 $\frac{1}{2}$ (1534 x 407 x 509) |
| TPP-AT/TUC/TWT-67-HC | 67 $\frac{3}{8}$ x 16 x 20 $\frac{1}{2}$ (1712 x 407 x 509) |
| TFP-32 | 32 $\frac{3}{8}$ x 16 x 43 $\frac{1}{2}$ (823 x 407 x 1105) |
| TFP-48 | 48 $\frac{3}{8}$ x 16 x 43 $\frac{1}{2}$ (1229 x 407 x 1105) |
| TFP-64 | 64 $\frac{3}{8}$ x 16 x 43 $\frac{1}{2}$ (1636 x 407 x 1105) |
| TFP-72 | 72 $\frac{3}{8}$ x 16 x 43 $\frac{1}{2}$ (1839 x 407 x 1105) |
| DOUBLE OVERSHELVES | |
| TSSU/TUC/TWT-27 & Mega-HC | 27 $\frac{3}{8}$ x 16 x 33 $\frac{1}{2}$ (702 x 407 x 509) |
| TSSU/TUC/TWT-36 & Mega-HC | 36 $\frac{3}{8}$ x 16 x 33 $\frac{1}{2}$ (624 x 407 x 509) |
| TSSU/TUC/TWT-48 & Mega-HC | 48 $\frac{3}{8}$ x 16 x 33 $\frac{1}{2}$ (1229 x 407 x 509) |
| TSSU/TPP/TUC/TWT-60-HC & Mega/ TUC/TWT-60-32-HC | 60 $\frac{3}{8}$ x 16 x 33 $\frac{1}{2}$ (1534 x 407 x 509) |
| TSSU/TUC/TWT-72 & Mega-HC | 72 $\frac{3}{8}$ x 16 x 33 $\frac{1}{2}$ (1839 x 407 x 509) |
| TPP-AT-44 & TUC/TWT-44-HC | 44 $\frac{3}{8}$ x 16 x 33 $\frac{1}{2}$ (1134 x 407 x 509) |
| TPP-AT-67 & TUC/TWT-67-HC | 67 $\frac{3}{8}$ x 16 x 33 $\frac{1}{2}$ (1712 x 407 x 509) |
| TFP-32 | 32 $\frac{3}{8}$ x 16 x 56 $\frac{1}{2}$ (823 x 407 x 1436) |
| TFP-48 | 48 $\frac{3}{8}$ x 16 x 56 $\frac{1}{2}$ (1229 x 407 x 1436) |
| TFP-64 | 64 $\frac{3}{8}$ x 16 x 56 $\frac{1}{2}$ (1636 x 407 x 1436) |
| TFP-72 | 72 $\frac{3}{8}$ x 16 x 56 $\frac{1}{2}$ (1839 x 407 x 1436) |

Made of heavy-gauge stainless steel.

* maximum height, single overshelves and lower shelf on double overshelves are adjustable.

note: Overshelves not available for dual sided models. Overshelves not available for TPP-AT-93 or -119 models.

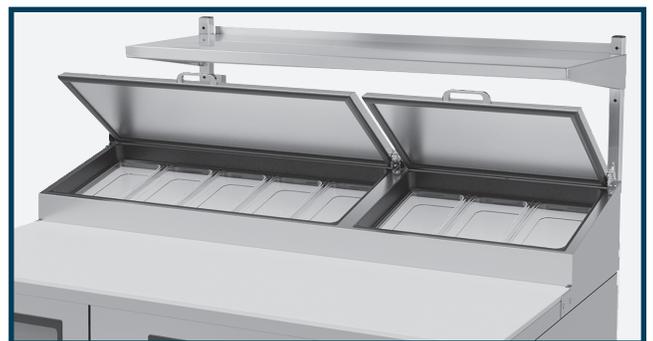

TPP-AT-60-HC (single overshelf)



TSSU-48-12-HC (double overshelf)

CASTORS & LEGS

Stem Castors & Legs

| Description |
|--|
| GDM, TOAM, TVM, T-Series, Spec Series, Food Prep, TUC/TWT (set of 4) |
| GDM, TOAM, TVM, T-Series, Spec Series, Food Prep, TUC/TWT (set of 6) |
| TRCB (set of 4 - Legs only) |
| TRCB (set of 6 - Legs only) |
| TPP-AT-119-HC & TRCB-110 require 2 sets of 4 |
| Castors are not available on GDM-05-HC-LD, GDM-05PT-HC-LD, GDM-07-HC~TSL01, GDM-09-SQ-HC-LD, hard wired models, & two section heated cabinets. Legs are not available on T-12-HC, T-12F-HC, T-12G-HC~FGD01/-12FG-HC~FGD01, GDM-10-HC~TSL01/-10F-HC~TSL01, GDM-12-HC~TSL01/GDM-12F-HC~TSL01/-12FC-HC~TSL01, GDM-33SSL-54-LD, TAC's, TDD-1/-S. |



1 1/2" (39mm) Castor



2 1/2" (64mm) Castor




3" (77mm) Castor



4" (102mm) Castor



5" (127mm) Castor

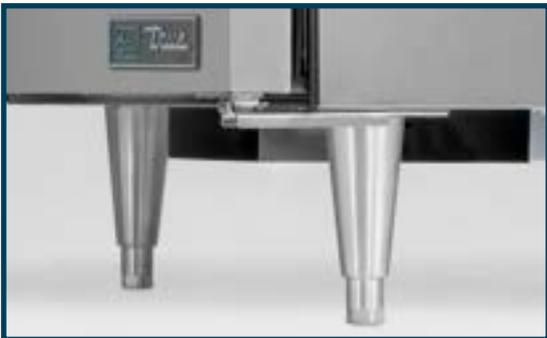

6" (153mm) Leg



6" (153mm) Seismic/Flanged Leg

CASTORS & LEGS (cont.)

Plate Castors

Description

T-50-GC-HC, TD-50-18-HC, TD-65-24-HC, TD-80-30-HC, TBB/TDD-2-HC, TBB/TDD-3-HC, TBB24-48/60/72-HC - 2½" (64mm) (set of 4)

TD-95-38-HC, TBB/TDD-4-HC - 2½" (64mm) (set of 4)

T-50-GC-HC, TD-50-18-HC, TD-65-24-HC, TD-80-30-HC, TBB/TDD-2-HC, TBB/TDD-3-HC, TBB24-48/60/72-HC - 3" (77mm) (set of 4)

TD-95-38-HC, TBB/TDD-4-HC - 3" (77mm) (set of 6)

TRCB (set of 4)

TRCB (set of 6)



Plate Castor

Stacking Collar

Description

TUC-27-HC, 27F-HC

True's stacking collar provides a space-efficient freezer and refrigerator combination in a 27½" x 30" (699mm x 726mm) footprint. Includes anti-tip bracket and 6" (153mm) seismic legs.



Stacking Collar

CUTTING BOARDS

TSSU - White Polyethylene

| Description | Dimensions (W x D) |
|---|----------------------|
| 19" (438mm) CUTTING BOARDS* - 1/2" (13mm) THICK (requires "L" brackets) | |
| TSSU-27-HC | 27½ x 19 (699 x 483) |
| TSSU-36-HC | 36 x 19 (915 x 483) |
| TSSU-48-HC | 48 x 19 (1220 x 483) |
| TSSU-60-HC | 60 x 19 (1524 x 483) |
| TSSU-72-HC | 72 x 19 (1956 x 483) |
| 19" (438mm) CUTTING BOARDS* - 3/4" (19mm) THICK (requires "L" brackets) | |
| TSSU-27-HC | 27½ x 19 (699 x 483) |
| TSSU-48-HC | 48 x 19 (1220 x 483) |
| TSSU-60-HC | 60 x 19 (1524 x 483) |
| TSSU-72-HC | 72 x 19 (1956 x 483) |

"L" Brackets for 19" (438mm) Cutting Board (set) w/out rivnut tool

"L" Brackets for 19" (438mm) Cutting Board (set) w/rivnut tool

* 19" (483mm) cutting boards not available for TSSU with drawers, dual sided or mega top models.

TPP - White Polyethylene


| Description | Dimensions (W x D) |
|---|------------------------|
| 19½" (496mm) CUTTING BOARDS - 1/2" (13mm) THICK (use existing brackets) | |
| TPP-AT-44-HC | 44¼ x 19½ (1124 x 496) |
| TPP-AT-60-HC | 60 x 19½ (1524 x 496) |
| TPP-AT-67-HC | 67 x 19½ (1702 x 496) |
| TPP-AT2-93-HC | 93 x 19½ (2363 x 496) |
| TPP-AT-119-HC | 119 x 19½ (3023 x 496) |

TUC & TWT - White Polyethylene

| Description | Dimensions (W x D) |
|---|------------------------|
| FULL TOP CUTTING BOARDS 1/2" (13mm) THICK (requires brackets) | |
| TUC-27-HC | 27½ x 30 (699 x 762) |
| TUC-36-HC | 36½ x 30 (915 x 762) |
| TUC-44-HC | 44¼ x 32½ (1124 x 816) |
| TUC-48-HC | 48 x 30 (1220 x 762) |
| TUC-60-HC | 60 x 30 (1524 x 762) |
| TUC-60-32-HC | 60 x 32½ (1524 x 816) |
| TUC-67-HC | 67 x 32½ (1702 x 816) |
| TUC-72-HC | 72 x 30 (1829 x 762) |
| TUC-93-HC | 93¼ x 32½ (2369 x 816) |
| TWT-27-HC | 27½ x 28¼ (699 x 718) |
| TWT-36-HC | 36 x 28¼ (915 x 718) |
| TWT-44-HC | 44¼ x 30 (1124 x 762) |
| TWT-48-HC | 48 x 28¼ (1220 x 718) |
| TWT-60-HC | 60 x 28¼ (1524 x 718) |
| TWT-60-32-HC | 60 x 30 (1524 x 762) |
| TWT-67-HC | 67 x 30w (1702 x 762) |
| TWT-72-HC | 72 x 28¼ (1829 x 718) |
| TWT-93-HC | 93¼ x 30 (2369 x 762) |

"L" Brackets for TUC & TWT Cutting Board (set) w/out rivnut tool

"L" Brackets for TUC & TWT Cutting Board (set) w/rivnut tool

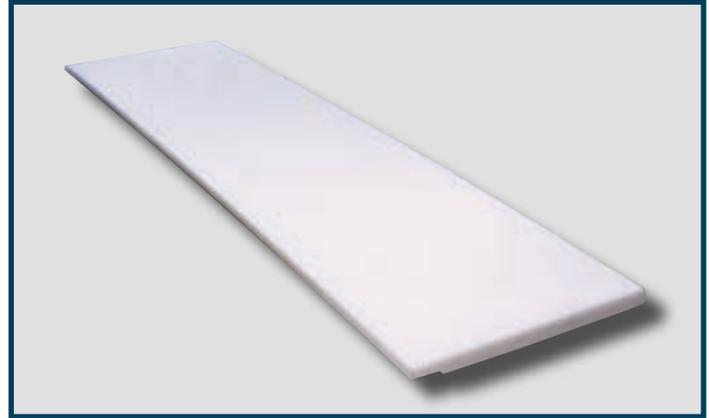

White, polyethylene cutting board.



White, polyethylene cutting board on cooler.

CUTTING BOARDS

TSSU - Composite

| Description | Dimensions (W x D) |
|---|----------------------|
| 8 ⁷ / ₈ " (226mm) CUTTING BOARDS - 1/2" (13mm) THICK (no special brackets required) | |
| TSSU-27-HC | 27½ x 19 (699 x 483) |
| TSSU-36-HC | 36 x 19 (915 x 483) |
| TSSU-48-HC | 48 x 19 (1220 x 483) |
| TSSU-60-HC | 60 x 19 (1524 x 483) |
| TSSU-72-HC | 72 x 19 (1956 x 483) |
| 11¼" (299mm) CUTTING BOARDS - 1/2" (13mm) THICK (requires "L" brackets - Mega) | |
| TSSU-27-HC | 27½ x 19 (699 x 483) |
| TSSU-36-HC | 36 x 19 (915 x 483) |
| TSSU-48-HC | 48 x 19 (1220 x 483) |
| TSSU-60-HC | 60 x 19 (1524 x 483) |
| TSSU-72-HC | 72 x 19 (1956 x 483) |
| "L" Brackets for TSSU Mega Cutting Board (set) w/out rivnut tool | |
| "L" Brackets for TSSU Mega Cutting Board (set) w/rivnut tool | |
| 19" (483mm) CUTTING BOARDS* - 1/2" (13mm) THICK (requires "L" brackets) | |
| TSSU-27-HC | 27½ x 19 (699 x 483) |
| TSSU-36-HC | 36 x 19 (915 x 483) |
| TSSU-48-HC | 48 x 19 (1220 x 483) |
| TSSU-60-HC | 60 x 19 (1524 x 483) |
| TSSU-72-HC | 72 x 19 (1956 x 483) |
| "L" Brackets for 19"(483mm) Cutting Board (set) w/out rivnut tool | |
| "L" Brackets for 19"(483mm) Cutting Board (set) w/rivnut tool | |

* 19" (483mm) cutting boards not available for TSSU with drawers, dual sided or mega top models.

TFP - Composite

| Description | Dimensions (W x D) |
|---|---------------------|
| 8" (204mm) CUTTING BOARDS - 1/2" (13mm) THICK (use existing brackets) | |
| TFP-32M | 32 x 8 (813 x 204) |
| TFP-48M | 48 x 8 (1220 x 204) |
| TFP-64M | 64 x 8 (1626 x 204) |
| TFP-72M | 72 x 8 (1829 x 204) |

TPP - Composite

| Description | Dimensions (W x D) |
|---|------------------------|
| 19½" (496mm) CUTTING BOARDS - 1/2" (13mm) THICK (use existing brackets) | |
| TPP-AT-44-HC | 44¼ x 19½ (1124 x 496) |
| TPP-AT-60-HC | 60 x 19½ (1524 x 496) |
| TPP-AT-67-HC | 67 x 19½ (1702 x 496) |
| TPP-AT-93-HC | 93 x 19½ (2363 x 496) |
| TPP-AT-119-HC | 119 x 19½ (3023 x 496) |

TUC & TWT - Composite

| Description | Dimensions (W x D) |
|--|------------------------|
| FULL TOP CUTTING BOARDS 1/2" (13mm) THICK (requires brackets) | |
| TUC-27-HC | 27½ x 30 (699 x 762) |
| TUC-36-HC | 36½ x 30 (915 x 762) |
| TUC-44-HC | 44¼ x 32½ (1124 x 816) |
| TUC-48-HC | 48 x 30 (1524 x 762) |
| TUC-60-HC | 60 x 30 (1524 x 762) |
| TUC-60-32-HC | 60 x 32½ (1524 x 816) |
| TUC-67-HC | 67 x 32½ (1702 x 816) |
| TUC-72-HC | 72 x 30 (1829 x 762) |
| TUC-93-HC | 93¼ x 32½ (2369 x 816) |
| TWT-27-HC | 27½ x 28¼ (699 x 718) |
| TWT-36-HC | 36 x 28¼ (915 x 718) |
| TWT-44-HC | 44¼ x 30 (1124 x 762) |
| TWT-48-HC | 48 x 28¼ (1220 x 718) |
| TWT-60-HC | 60 x 28¼ (1524 x 718) |
| TWT-60-32-HC | 60 x 30 (1524 x 762) |
| TWT-67-HC | 67 x 30w (1702 x 762) |
| TWT-72-HC | 72 x 28¼ (1829 x 718) |
| TWT-93-HC | 93¼ x 30 (2369 x 762) |
| "L" Brackets for TUC & TWT Cutting Board (set) w/out rivnut tool | |
| "L" Brackets for TUC & TWT Cutting Board (set) w/rivnut tool | |



Composite cutting board.



Composite cutting board on cooler.

CONTROLS & DISPLAYS

Digital Display

| Description |
|--|
| TSSU/TUC/TWT (-27-HC, -36-HC, -48-HC, -60-HC, -72-HC) - RECTANGULAR |
| Fahrenheit/Celsius |
| TPP/DEEP TUC/DEEP TWT (-44-HC, -60-32-HC, -67-HC, -93-HC, -119-HC) - ROUND |
| Fahrenheit |
| Celsius |



Digital display (TSSU, TFP, TPP, TUC & TWT).
note: TSSU's equipped with crumb catcher option, Digital Display will not be visible.

Thermostat

| Description |
|--|
| Chocolate Thermostat 50°F to 55°F (10°C to 13°C) |
| Red Wine Thermostat 50°F to 55°F (10°C to 13°C) |
| White Wine Thermostat 45°F to 50°F (7°C to 10°C) |



Wine or Chocolate Thermostat


Chocolate/Wine Controls

| Description |
|--|
| CW - Must specify Chocolate, Red or White Wine temperature setting |

TRM® ACCESSORIES

Peg Hooks

| Description | Spacing between pegs |
|-------------|----------------------|
| 5 pegs | 5" (127mm) |
| 6 pegs | 4.5" (115mm) |
| 10 pegs | 2" (51mm) |

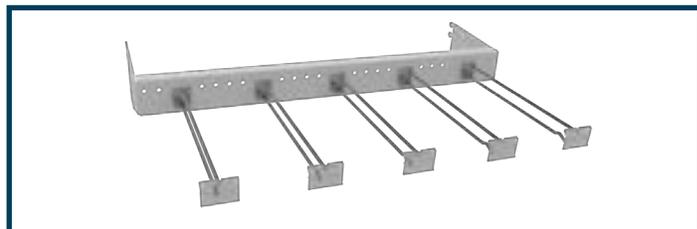

Peg Hooks

Shelves

| Description | Dimensions (W x D x H) |
|------------------------|----------------------------------|
| Solid Cantilever Shelf | 30¼ x 25½ x 7⁄8 (769 x 648 x 23) |



Solid Cantilever Shelf

Corner Kits

| Description |
|--------------------|
| Corner Kit (black) |



Corner Kit (top)



Corner Kit (Bottom)

OPEN AIR & AIR CURTAIN ACCESSORIES

Night Cover*

| Description |
|--------------------------|
| TAC NIGHT COVERS |
| TAC-14GS-HC-LD |
| THAC NIGHT COVERS |
| THAC-36-LD (White) |
| THAC-36-LD (Black) |
| THAC-36-S-LD (Stainless) |
| THAC-48-LD (White) |
| THAC-48-LD (Black) |
| THAC-48-S-LD (Stainless) |
| THAC-60-LD (White) |
| THAC-60-LD (Black) |
| THAC-60-S-LD (Stainless) |

* Night Cover is UL approved with heavy duty return mechanism.
note: Night Cover is standard on TOAM models.

Locking Security Cover*

| Description |
|-------------|
| TOAM-30-HC |
| TOAM-36-HC |
| TOAM-48-HC |
| TOAM-72-HC |

* Security cover is not UL approved.
note: Locking security cover adds 6¾" (171mm) to cabinet height. Not available for glass sided models. Factory installed only with some field assembly required.

Vandal Cover Panel*

| Description |
|-------------|
| TOAM-30-HC |
| TOAM-36-HC |
| TOAM-48-HC |
| TOAM-72-HC |

* Locking removable panel.
note: Not available for glass sided models. Factory installed only with upcharge.

Condensate Heater Pan/Bracket Kits

| Description |
|-------------|
| TOAM-30-HC |
| TOAM-36-HC |
| TOAM-48-HC |
| TOAM-72-HC |

note: Black back screen also available, contact factory.

THAC Bumper Guard Kit

| Description |
|---------------|
| THAC-36-HC-LD |
| THAC-48-HC-LD |
| THAC-60-HC-LD |



Night cover. Standard on TOAM models.



Locking security cover (black).



Vandal Cover Panel.



Cover Open.



Silver.



White.



Condensate Heater Pan/Bracket Kit (pictured without back screen).

DRAFT OPTIONS

Faucet Draft Columns

| Description |
|--|
| Single round faucet draft column |
| Double round faucet round draft column |
| Triple round faucet round draft column |
| Single round nitro draft column |
| Double round nitro draft column |
| Nitro/Cold brew combo round nitro draft column |
| Triple faucet T-style draft column |
| Quad faucet T-style draft column |
| Draft column hole cover cap* |

* Used when draft standard not required (covers hole on countertop).




Single Round




Double Round



Triple Round

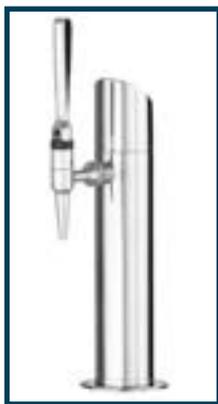

Single Nitro

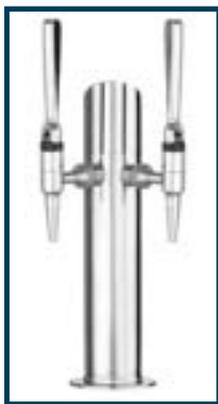

Double Nitro



Nitro/Cold Brew



T-Style Triple



T-Style Quad



Draft Column Hole Cover Cap

Nitro Kits

| Description |
|---|
| INDIVIDUALIZED NOMENCLATURE FOR TDD-1-HC VERSIONS |
| Nitro Coffee Single-Tap Kit (1 keg / 1 pressure) |
| Cold Brew Coffee Single-Tap Kit (1 keg / 1 pressure) |
| Nitro Coffee Double-Tap Kit (2 keg / 1 pressure) |
| Cold Brew Coffee Double-Tap Kit (2 keg / 1 pressure) |
| Nitro & Cold Brew Combination Double-Tap Kit (2 keg / 2 pressure) |



Single Cold Brew Kit



Double Cold Brew Kit



Single Nitro Kit



Nitro/Cold Brew
Combo Kit



Double Nitro Kit

PREMIER BAR

Manifolds

Description


- Two-way manifold
- Three-way manifold
- Four-way manifold



Two-way Manifold



Three-way Manifold



Four-way Manifold

Spill Pans & Grates

Description

- 7" (178mm) Spill pan/grate
- 11" (280mm) Spill pan/grate
- 15" (381mm) Spill pan/grate (standard)
- 19" (483mm) Spill pan/grate
- 23" (585mm) Spill pan/grate
- 27" (686mm) Spill pan/grate
- 31" (788mm) Spill pan/grate
- 35" (889mm) Spill pan/grate



Spill Pan/Grate

Access Port Plugs

Description

- Access Port Plugs



Access Port Plugs

Locks

Description

- Barrel Lock
- Ratchet Lock



Ratchet & Barrel Locks




Drain Bottle & Hanging Bracket

Draft Drain Bottle

Description

- Draft Drain Bottle & Hanger/Bracket



CO₂ Pressure Regulator

CO₂ Pressure Regulator

Description

- CO₂ Pressure Regulator

PREMIER BAR (cont.)

Shelving Options

| Description |
|---------------------------|
| Gray Wire Shelves |
| Black Wire Shelves |
| Gray Cutout Wire Shelves |
| Black Cutout Wire Shelves |
| Wine Shelves |
| Premier Bar Organizers |



Gray Wire Shelf



Gray Cutout Wire Shelf



Wine Shelf



Premier Bar Organizers

COMMERCIAL ICE ACCESSORIES

Water Filters

Description

| | |
|--------------------------------|-----------------------|
| Standard Water Filter Assembly | 14,000 gal (52996 L) |
| Platinum Water Filter Assembly | 35,000 gal (132490 L) |



Standard Water Filter



Platinum Water Filter

TrueZone™ Growth Inhibitor

Description

TrueZone™ Growth Inhibitor



TrueZone™ Growth Inhibitor Unit and Bulb.

Adaptor Top

Description

8" (204mm) Adaptor Top - 22" (559mm) Head on 30" (762mm) Bin



8" Adaptor Top

Accessories | TDM™/TGM™ Options

TDM™/TGM™ OPTIONS

TDM™ Rear Ratchet Locks (kit) & Front Glass Barrel Lock (frontal glass)

Description

All TDM models

note: Factory installed only.

Top Service Shelves

Description

TDM/TGM-36/48/59/77 Scale Shelf

TDM/TGM-36/48/59 Small Top Service Shelf

TDM/TGM-77 Small Top Service Shelf

TDM/TGM-36/48/59/77 Medium Top Service Shelf

TDM/TGM-48/59/77 Large Top Service Shelf (Not Available on TDM/TGM-36)

note: Factory installed only.

Banking Kit

Description

All TDM/TGM models

Electrical Receptacle

Description

TDM-36/TGM-36

TDM-48/TGM-48

TDM-59/TGM-59

TDM-77/TGM-77

note: Factory installed only.

External Front Shelf Kit (black only)

Description

TDM-36/TGM-36

TDM-48/TGM-48

TDM-59/TGM-59

TDM-77/TGM-77

note: Factory installed only.

External Rear Shelf Kit (black only)

Description

TDM-36/TGM-36

TDM-48/TGM-48

TDM-59/TGM-59

TDM-77/TGM-77

note: Factory installed only.




Ratchet lock.



Front glass lock.



Scale shelf

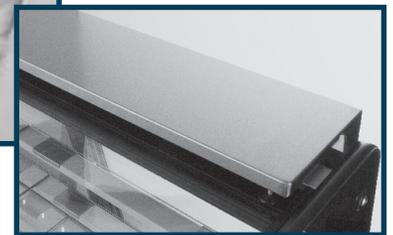


Top service shelf




TDM banking kit.



Electrical Receptacle

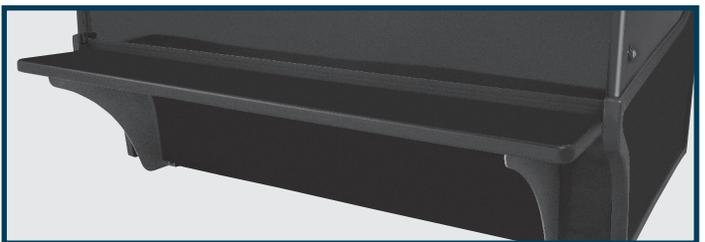

External front shelf

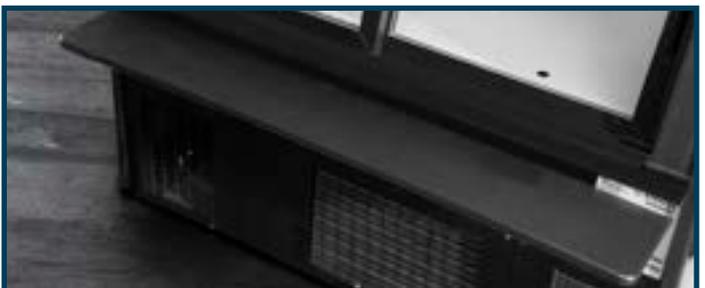

External rear shelf

Clear Glass Shelves Assembly

Description

TDM & TGM-R-36 / TDM & TGM-DC-36
 TDM & TGM-R-48 / TDM & TGM-DC-48
 TDM & TGM-DZ-48
 TDM & TGM-R-59 / TDM & TGM-DC-59
 TDM & TGM-DZ-59
 TDM & TGM-R-77 / TDM & TGM-DC-77
 TDM & TGM-DZ-77

note: Kit includes three (3) levels of shelving.

Frosted Glass Shelves Assembly

Description

TDM & TGM-R-36 / TDM & TGM-DC-36
 TDM & TGM-R-48 / TDM & TGM-DC-48
 TDM & TGM-DZ-48
 TDM & TGM-R-59 / TDM & TGM-DC-59
 TDM & TGM-DZ-59
 TDM & TGM-R-77 / TDM & TGM-DC-77
 TDM & TGM-DZ-77

note: Kit includes three (3) levels of shelving.

Stainless Steel Shelves Assembly (mezzanine)

Description

TDM & TGM-R-36 / TDM & TGM-DC-36
 TDM & TGM-R-48 / TDM & TGM-DC-48
 TDM & TGM-DZ-48
 TDM & TGM-R-59 / TDM & TGM-DC-59
 TDM & TGM-DZ-59
 TDM & TGM-R-77 / TDM & TGM-DC-77 (top/middle/bottom)
 TDM & TGM-DZ-77

note: Kit includes three (3) levels of shelving.

Chrome Shelves Assembly

Description

TDM & TGM-R-36 / TDM & TGM-DC-36
 TDM & TGM-R-48 / TDM & TGM-DC-48
 TDM & TGM-DZ-48
 TDM & TGM-R-59 / TDM & TGM-DC-59
 TDM & TGM-DZ-59
 TDM & TGM-R-77 / TDM & TGM-DC-77 (top/middle/bottom)
 TDM & TGM-DZ-77

note: Kit includes three (3) levels of shelving.

Castors

Description

ALL TDM & TGM-36/48/59 MODELS (not available for 77 models)
 4" (102mm) castor kit
 2½" (64mm) castor kit

Legs

Description

ALL TDM & TGM-36/48/59 MODELS (not available for 77 models)
 6" (153mm) castor kit



Glass Shelves



Frosted Glass Shelves




Stainless Steel Shelves (mezzanine)



Chrome Shelves



4" (102 mm) castors



6" (153 mm) legs

LOCKS

Ratchet Locks (factory installed)

| Description | Number of Locks |
|-------------------------------------|-----------------|
| Each GDM, TSD (2 door slide models) | 1 |
| Each GDM-69-HC-LD, TSD-69 | 2 |
| Each TDM (rear doors) | 1 |
| Each TGM | 1 |
| Each TCGG | 1 |
| Each TBB (2 door slide models) | 1 |
| Each TBB (3 door slide models) | 2 |

Barrel Locks (factory installed)

| Description |
|----------------------------------|
| GDM / FLM (one door)* |
| GDM / FLM (two door) |
| GDM / FLM (three door) |
| GDM, TSD (slide two door models) |

*Available only for one-door swing and slide two door refrigerators (not available for GDM-09-SQ-HC-LD).
Not available for ice merchandisers.

Bolt Locks (factory installed)

| Description |
|---|
| TSSU/TUC/TWT/TPP/TFP (per door section - one lock) |
| TSSU/TUC/TWT/TPP/TFP/TRCB (per drawers section - two locks) |

Padlocks

| Description |
|-----------------------------|
| GDM (two swing door models) |



Padlock



Ratchet Lock

Ratchet Lock Kit



Barrel Lock



Barrel Lock Kit

ADDITIONAL ACCESSORIES


Tray Slides

Description

Deep TUC

Deep TWT

Deep TPP

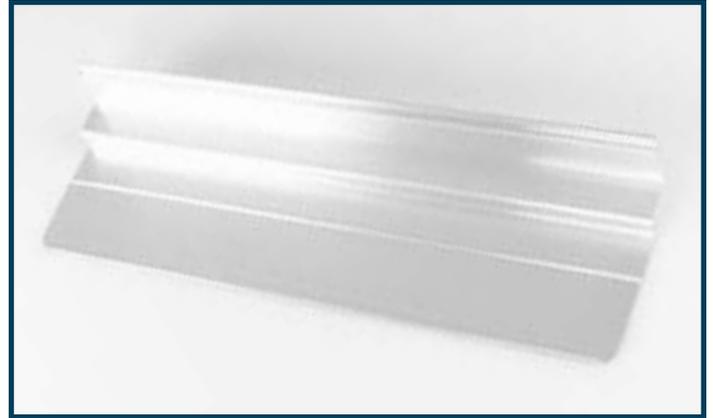

Tray Slides

Corner Brackets

Description

Flat Top TRCB



Corner Brackets (Flat top TRCB)

Corner Bumpers

Description

TMC



Corner Bumpers (TMC)

Dream in Color

Customize Your Space!

True offers a variety of colors! Choose a color from our curated selection, or create your own custom shade to fit your style and design! Our powder coating and liquid paint finishes ensure a flawlessly smooth surface shielded against chipping and stands the test of time.

True's custom hardware is available in handles, hinges, True logo, and lock hasp on selected units. Choose from timeless classics: brass, chrome, gold, or pewter.



Hardware Packages

Contact True for more details.



Brass



Chrome



Gold



Pewter

Standard curated colors shown.

Custom colors available on request.

handles
finishes
hinges
CUSTOM
powder coat



LEARN MORE



Graphic Capabilities

GRAPHIC CAPABILITIES

Drive your sales for bottled drinks, pre-packaged and fresh food, desserts, flowers, and other specialty items with high quality digitally printed signs panels, end and door decals.

- Superior Image Quality
- Vibrant Color Imaging
- White Ink Technology
- Qualified G7 Master Printer



True Stripe Signs are standard on all GDM® models. Availability subject to change. Stainless steel, plain black, plain white and graphic signs are available upon request on most models. Consult factory for details. Upcharges may apply.

REFRIGERATOR SIGNS

| | | |
|--|-----------------|-----------------------|
| | | Item# S-BCBV / S-SCBV |
| | | Item# S-BCJ / S-SCJ |
| | | Item# S-BCW / S-SCW |
| | | Item# S-BED / S-SED |
| | | Item# S-BSD / S-SSD |
| | | Item# S-BCB / S-SCB |
| | | Item# S-BW / S-SW |
| | | Item# S-BCM / S-SCM |
| | | Item# S-BMD / S-SMD |
| | | Item# S-BSS / S-SSS |
| | | Item# S-BDF / S-SDF |
| | | Item# S-BS / S-SS |
| | | Item# S-BFS / S-SFS |
| | | Item# S-BD / S-SD |
| | | Item# S-BFRF / S-SFRF |
| | | Item# S-BNC / S-SNC |
| | WINE | Item# S-TW-16 |
| | DESSERTS BRONZE | Item# S-TD-15 |
| | FLOWERS | Item# S-TF-16 |
| | TRUE STRIPE | Item# S-TS-02 |

Ice Merchandisers, Wine Merchandisers, Glass Four Sided Merchandisers and Floral Cases come standard with their corresponding designed sign. Alternative signs available at no charge if indicated at the time order is placed and shipped from factory. If sign is ordered after unit leaves the factory, an upcharge will apply. Custom signs/graphics available. Please contact factory for details and pricing.

FREEZER SIGNS

| | | |
|--|---------------|-----------------------|
| | | Item# S-BFZF / S-SFZF |
| | | Item# S-BIC / S-SIC |
| | | Item# S-BI / S-SI |
| | | Item# S-BNC / S-SNC |
| | SPARKLING ICE | Item# S-TSI-11 |

VINTAGE UNIT GDM-15-HC-RTO-LD SIGNS



Stainless Steel (Standard)



Wine Red



Market Fresh



Wine Black




Cold Drinks



Wine Gold



* Alternative signs are not field installable and must be indicated at time of order. Please contact customer service for lead time and availability.

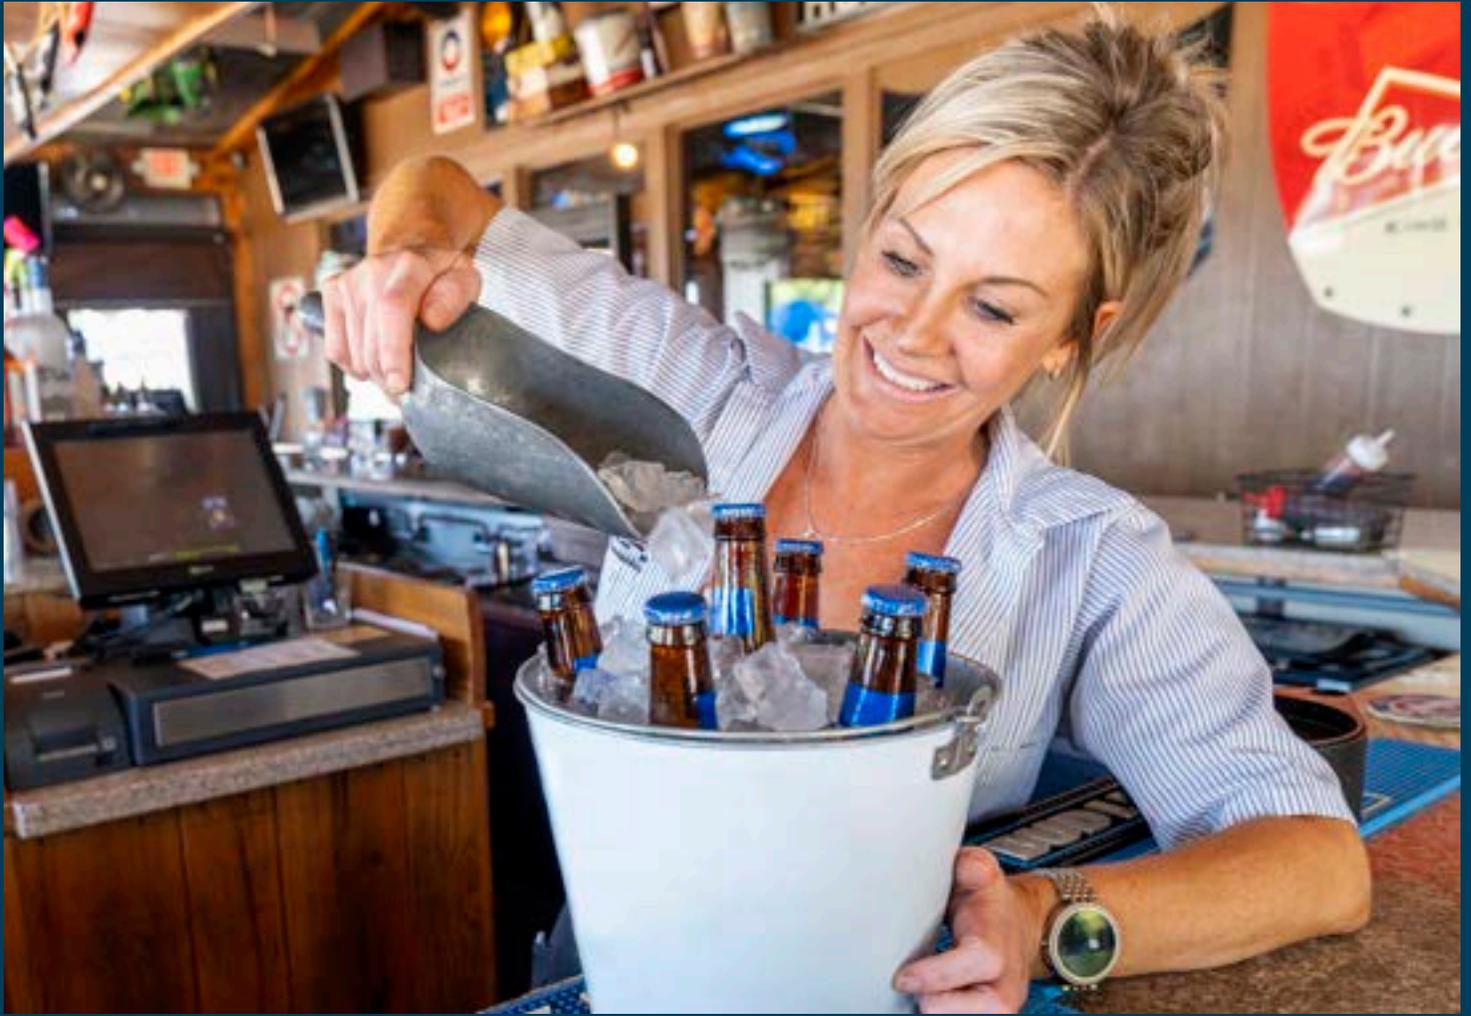





PRODUCT CATALOG
2025

Our extensive support network of True professionals are dedicated to keeping your refrigeration running smoothly.

2001 East Terra Lane, O'Fallon, MO 63366-4434 p: 636.240.2400 f: 636.272.2408 toll free: 800.325.6152 parts toll free: 800.424.8783

truemfg.com |     