



TRUE MANUFACTURING CO., INC.  
RETAIL DIVISION

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400  
Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546  
Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_ Qty: \_\_\_\_\_

Model #: \_\_\_\_\_

A/A #

S/S #

Model:

**CVM-24-HC~EGC01**

## Contemporary Visual Merchandiser:

*Swing Door Refrigerator with Hydrocarbon Refrigerant~Edge Glass Curved Version 01*



## FEATURES

The world's #1 manufacturer of glass door merchandisers.

The curved-edged door design has a built-in handle for opening the door from the top or side.

Illuminated handle position indicator.

Uses environmental friendly R290 Hydrocarbon refrigerant.

Energy efficient, factory balanced, refrigeration system holds 33°F to 38°F (.5°C to 3.3°C).

Self-Cleaning RCU Technology eliminates the need for cleaning of condenser coil, reduces energy consumption and helps maintain the coldest temperature and freshest product.

Exterior digital temperature display.

## ROUGH-IN DATA

Specifications subject to change without notice.  
Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

Model	Doors	Shelves	Cabinet Dimensions (inches) (mm)			HP	Voltage	Amps	NEMA Config.	Cord Length (total ft.) (total m)	Crated Weight (lbs.) (kg)
			W	D†	H						
CVM-24-HC~EGC01	1	6	27 686	29½ 750	78½ 1994	¼ N/A	115/60/1	3.4 N/A	5-15P	10 3.05	330 150

†Depth does not include 1" (26 mm) for rear bumper or 5/8" (16 mm) for rear mechanical components.



APPROVALS:

APPROVALS:

07.25

Printed in U.S.A.

Model:

**CVM-24-HC~EGC01**

## Contemporary Visual Merchandiser:

*Swing Door Refrigerator with Hydrocarbon Refrigerant~Edge Glass Curved Version 01*

**True**®

### STANDARD FEATURES

#### DESIGN

- True's Contemporary Series is built with durability, stability, and style in mind. Through the series' curved edge design it redefines merchandising with its inspired product displays and increased beverage storage.

#### REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & 0.02 global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.
- Listed under NSF/ANSI Standard 7 for the storage and/or display of packaged or bottled product.

#### CABINET CONSTRUCTION

- Exterior - non-peel or chip black powder coated cold rolled steel; durable and permanent.
- Door sign decal. Variety of decal options available.

- Welded, heavy duty steel frame rail, black powder coated for corrosion protection.
- Insulation - entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and 0.02 global warming potential (GWP).
- Interior - attractive, black aluminum interior liner with stainless steel floor.
- Frame rail fitted with leg levels.

#### DOOR

- Self closing door. Positive seal, torsion type closure system.
- The door features an integrated LED handle indicator for a sleek, modern appearance.
- "Low-E", double pane thermal insulated glass door assembly with mitered plastic channel frame. The latest in energy efficient technology.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.
- Edge door will remain black when an alternative interior or exterior finish is ordered.

#### SHELVING

- Six (6) adjustable, black, heavy duty PVC coated wire shelves 22 15/32" L x 23 1/4" D (571mm x 591mm). Four (4) shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on 1/2" (13mm) increments.

#### LIGHTING

- LED interior lighting, safety shielded.

#### ELECTRICAL

- Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.




115/60/1  
NEMA-5-15R

#### OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply.

- ☐ White exterior.
- ☐ Stainless steel exterior.
- ☐ White aluminum interior liner with white shelving.
- ☐ Stainless steel interior liner.
- ☐ 2 1/2" (64 mm) diameter castors.
- ☐ 4" (102 mm) diameter castors.
- ☐ 6" (152 mm) diameter castors.
- ☐ 6" (152 mm) legs.
- ☐ 6" (152 mm) seismic flanged legs
- ☐ Red wine thermostat.
- ☐ White wine thermostat.
- ☐ Chocolate thermostat.
- ☐ Additional shelves.
- ☐ TrueFlex gravity feed organizers.
- ☐ Pricing strips.
- ☐ Left door hinging available.

### PLAN VIEW

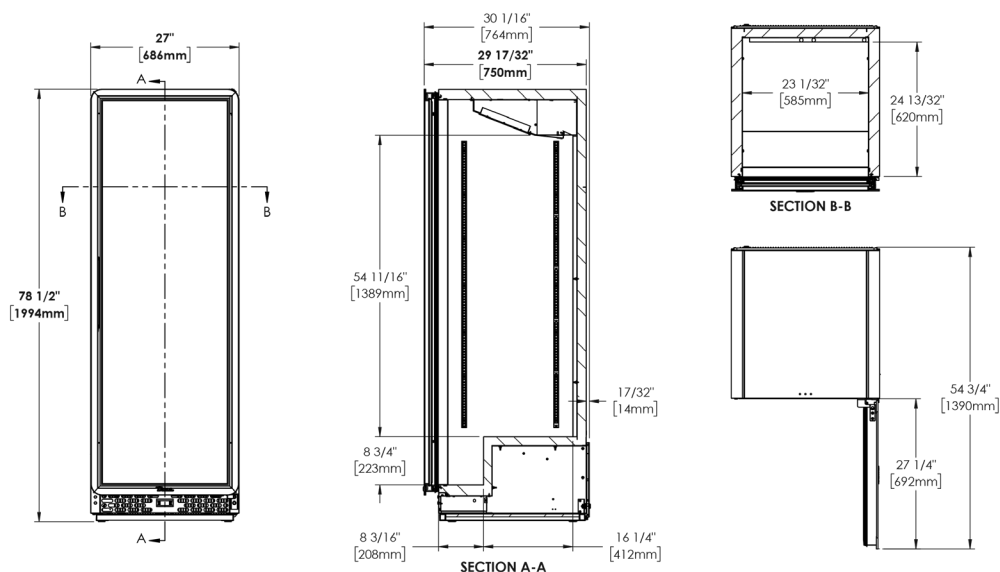

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Model	Elevation	Right	Plan	3D	Back
CVM-24-HC~EGC01					

**TRUE MANUFACTURING CO., INC.**

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • [www.truemfg.com](http://www.truemfg.com)