	• O'Fallon, Missouri 63366-4434 • (636)240-2400	Project Name: Location: Item #:	AIA #	
Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com		Model #:		_
Model: TRCB-82-84-HC	Chef Base: Drawered Refrigerator with Hydro	ocarbon Refrigeran	ot	
			TRCB-82-84	-HC
			 True's refrigerated chef base designed with enduring qua protects your long term inve 	s are ality that
			Designed using the highest materials and components t user with colder product ten lower utility costs, exception safety and the best value in t service marketplace.	o provide the nperatures, nal food
			 Factory engineered, self-con capillary tube system using environmentally friendly R22 carbon refrigerant that has z depletion potential (ODP), & warming potential (GWP). 	90 hydro zero (0) ozone
			Extra large evaporator coil b with higher horsepower con and large condenser; mainta temperatures of 33°F to 38°F 3.3°C) for the best in food pr	npressor ains cabinet - (.5°C to
V			Cabinet top is one piece, hear reinforced stainless steel. Dri "V" edge protects against sp up to 1084 lbs. (492 kg).	ip resistant
		R.	All stainless steel front, top a Corrosion resistant GalFan co back.	
			Left drawer accommodates t and right drawer accommod (2) full size 12"L x 20"W x 4"E	lates two

Heavy-duty stainless steel drawer slides and rollers. Removable without tools for easy cleaning.

x 508 mm x 102 mm) food pans (sold

separately).

Foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest ½" (millimeters rounded up to next whole number).

		Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (lbs.)	
Model	Drawers	W	D†	H*	HP	Voltage	Amps	Config.	((kg)
TRCB-82-84-HC	4	84	321⁄8	201⁄2	1⁄3	115/60/1	4.4	5-15P	10	555
		2134	814	520	1⁄3	220-240V/50-60Hz	2.0		3.05	252
Depth does not include 1" (26	5 mm) for rear bump	ers.						▲ Plug	g type varies	by country.

Depth does not include 1" (26 mm) for rear bumpers.
 * Height does not include 5" (127 mm) for castors or 6" (153 mm) for optional legs.

INTRE USA	APPROVALS:	AVAILABLE AT:
10/22 Printed in U.S.A.		

Model:

TRCB-82-84-HC

Chef Base: Drawered Refrigerator with Hydrocarbon Refrigerant



STANDARD FEATURES

DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, lower utility costs, exceptional food safety and the best value in today's food service marketplace.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydro carbon refrigerant that has zero (0) ozone depletion potential (ODP), & 0.02) global warming potential (GWP).
- Oversized, factory balanced refrigeration system with guided airflow to provide uniform product temperatures.
- Extra large evaporator coil balanced with higher horsepower compressor and large condenser; maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- Sealed, self-lubricating evaporator fan motor and larger fan blades give True chef base units a more efficient, low velocity, high volume airflow design. This unique design ensures faster temperature recovery and shorter run times in the busiest of food service environments.
- Condensing unit accessed from behind side grill; slides out for easy maintenance.

CABINET CONSTRUCTION

- Exterior stainless steel front, top and sides. Corrosion resistant GalFan coated steel back.
- Interior attractive, white aluminum liner. Stainless steel floor with coved corners.

- Insulation entire cabinet structure and drawer facings are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 4" (102 mm) diameter plate castors locks provided on front set.
- Cabinet top is one piece, heavy duty reinforced 300 series stainless steel. Drip resistant "V" edge protects against spills. Supports up to 1084 lbs. (492 kg).

DRAWERS

- Stainless steel exterior drawer facings and liners. Stainless steel drawer frames.
- Each drawer fitted with 12" (305 mm) long recessed handle that is foamed-in-place with a sheet metal interlock to ensure permanent attachment.
- Heavy-duty stainless steel drawer slides and rollers. Removable without tools for easy cleaning.
- Magnetic drawer gaskets of one piece construction, removable without tools for ease of cleaning.
- Each left drawer accommodates three (3) full size 12"L x 20"W x 4"D (305 mm x 508 mm x 102 mm) food pans. Each right drawer acommodates two (2) full size food pans (sold separately).
- Drawers support a wide variety of incremental pan size configurations.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- Exterior digital temperature display.
- NSF/ANSI Standard 7 compliant for open food product.

ELECTRICAL

 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.


115/60/1 NEMA-5-15R

RECOMMENDED OPERATING CONDITIONS

- Counter-top cooking equipment should be used in conjunction with the manufacturer supplied legs. Minimum clearance of 4" (102 mm) is required between bottom of cooking equipment heating element and the TRCB top. Failure to provide clearance voids manufacturer warranty.
- Installation of a heat shield is recommended for optimum performance (supplied by others).

OPTIONAL FEATURES/ACCESSORIES

- Upcharge and lead times may apply.
- 220-240V/50-60Hz
- □ 6" (153 mm) standard legs (1 set of 6 leg mounting plates required).
- □ 6" (153 mm) seismic/flanged legs (1 set of 6 leg mounting plates required).
- Heavy duty, 16 gauge top (available for flat and marine top).
- □ Flat top (no marine edge).
- Additional size drawer divider bars.
- Drawer locks.

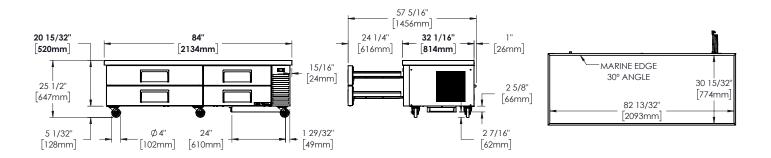

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

TRUE MANUFACTURING CO., INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 • Fax (636)272-2408 • Toll Free (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com

PLAN VIEW